

VIDP

Indira Gandhi Intl


VARG

RATNAGIRI

2024/06/07 0546Z

VIDP IKABA A474 JJP JJP Q2 SG W134 DOGAP VARG

736.84 nm / 1364.63 km

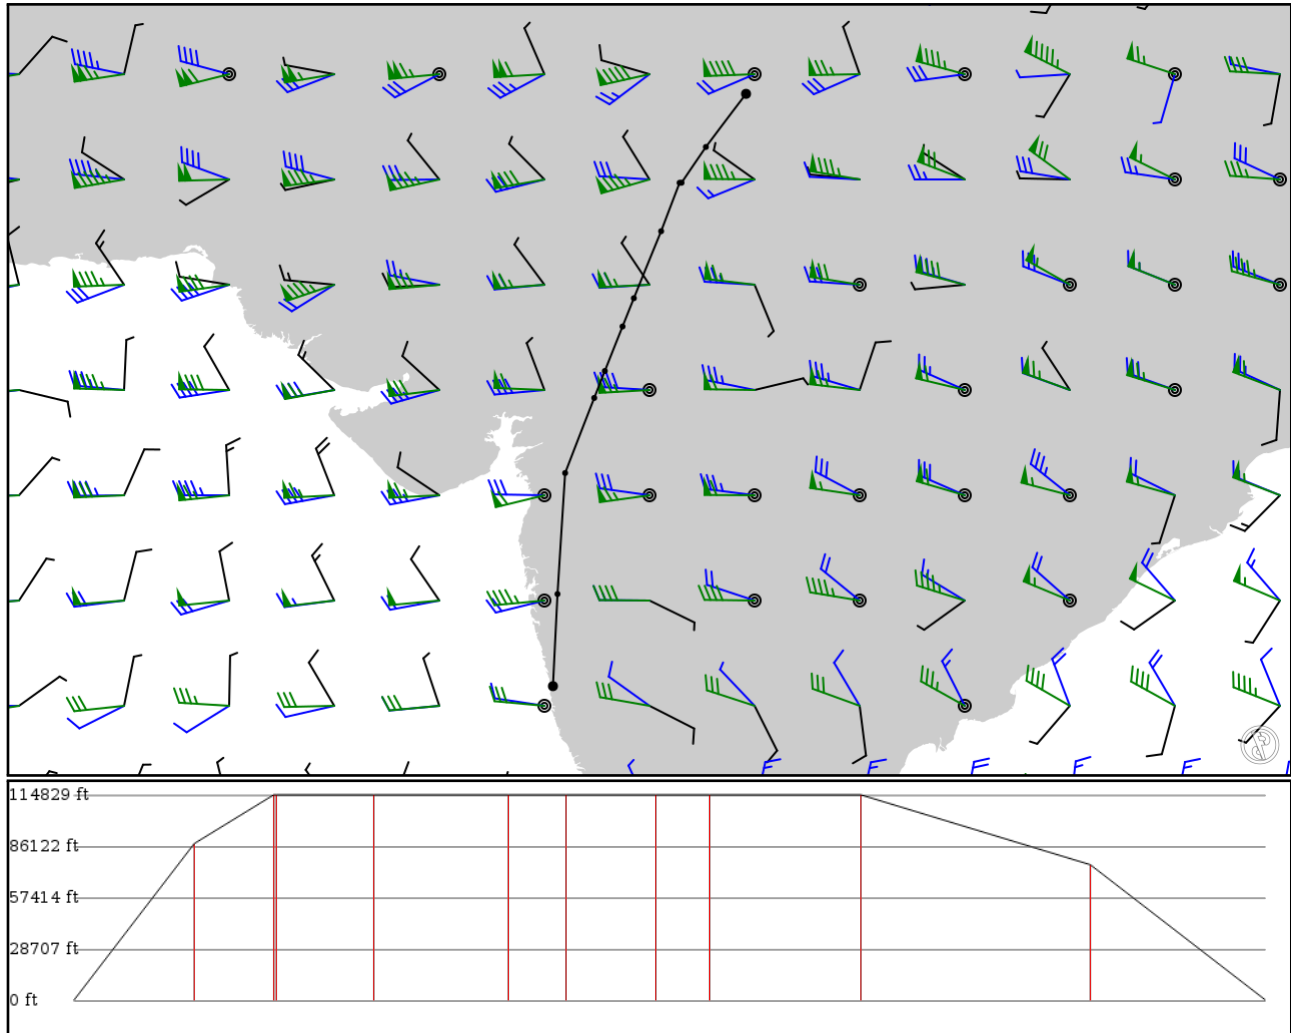

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VIDP	-	28.55850	0 ft	-	Indira Gandhi Intl
APT	-	77.09790	0 m		
IKABA	-	27.52310	26,700 ft	74	-
FIX	-	76.31390	8,138 m		
JJP	A474	26.82590	35,000 ft	48	JAIPUR
VOR	AWY-HI	75.83840	10,668 m		
JJP	-	26.82490	35,000 ft	2	JAIPUR VOR-DME
DME	-	75.80070	10,668 m		
NIKOT	Q2	25.88110	35,000 ft	59	-
FIX	AWY-HI	75.44000	10,668 m		
ADBUK	Q2	24.57530	35,000 ft	83	-
FIX	AWY-HI	74.90750	10,668 m		
AGUPA	Q2	24.02390	35,000 ft	35	-
FIX	AWY-HI	74.68640	10,668 m		
AGRIX	Q2	23.15670	35,000 ft	55	-
FIX	AWY-HI	74.34080	10,668 m		
BEGON	Q2	22.63140	35,000 ft	33	-
FIX	AWY-HI	74.13390	10,668 m		
SG	Q2	21.16750	35,000 ft	93	SONGARH
NDB	AWY-HI	73.56580	10,668 m		
DOGAP	W134	18.80920	23,100 ft	141	-
FIX	AWY-HI	73.41670	7,041 m		
VARG	-	17.01360	0 ft	107	RATNAGIRI
APT	-	73.32780	0 m		

VIDP

Region: INDIA
Timezone: ASIA/KOLKATA
Runways: 3

Elevation: 778 ft / 237 m
Location: 28.558500 77.097900
Magnetic Var: 1.605 E

METAR

VIDP 070530Z 28007KT 4000 HZ NSC 39/12 Q1005 NOSIG

TAF

TAF VIDP 062300Z 0700/0806 24005KT 3000 HZ FEW100 BECMG 0704/0706 32010KT 4000 HZ BECMG 0708/0710 30008G18KT 5000

Frequencies

REC - 126.40 MHz - DELHI ATIS
TWR - 118.10 MHz - DELHI TOWER
APP - 124.20 MHz - DELHI APPROACH
GND - 121.90 MHz - DELHI GROUND
APP - 126.35 MHz - DELHI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	197 ft	14,509 ft	103.69	ASPHALT	2,106 ft	0 ft
	60 m	4,422 m	102.09		642 m	0 m
29	197 ft	14,509 ft	283.72	ASPHALT	4,780 ft	0 ft
	60 m	4,422 m	282.11		1,457 m	0 m
10	150 ft	12,511 ft	104.69	ASPHALT	0 ft	883 ft
	46 m	3,813 m	103.08		0 m	269 m
28	150 ft	12,511 ft	284.71	ASPHALT	0 ft	476 ft
	46 m	3,813 m	283.10		0 m	145 m
09	150 ft	9,219 ft	91.44	ASPHALT	0 ft	197 ft
	46 m	2,810 m	89.84		0 m	60 m
27	150 ft	9,219 ft	271.46	ASPHALT	499 ft	0 ft
	46 m	2,810 m	269.85		152 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	DEL	109.50 MHz	18 nm	-	-	777 ft
				33 km	-		777 m
27	DME	IDLH	110.50 MHz	18 nm	-	-	777 ft
				33 km	-		777 m
28	DME	IPLM	110.30 MHz	18 nm	-	-	777 ft
				33 km	-		777 m
09	LOC-ILS	IDIA	108.50 MHz	18 nm	91.45	-	778 ft
				33 km	89.84		778 m
10	LOC-ILS	IDEL	109.50 MHz	18 nm	104.70	-	778 ft
				33 km	103.09		778 m
27	LOC-ILS	IDLH	110.50 MHz	18 nm	271.45	-	778 ft
				33 km	269.84		778 m
28	LOC-ILS	IPLM	110.30 MHz	18 nm	284.70	-	778 ft
				33 km	283.09		778 m
11	LOC-ILS	IDMR	111.30 MHz	18 nm	103.71	-	778 ft
				33 km	102.10		778 m
29	LOC-ILS	IDGM	110.90 MHz	18 nm	283.71	-	778 ft
				33 km	282.10		778 m
09	GS	IDIA	108.50 MHz	10 nm	91.45	3.00	778 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	89.84		778 m
10	GS	IDEL	109.50 MHz	10 nm	104.70	3.00	778 ft
				19 km	103.09		778 m
27	GS	IDLH	110.50 MHz	10 nm	271.45	3.00	778 ft
				19 km	269.84		778 m
28	GS	IPLM	110.30 MHz	10 nm	284.70	3.00	778 ft
				19 km	283.09		778 m
11	GS	IDMR	111.30 MHz	10 nm	103.71	3.00	778 ft
				19 km	102.10		778 m
29	GS	IDGM	110.90 MHz	10 nm	283.71	3.00	778 ft
				19 km	282.10		778 m