

LFPG

Paris Charles De Gaulle


EHAM

Amsterdam Schiphol

2024/05/01 0439Z

LFPG ADUTO **UN873** FERDI EHAM

215.40 nm / 398.93 km

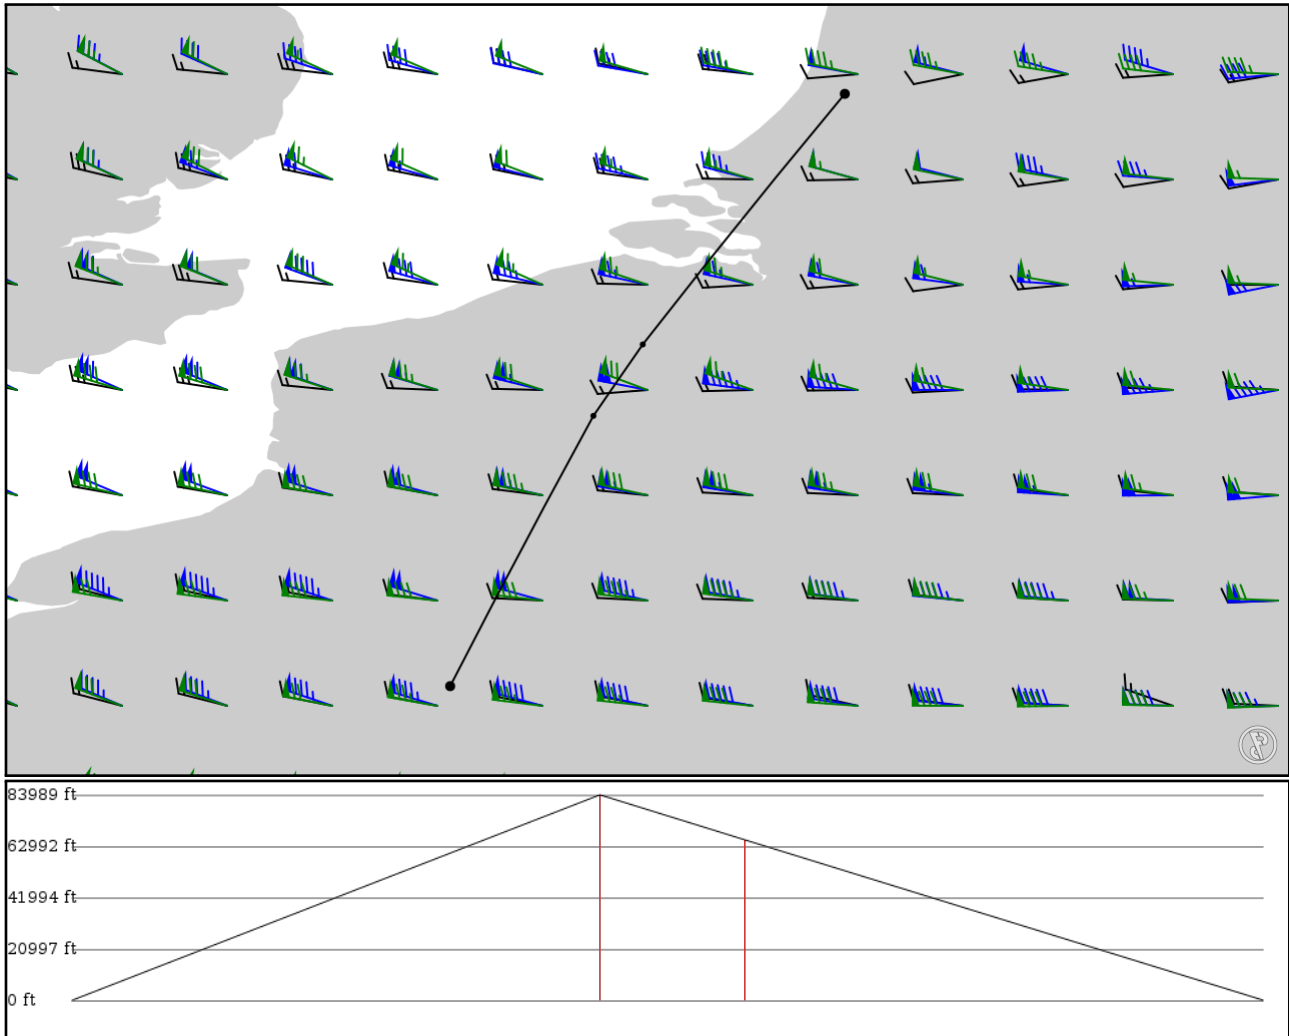

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFPG APT	-	49.00970 2.56257	0 ft 0 m	-	Paris Charles De Gaulle
ADUTO FIX	-	50.51500 3.36167	25,600 ft 7,803 m	95	-
FERDI FIX	UN873 AWY-HI	50.91260 3.63697	20,000 ft 6,096 m	26	-
EHAM APT	-	52.30810 4.76417	0 ft 0 m	93	Amsterdam Schiphol

LFPG

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 4

Elevation: 392 ft / 119 m
Location: 49.009700 2.562570
Magnetic Var: 1.492 E

METAR

LFPG 010400Z 14006KT 9999 BKN048 SCT200 13/11 Q1009 NOSIG

TAF

TAF LFPG 302300Z 0100/0206 14005KT CAVOK TX20/0115Z TN13/0105Z PROB30 TEMPO 0104/0107 3500 BR BKN006 PROB30 TEMPO

Frequencies

REC - 128.32 MHz - ATIS	REC - 127.12 MHz - ATIS
TWR - 120.90 MHz - DE GAULLE TOWER	TWR - 125.32 MHz - DE GAULLE TOWER
TWR - 119.62 MHz - DE GAULLE TOWER	TWR - 119.25 MHz - DE GAULLE TOWER
TWR - 118.65 MHz - DE GAULLE TOWER	TWR - 123.60 MHz - DE GAULLE TOWER
TWR - 120.65 MHz - DE GAULLE TOWER	GND - 121.90 MHz - DE GAULLE GROUND
GND - 125.30 MHz - DE GAULLE GROUND	GND - 121.70 MHz - DE GAULLE GROUND
CLD - 121.80 MHz - CLEARANCE DELIVERY	APP - 118.15 MHz - DE GAULLE APPROACH
APP - 119.85 MHz - DE GAULLE APPROACH	APP - 121.15 MHz - DE GAULLE APPROACH
APP - 125.82 MHz - DE GAULLE APPROACH	APP - 126.42 MHz - DE GAULLE APPROACH
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 133.37 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	13,713 ft	85.31	ASPHALT	0 ft	489 ft
	45 m	4,180 m	83.82		0 m	149 m
26R	148 ft	13,713 ft	265.35	ASPHALT	1,877 ft	279 ft
	45 m	4,180 m	263.86		572 m	85 m
09L	197 ft	8,866 ft	85.32	ASPHALT	0 ft	0 ft
	60 m	2,703 m	83.83		0 m	0 m
27R	197 ft	8,866 ft	265.35	ASPHALT	0 ft	0 ft
	60 m	2,703 m	263.85		0 m	0 m
08R	197 ft	8,833 ft	85.33	ASPHALT	0 ft	489 ft
	60 m	2,692 m	83.83		0 m	149 m
26L	197 ft	8,833 ft	265.35	ASPHALT	0 ft	486 ft
	60 m	2,692 m	263.86		0 m	148 m
09R	148 ft	13,746 ft	85.30	ASPHALT	0 ft	0 ft
	45 m	4,190 m	83.81		0 m	0 m
27L	148 ft	13,746 ft	265.34	ASPHALT	1,959 ft	0 ft
	45 m	4,190 m	263.85		597 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	DSE	108.55 MHz	18 nm	-	-	358 ft
				33 km	-		358 m
09L	DME	PNE	109.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
09R	DME	CGE	110.10 MHz	18 nm	-	-	392 ft
				33 km	-		392 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	DSU	108.35 MHz	18 nm	-	-	338 ft
				33 km	-		338 m
27L	DME	CGW	110.70 MHz	18 nm	-	-	407 ft
				33 km	-		407 m
27R	DME	PNW	110.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
08L	LOC-ILS	GLE	108.70 MHz	18 nm	85.33	-	392 ft
				33 km	83.84		392 m
08R	LOC-ILS	DSE	108.55 MHz	18 nm	85.34	-	392 ft
				33 km	83.85		392 m
09L	LOC-ILS	PNE	109.35 MHz	18 nm	85.33	-	392 ft
				33 km	83.84		392 m
09R	LOC-ILS	CGE	110.10 MHz	18 nm	85.32	-	392 ft
				33 km	83.83		392 m
26L	LOC-ILS	DSU	108.35 MHz	18 nm	265.34	-	392 ft
				33 km	263.85		392 m
26R	LOC-ILS	GAU	111.95 MHz	18 nm	265.33	-	392 ft
				33 km	263.84		392 m
27L	LOC-ILS	CGW	110.70 MHz	18 nm	265.32	-	392 ft
				33 km	263.83		392 m
27R	LOC-ILS	PNW	110.35 MHz	18 nm	265.33	-	392 ft
				33 km	263.84		392 m
08L	GS	GLE	108.70 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.84		392 m
08R	GS	DSE	108.55 MHz	10 nm	85.34	3.00	392 ft
				19 km	83.85		392 m
09L	GS	PNE	109.35 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.84		392 m
09R	GS	CGE	110.10 MHz	10 nm	85.32	3.00	392 ft
				19 km	83.83		392 m
26L	GS	DSU	108.35 MHz	10 nm	265.34	3.00	392 ft
				19 km	263.85		392 m
26R	GS	GAU	111.95 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.84		392 m
27L	GS	CGW	110.70 MHz	10 nm	265.32	3.00	392 ft
				19 km	263.83		392 m
27R	GS	PNW	110.35 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.84		392 m

EHAM

Region: NETHERLANDS
Timezone: EUROPE/AMSTERDAM
Runways: 6

Elevation: -11 ft / -3 m
Location: 52.308100 4.764170
Magnetic Var: 2.039 E

METAR

EHAM 010355Z 32007KT 290V350 CAVOK 14/13 Q1011 NOSIG

TAF

TAF EHAM 302301Z 0100/0206 VRB02KT CAVOK PROB30 TEMPO 0100/0105 28010KT 6000 SHRA SCT050CB BECMG 0101/0104 35007K

Frequencies

GND - 121.55 MHz - SCHIPHOL GROUND	GND - 121.70 MHz - SCHIPHOL GROUND
GND - 121.80 MHz - SCHIPHOL GROUND	GND - 121.90 MHz - SCHIPHOL GROUND
GND - 121.60 MHz - SCHIPHOL GROUND	TWR - 119.22 MHz - SCHIPHOL TOWER
TWR - 118.10 MHz - SCHIPHOL TOWER	TWR - 118.27 MHz - SCHIPHOL TOWER
TWR - 119.90 MHz - SCHIPHOL TOWER	APP - 118.80 MHz - AMSTERDAM RADAR
APP - 120.55 MHz - AMSTERDAM RADAR	APP - 127.78 MHz - AMSTERDAM RADAR
APP - 119.05 MHz - SCHIPHOL APPROACH	APP - 118.08 MHz - SCHIPHOL APPROACH
APP - 126.68 MHz - SCHIPHOL APPROACH	APP - 118.40 MHz - SCHIPHOL ARRIVAL
APP - 131.15 MHz - SCHIPHOL ARRIVAL	DEP - 121.20 MHz - SCHIPHOL DEPARTURE
REC - 122.20 MHz - SCHIPHOL ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	145 ft	11,319 ft	86.77	ASPHALT	325 ft	0 ft
	44 m	3,450 m	84.73		99 m	0 m
27	145 ft	11,319 ft	266.81	ASPHALT	0 ft	0 ft
	44 m	3,450 m	264.77		0 m	0 m
18L	150 ft	11,150 ft	183.24	ASPHALT	1,886 ft	0 ft
	46 m	3,399 m	181.20		575 m	0 m
36R	150 ft	11,150 ft	3.24	ASPHALT	0 ft	0 ft
	46 m	3,399 m	1.20		0 m	0 m
18C	145 ft	10,813 ft	183.22	ASPHALT	0 ft	0 ft
	44 m	3,296 m	181.18		0 m	0 m
36C	145 ft	10,813 ft	3.22	ASPHALT	1,473 ft	0 ft
	44 m	3,296 m	1.18		449 m	0 m
18R	190 ft	12,467 ft	183.19	ASPHALT	886 ft	0 ft
	58 m	3,800 m	181.15		270 m	0 m
36L	190 ft	12,467 ft	3.19	ASPHALT	0 ft	0 ft
	58 m	3,800 m	1.15		0 m	0 m
06	150 ft	11,288 ft	57.85	ASPHALT	814 ft	0 ft
	46 m	3,441 m	55.82		248 m	0 m
24	150 ft	11,288 ft	237.89	ASPHALT	0 ft	0 ft
	46 m	3,441 m	235.85		0 m	0 m
04	140 ft	6,624 ft	41.18	ASPHALT	0 ft	0 ft
	43 m	2,019 m	39.14		0 m	0 m
22	140 ft	6,624 ft	221.20	ASPHALT	0 ft	0 ft
	43 m	2,019 m	219.16		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	KAG	110.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
18R	DME	VPB	110.10 MHz	18 nm 33 km	- -	-	-11 ft -11 m
22	DME	SCH	109.15 MHz	18 nm 33 km	- -	-	-11 ft -11 m
27	DME	BVB	111.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36C	DME	MSA	108.75 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36R	DME	ABA	111.95 MHz	18 nm 33 km	- -	-	-11 ft -11 m
06	LOC-ILS	KAG	110.55 MHz	18 nm 33 km	57.88 55.84	-	-11 ft -11 m
18C	LOC-ILS	ZWA	109.50 MHz	18 nm 33 km	183.22 181.18	-	-11 ft -11 m
18R	LOC-ILS	VPB	110.10 MHz	18 nm 33 km	183.19 181.15	-	-11 ft -11 m
22	LOC-ILS	SCH	109.15 MHz	18 nm 33 km	221.20 219.16	-	-11 ft -11 m
27	LOC-ILS	BVB	111.55 MHz	18 nm 33 km	266.79 264.75	-	-11 ft -11 m
36C	LOC-ILS	MSA	108.75 MHz	18 nm 33 km	3.22 1.18	-	-11 ft -11 m
36R	LOC-ILS	ABA	111.95 MHz	18 nm 33 km	3.24 1.20	-	-11 ft -11 m
06	GS	KAG	110.55 MHz	10 nm 19 km	57.88 55.84	3.00	-11 ft -11 m
18C	GS	ZWA	109.50 MHz	10 nm 19 km	183.22 181.18	3.00	-11 ft -11 m
18R	GS	VPB	110.10 MHz	10 nm 19 km	183.19 181.15	3.00	-11 ft -11 m
22	GS	SCH	109.15 MHz	10 nm 19 km	221.20 219.16	3.00	-11 ft -11 m
27	GS	BVB	111.55 MHz	10 nm 19 km	266.79 264.75	3.00	-11 ft -11 m
36C	GS	MSA	108.75 MHz	10 nm 19 km	3.22 1.18	3.00	-11 ft -11 m
36R	GS	ABA	111.95 MHz	10 nm 19 km	3.24 1.20	3.00	-11 ft -11 m