

RJBB

Kansai Intl


WIII

Jakarta Soekarno-Hatta Intl

2024/06/02 0430Z

RJBB KRE **V53** SUC **B597** SEPIA **Y26** YURIX **Y62** KAZIK **B462** LAO **M646** SAN **B591** LBG **W3** OLRAX **M646** PR PR
M646 VJN **P648** ATOSO WIII

2992.98 nm / 5542.99 km

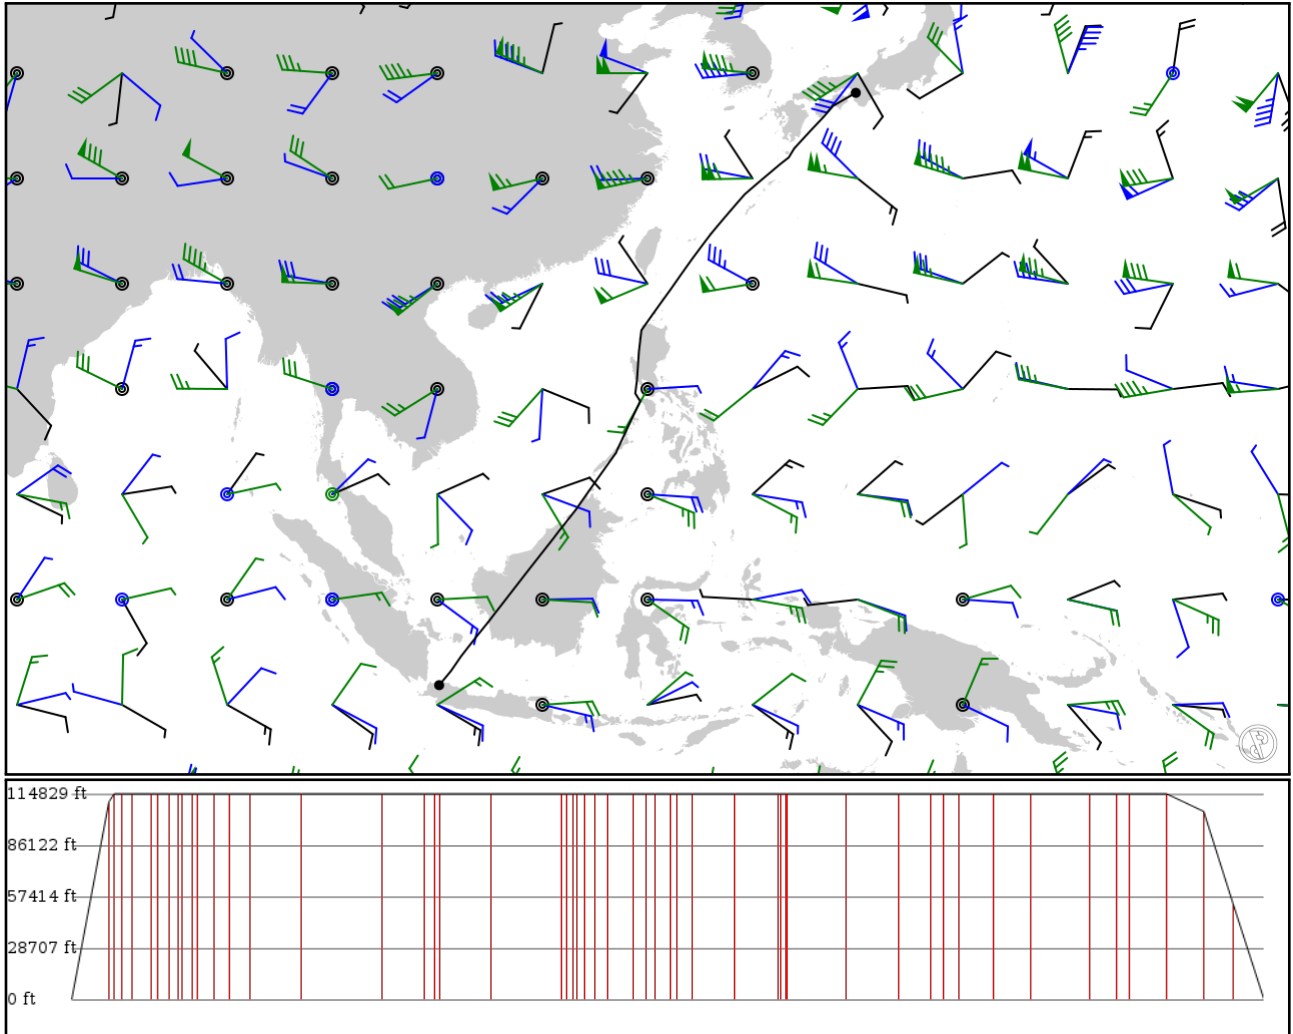

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJBB	-	34.43360	0 ft	-	Kansai Intl
APT	-	135.23400	0 m		
KRE	-	33.54180	33,600 ft	94	KOCHI
VOR	-	133.68000	10,241 m		
SUSAK	V53	33.33950	35,000 ft	15	-
FIX	AWY-HI	133.50400	10,668 m		
OKITU	V53	33.09650	35,000 ft	18	-
FIX	AWY-HI	133.29200	10,668 m		
SUC	V53	32.75600	35,000 ft	25	SHIMIZU
VOR	AWY-HI	132.99700	10,668 m		
MADOG	B597	32.12520	35,000 ft	48	-
FIX	AWY-HI	132.39600	10,668 m		
HIROS	B597	31.92510	35,000 ft	15	-
FIX	AWY-HI	132.20800	10,668 m		
JACKY	B597	31.55470	35,000 ft	28	-
FIX	AWY-HI	131.86300	10,668 m		
QUEEN	B597	31.22630	35,000 ft	25	-
FIX	AWY-HI	131.56000	10,668 m		
JOKER	B597	31.11630	35,000 ft	8	-
FIX	AWY-HI	131.45900	10,668 m		
TEPPO	B597	30.76010	35,000 ft	27	-
FIX	AWY-HI	131.13400	10,668 m		
TGE	B597	30.60220	35,000 ft	11	NAKATANE
VOR	AWY-HI	130.99200	10,668 m		
SEPIA	B597	30.00900	35,000 ft	40	-
FIX	AWY-HI	130.63500	10,668 m		
SWANO	Y26	29.57490	35,000 ft	39	-
FIX	AWY-HI	130.07500	10,668 m		
ANOXA	Y26	28.98880	35,000 ft	50	-
FIX	AWY-HI	129.37700	10,668 m		
YURIX	Y26	27.48810	35,000 ft	129	-
FIX	AWY-HI	127.61500	10,668 m		
IKEMA	Y62	24.78600	35,000 ft	204	-
FIX	AWY-HI	125.30100	10,668 m		
KAZIK	Y62	23.35160	35,000 ft	104	-
FIX	AWY-HI	124.22200	10,668 m		
SADEK	B462	23.00430	35,000 ft	25	-
FIX	AWY-HI	123.96500	10,668 m		
MAGMA	B462	22.79760	35,000 ft	14	-
FIX	AWY-HI	123.81700	10,668 m		
MEVIN	B462	21.00000	35,000 ft	128	-
FIX	AWY-HI	122.55000	10,668 m		
MINIO	B462	18.59550	35,000 ft	174	-
FIX	AWY-HI	120.82200	10,668 m		
TADAO	B462	18.38720	35,000 ft	15	-
FIX	AWY-HI	120.67500	10,668 m		
LAO	B462	18.17880	35,000 ft	15	LAOAG
VOR	AWY-HI	120.52900	10,668 m		
CURIM	M646	18.01250	35,000 ft	10	-
FIX	AWY-HI	120.50900	10,668 m		
KINLA	M646	17.68000	35,000 ft	20	-
FIX	AWY-HI	120.47000	10,668 m		
MELAN	M646	17.26430	35,000 ft	25	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	120.42100	10,668 m		
SAN	M646	16.72840	35,000 ft	32	SAN FERNANDO
VOR	AWY-HI	120.35800	10,668 m		
TAREM	B591	15.67430	35,000 ft	63	-
FIX	AWY-HI	120.28600	10,668 m		
VILAR	B591	15.15630	35,000 ft	31	-
FIX	AWY-HI	120.25100	10,668 m		
SBA	B591	14.76960	35,000 ft	23	SUBIC BAY
VOR	AWY-HI	120.22500	10,668 m		
SUSIE	B591	14.10300	35,000 ft	40	-
FIX	AWY-HI	120.13900	10,668 m		
LBG	B591	13.85410	35,000 ft	15	LUBANG
VOR	AWY-HI	120.10700	10,668 m		
OLRAX	W3	13.31620	35,000 ft	37	-
FIX	AWY-HI	120.44600	10,668 m		
TOKON	M646	11.70050	35,000 ft	107	-
FIX	AWY-HI	119.67500	10,668 m		
GAMAN	M646	10.04510	35,000 ft	109	-
FIX	AWY-HI	118.89500	10,668 m		
TELMO	M646	9.96919	35,000 ft	5	-
FIX	AWY-HI	118.85900	10,668 m		
PR	M646	9.73980	35,000 ft	14	PUERTO PRINCESA
VOR	AWY-HI	118.77000	10,668 m		
PR	-	9.74133	35,000 ft	1	PUERTO PRINCESA VOR-DME
DME	-	118.75300	10,668 m		
OSANU	M646	7.69000	35,000 ft	150	-
FIX	AWY-HI	117.29300	10,668 m		
VJN	M646	5.89925	35,000 ft	131	KOTA KINABALU
VOR	AWY-HI	116.03400	10,668 m		
VJN80	P648	4.85139	35,000 ft	79	-
FIX	AWY-HI	115.21100	10,668 m		
BUTAX	P648	4.43690	35,000 ft	31	-
FIX	AWY-HI	114.87600	10,668 m		
UDERO	P648	3.93060	35,000 ft	38	-
FIX	AWY-HI	114.49400	10,668 m		
ALEMO	P648	2.76250	35,000 ft	89	-
FIX	AWY-HI	113.57200	10,668 m		
OKADA	P648	1.56667	35,000 ft	91	-
FIX	AWY-HI	112.63300	10,668 m		
OMEGA	P648	-0.38333	35,000 ft	148	-
FIX	AWY-HI	111.12000	10,668 m		
OSUKA	P648	-1.29167	35,000 ft	69	-
FIX	AWY-HI	110.41200	10,668 m		
TRIBO	P648	-1.68387	35,000 ft	29	-
FIX	AWY-HI	110.11400	10,668 m		
RAFIS	P648	-2.89269	35,000 ft	93	-
FIX	AWY-HI	109.13600	10,668 m		
AMBOY	P648	-4.13333	32,000 ft	94	-
FIX	AWY-HI	108.16700	9,754 m		
ATOSO	P648	-5.14791	16,200 ft	73	-
FIX	AWY-HI	107.46700	4,938 m		
WIII	-	-6.11981	0 ft	75	Jakarta Soekarno-Hatta Intl
APT	-	106.65700	0 m		

RJBB

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 17 ft / 5 m
Location: 34.433600 135.234000
Magnetic Var: 8.024 W

METAR

RJBB 020400Z 24004KT 180V270 9999 FEW020 FEW025CB SCT070 BKN/// 23/17 Q1006 NOSIG

TAF

TAF TAF RJBB 012306Z 0200/0306 24006KT 9999 FEW025 SCT045 BECMG 0207/0209 03012KT BECMG 0300/0303 25006KT

Frequencies

APP - 120.25 MHz - KANSAI APPROACH	APP - 120.45 MHz - KANSAI APPROACH
APP - 125.50 MHz - KANSAI APPROACH	APP - 124.70 MHz - KANSAI APPROACH
APP - 121.15 MHz - KANSAI APPROACH	APP - 120.85 MHz - KANSAI APPROACH
APP - 125.00 MHz - KANSAI APPROACH	APP - 124.80 MHz - KANSAI APPROACH
APP - 121.20 MHz - KANSAI APPROACH	APP - 120.40 MHz - KANSAI APPROACH
DEP - 119.20 MHz - KANSAI DEPARTURE	DEP - 120.65 MHz - KANSAI DEPARTURE
DEP - 119.50 MHz - KANSAI DEPARTURE	DEP - 119.75 MHz - KANSAI DEPARTURE
TWR - 118.20 MHz - KANSAI TOWER	TWR - 118.05 MHz - KANSAI TOWER
TWR - 126.20 MHz - KANSAI TOWER	GND - 121.60 MHz - KANSAI GROUND
GND - 121.65 MHz - KANSAI GROUND	CLD - 121.90 MHz - KANSAI DELIVERY
REC - 127.85 MHz - ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	13,135 ft	50.85	ASPHALT	0 ft	187 ft
	60 m	4,004 m	58.87		0 m	57 m
24R	197 ft	13,135 ft	230.87	ASPHALT	0 ft	184 ft
	60 m	4,004 m	238.89		0 m	56 m
06R	197 ft	11,493 ft	50.87	ASPHALT	0 ft	187 ft
	60 m	3,503 m	58.89		0 m	57 m
24L	197 ft	11,493 ft	230.88	ASPHALT	0 ft	180 ft
	60 m	3,503 m	238.91		0 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	DME	IKD	108.10 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
24L	DME	IKN	110.70 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
06L	LOC-ILS	IKJ	108.70 MHz	18 nm	50.86	-	17 ft
				33 km	58.88		17 m
06R	LOC-ILS	IKD	108.10 MHz	18 nm	50.88	-	17 ft
				33 km	58.90		17 m
24L	LOC-ILS	IKN	110.70 MHz	18 nm	230.88	-	17 ft
				33 km	238.90		17 m
24R	LOC-ILS	IKW	108.50 MHz	18 nm	230.86	-	17 ft
				33 km	238.88		17 m
06L	GS	IKJ	108.70 MHz	10 nm	50.86	3.00	17 ft
				19 km	58.88		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	GS	IKD	108.10 MHz	10 nm	50.88	3.00	17 ft
				19 km	58.90		17 m
24L	GS	IKN	110.70 MHz	10 nm	230.88	3.00	17 ft
				19 km	238.90		17 m
24R	GS	IKW	108.50 MHz	10 nm	230.86	3.00	17 ft
				19 km	238.88		17 m

WIII

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 3

Elevation: 34 ft / 10 m
Location: -6.119810 106.657000
Magnetic Var: 0.528 E

METAR

WIII 020400Z VRB03KT 5000 HZ FEW020 32/23 Q1011 NOSIG

TAF

TAF WIII 012300Z 0200/0306 22004KT 3000 HZ FEW020 BECMG 0202/0204 05012KT 9999 NSW

Frequencies

REC - 126.85 MHz - ATIS	CLD - 121.95 MHz -
CLD - 124.25 MHz -	SOEKARNO-HATTA CLEARANCE DELIVERY
SOEKARNO-HATTA CLEARANCE DELIVERY	CLD - 125.15 MHz -
GND - 121.60 MHz - SOEKARNO-HATTA GROUND	SOEKARNO-HATTA CLEARANCE DELIVERY
GND - 128.85 MHz - SOEKARNO-HATTA GROUND	GND - 121.00 MHz - SOEKARNO-HATTA GROUND
TWR - 118.20 MHz - SOEKARNO-HATTA TOWER	GND - 128.95 MHz - SOEKARNO-HATTA GROUND
TWR - 119.30 MHz - SOEKARNO-HATTA TOWER	TWR - 118.75 MHz - SOEKARNO-HATTA TOWER
APP - 124.20 MHz - JAKARTA ARRIVAL	TWR - 120.25 MHz - SOEKARNO-HATTA TOWER
APP - 119.75 MHz - JAKARTA DIRECTOR	APP - 125.45 MHz - JAKARTA ARRIVAL
APP - 124.55 MHz - JAKARTA DIRECTOR	APP - 123.75 MHz - JAKARTA DIRECTOR
APP - 125.05 MHz - JAKARTA DIRECTOR	APP - 124.95 MHz - JAKARTA DIRECTOR
APP - 124.15 MHz - JAKARTA RADAR	APP - 127.90 MHz - JAKARTA DIRECTOR
APP - 125.35 MHz - JAKARTA RADAR	APP - 124.35 MHz - JAKARTA RADAR
APP - 127.95 MHz - JAKARTA RADAR	APP - 126.45 MHz - JAKARTA RADAR
	APP - 130.10 MHz - JAKARTA RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	8,202 ft	68.13	ASPHALT	328 ft	846 ft
	46 m	2,500 m	67.61		100 m	258 m
24	150 ft	8,202 ft	248.13	ASPHALT	0 ft	0 ft
	46 m	2,500 m	247.60		0 m	0 m
07L	197 ft	11,820 ft	68.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	67.62		0 m	0 m
25R	197 ft	11,820 ft	248.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	247.62		0 m	0 m
07R	197 ft	12,015 ft	68.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	67.59		0 m	0 m
25L	197 ft	12,015 ft	248.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	247.59		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	ICHL	111.50 MHz	18 nm	68.13	-	21 ft
				33 km	67.60		21 m
07R	LOC-ILS	ICHR	110.50 MHz	18 nm	68.13	-	27 ft
				33 km	67.60		27 m
25L	LOC-ILS	ICGL	111.10 MHz	18 nm	248.12	-	34 ft
				33 km	247.59		34 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	LOC-ILS	ICGR	110.90 MHz	18 nm	248.13	-	29 ft
				33 km	247.60		29 m
07L	GS	ICHL	111.50 MHz	10 nm	68.25	3.00	29 ft
				19 km	67.72		29 m
07R	GS	ICHR	110.50 MHz	10 nm	68.24	3.00	34 ft
				19 km	67.72		34 m
25L	GS	ICGL	111.10 MHz	10 nm	248.24	3.00	27 ft
				19 km	247.72		27 m
25R	GS	ICGR	110.90 MHz	10 nm	248.25	3.00	21 ft
				19 km	247.72		21 m