


2024/05/03 0112Z

K88 PINNE **V13** RZC **V527** HOT **V71** HEZ SETTA KNEW

546.51 nm / 1012.14 km

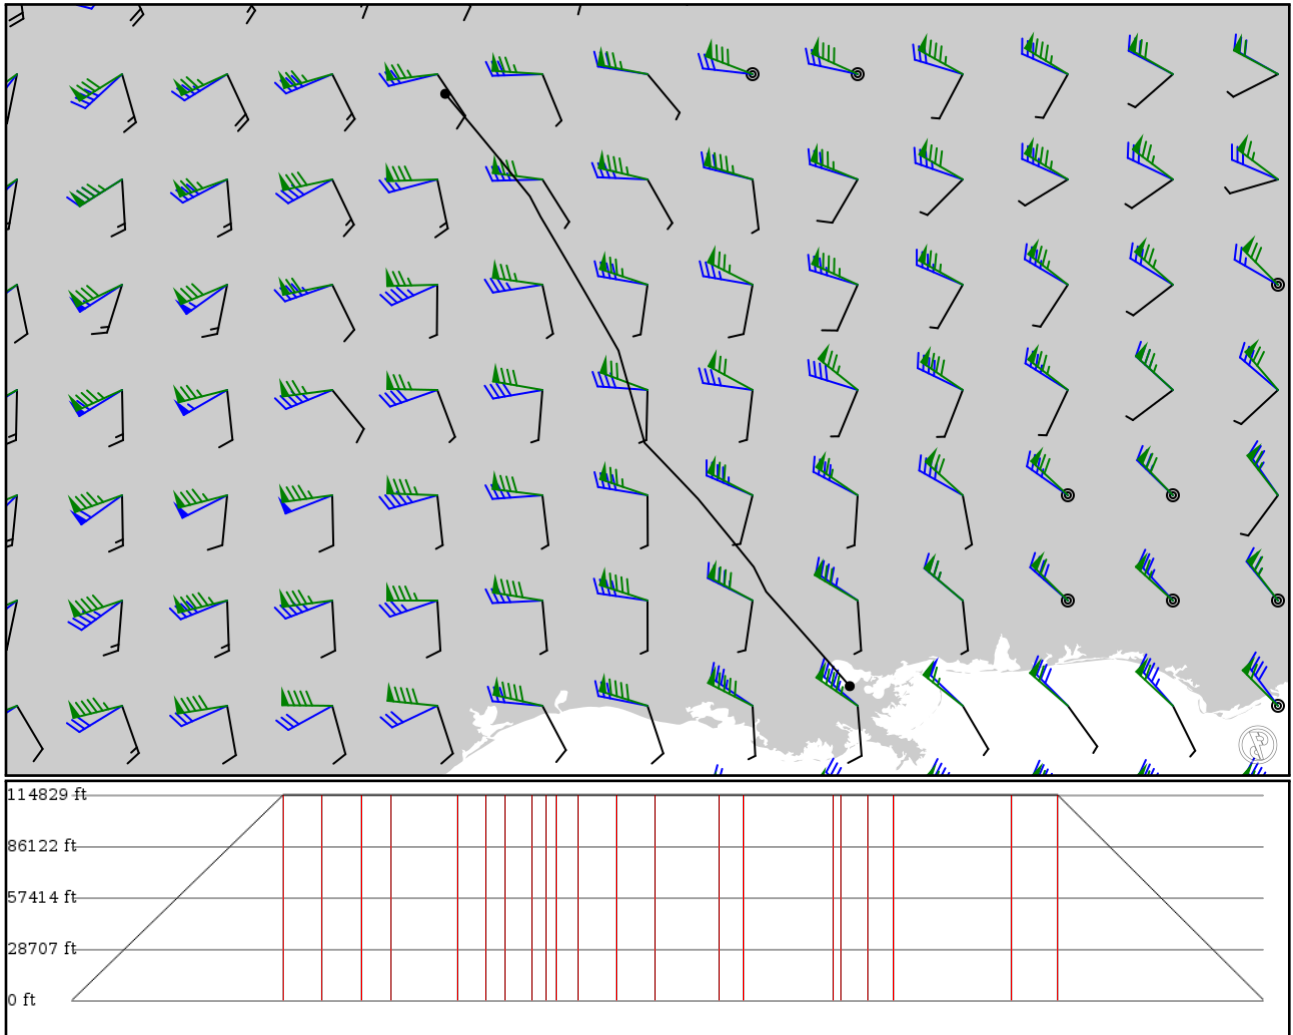

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 180kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
K88 APT	-	37.87230 -95.38470	0 ft 0 m	-	ALLEN CO
PINNE FIX	-	36.51850 -94.26420	35,000 ft 10,668 m	97	-
RZC VOR	V13 AWY-LO	36.24640 -94.12140	35,000 ft 10,668 m	17	RAZORBACK (FAYETTEVILLE)
WESTY FIX	V527 AWY-LO	35.97630 -93.96060	35,000 ft 10,668 m	18	-
CASKS FIX	V527 AWY-LO	35.77170 -93.83960	35,000 ft 10,668 m	13	-
SCRAN FIX	V527 AWY-LO	35.31610 -93.57260	35,000 ft 10,668 m	30	-
DANIL FIX	V527 AWY-LO	35.11740 -93.45730	35,000 ft 10,668 m	13	-
ROVER FIX	V527 AWY-LO	34.98360 -93.37990	35,000 ft 10,668 m	8	-
VALLS FIX	V527 AWY-LO	34.79960 -93.27400	35,000 ft 10,668 m	12	-
HIDER FIX	V527 AWY-LO	34.70320 -93.21880	35,000 ft 10,668 m	6	-
KRAMS FIX	V527 AWY-LO	34.63040 -93.17720	35,000 ft 10,668 m	4	-
HOT VOR	V527 AWY-LO	34.47860 -93.09060	35,000 ft 10,668 m	10	HOT SPRINGS
CANEY FIX	V71 AWY-LO	34.19300 -93.00870	35,000 ft 10,668 m	17	-
SPARO FIX	V71 AWY-LO	33.91090 -92.92830	35,000 ft 10,668 m	17	-
DODBE FIX	V71 AWY-LO	33.43500 -92.79400	35,000 ft 10,668 m	29	-
ELD VOR	V71 AWY-LO	33.25620 -92.74390	35,000 ft 10,668 m	11	EL DORADO
FLESH FIX	V71 AWY-LO	32.72510 -92.23390	35,000 ft 10,668 m	40	-
ZETEG FIX	V71 AWY-LO	32.67310 -92.18430	35,000 ft 10,668 m	4	-
MLU VOR	V71 AWY-LO	32.51690 -92.03600	35,000 ft 10,668 m	12	MONROE
ZAROX FIX	V71 AWY-LO	32.35280 -91.90030	35,000 ft 10,668 m	12	-
HEZ VOR	V71 AWY-LO	31.61820 -91.29960	35,000 ft 10,668 m	53	NATCHEZ
SETTA FIX	-	31.29040 -91.13470	35,000 ft 10,668 m	21	-
KNEW APT	-	30.04190 -90.02770	0 ft 0 m	94	Lakefront

KNEW

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 7 ft / 2 m
Location: 30.041900 -90.027700
Magnetic Var: 1.608 W

METAR

KNEW 030053Z 15017G23KT 10SM FEW120 27/22 A2984 RMK A02 SLP097 T02670217

TAF

KNEW 022333Z 0300/0324 15010KT P6SM SCT030 OVC090 FM031000 15007KT P6SM BKN015 BKN060 FM031500 14008KT P6SM VCSH I

Frequencies

REC - 124.90 MHz - ATIS	COM - 119.90 MHz - CTAF
COM - 122.95 MHz - UNICOM	CLD - 119.90 MHz - CLNC DEL
CLD - 127.40 MHz - CLNC DEL	GND - 121.70 MHz -
TWR - 119.90 MHz -	TWR - 125.65 MHz -
APP - 123.85 MHz - NEW ORLEANS APP/DEP	APP - 133.15 MHz - NEW ORLEANS APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	150 ft	6,904 ft	179.27	ASPHALT	240 ft	0 ft
	46 m	2,104 m	180.87		73 m	0 m
36L	150 ft	6,904 ft	359.27	ASPHALT	820 ft	0 ft
	46 m	2,104 m	0.87		250 m	0 m
18L	75 ft	3,710 ft	179.26	ASPHALT	0 ft	0 ft
	23 m	1,131 m	180.87		0 m	0 m
36R	75 ft	3,710 ft	359.26	ASPHALT	0 ft	0 ft
	23 m	1,131 m	0.87		0 m	0 m
09	75 ft	3,108 ft	89.20	ASPHALT	0 ft	59 ft
	23 m	947 m	90.81		0 m	18 m
27	75 ft	3,108 ft	269.20	ASPHALT	0 ft	49 ft
	23 m	947 m	270.81		0 m	15 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	DME	INEW	111.30 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
18R	LOC-ILS	INEW	111.30 MHz	18 nm	179.26	-	7 ft
				33 km	180.86		7 m
18R	GS	INEW	111.30 MHz	10 nm	179.53	3.00	4 ft
				19 km	181.14		4 m