

TTPP

Piarco Intl


SVMI

Maiquetia Simon Bolivar Intl

2024/05/29 0121Z

TTPP MEGIR UA552 CBC SVMI

334.60 nm / 619.68 km

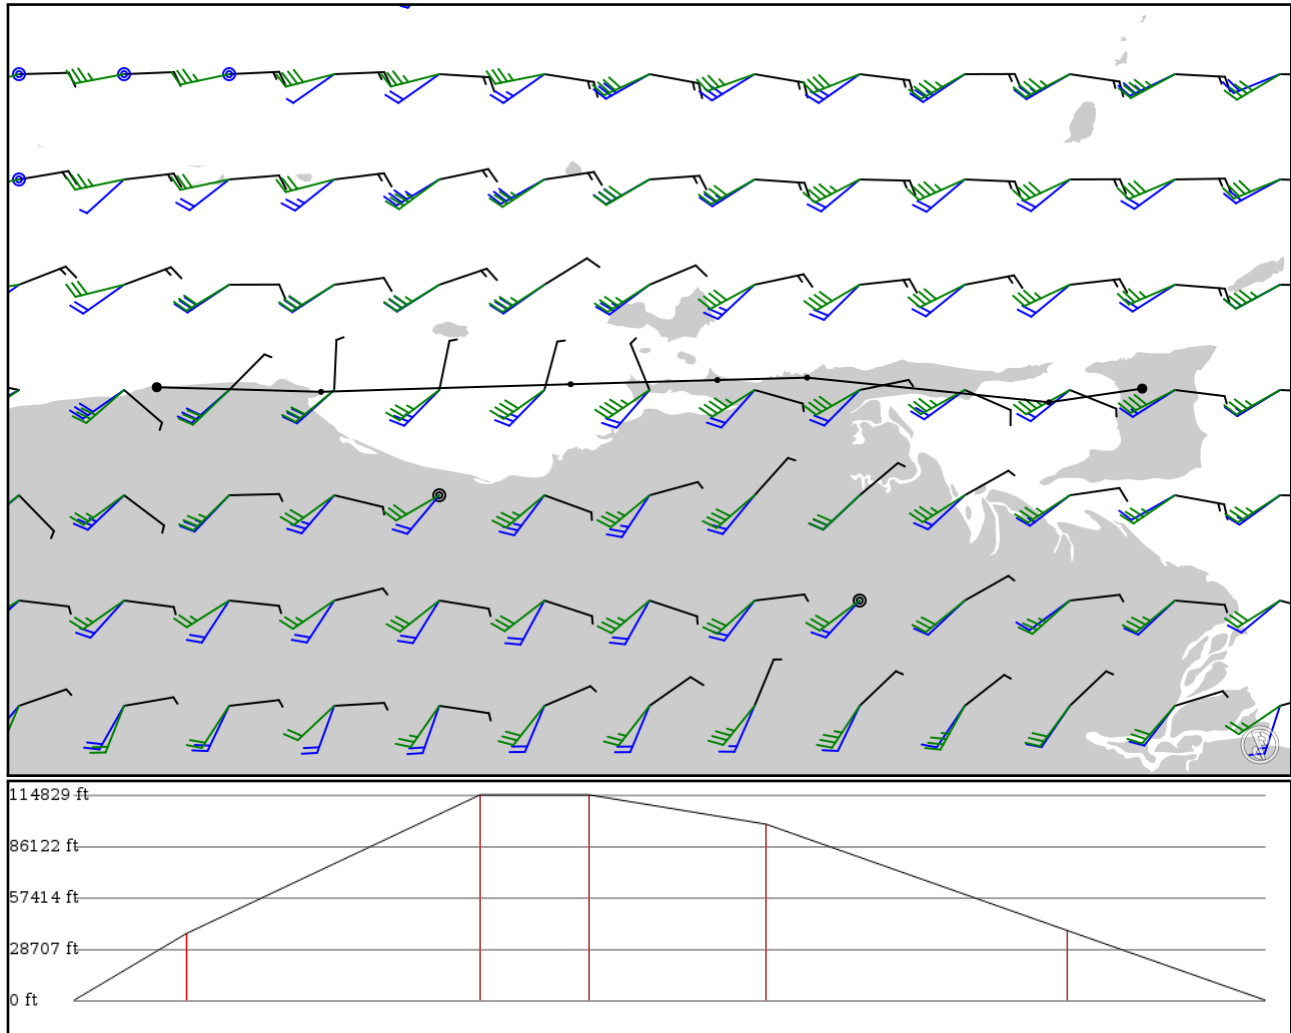

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
TTPP	-	10.59540	0 ft	-	Piarco Intl
APT	-	-61.33730	0 m		
MEGIR	-	10.51670	11,400 ft	31	-
FIX	-	-61.87220	3,475 m		
ESNAP	UA552	10.65810	35,000 ft	82	-
FIX	AWY-HI	-63.25940	10,668 m		
UGIRO	UA552	10.64440	35,000 ft	30	-
FIX	AWY-HI	-63.77420	10,668 m		
TOSIP	UA552	10.62030	30,000 ft	49	-
FIX	AWY-HI	-64.61610	9,144 m		
CBC	UA552	10.57690	11,900 ft	84	CABO CODERA VOR-DME
DME	AWY-HI	-66.04810	3,627 m		
SVMI	-	10.60320	0 ft	55	Maiquetia Simon Bolivar Intl
APT	-	-66.99040	0 m		

TTPP

Region: TRINIDAD AND TOBAGO
Timezone: AMERICA/PORT_OF_SPAIN
Runways: 1

Elevation: 57 ft / 17 m
Location: 10.595400 -61.337300
Magnetic Var: 15.354 W

METAR

TTPP 290100Z 11005KT 9999 FEW016 28/25 Q1015 NOSIG

TAF

TAF TTPP 282200Z 2900/2924 09005KT 9999 FEW018 BECMG 2912/2914 10015G25KT SCT025 PROB40 TEMPO 2917/2922 5000 SHRA

Frequencies

REC - 126.70 MHz - ATIS
TWR - 118.10 MHz - PIARCO TOWER
APP - 119.55 MHz - PIARCO APPROACH
GND - 121.90 MHz - PIARCO GROUND
APP - 119.00 MHz - PIARCO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	151 ft	10,505 ft	89.80	ASPHALT	0 ft	62 ft
	46 m	3,202 m	105.16		0 m	19 m
28	151 ft	10,505 ft	269.81	ASPHALT	0 ft	180 ft
	46 m	3,202 m	285.16		0 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	IPOS	109.70 MHz	18 nm	-	-	57 ft
				33 km	-		57 m
10	LOC-ILS	IPOS	109.70 MHz	18 nm	89.49	-	57 ft
				33 km	104.84		57 m
10	GS	IPOS	109.70 MHz	10 nm	90.67	3.00	57 ft
				19 km	106.02		57 m

SVMI

Region: VENEZUELA
Timezone: AMERICA/CARACAS
Runways: 2

Elevation: 234 ft / 71 m
Location: 10.603200 -66.990400
Magnetic Var: 12.877 W

METAR

SVMI 290100Z 09003KT 9999 FEW016 28/23 Q1013

TAF

TAF SVMI 281600Z 2818/2918 09009KT 9999 FEW016 SCT080 TX33/2818Z TN24/2908Z TEMPO 2820/2823 07010KT 9000 VCDZ SCT

Frequencies

CLD - 119.50 MHz - CLEARANCE DELIVERY
TWR - 118.40 MHz - MAIQUETIA TOWER
DEP - 120.10 MHz - MAIQUETIA DEPARTURE
GND - 121.90 MHz - MAIQUETIA GROUND
APP - 120.40 MHz - MAIQUETIA APPROACH
REC - 132.85 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	151 ft	11,494 ft	88.13	ASPHALT	0 ft	187 ft
	46 m	3,503 m	101.00		0 m	57 m
28	151 ft	11,494 ft	268.13	ASPHALT	0 ft	187 ft
	46 m	3,503 m	281.01		0 m	57 m
09	151 ft	9,523 ft	75.94	ASPHALT	0 ft	0 ft
	46 m	2,903 m	88.82		0 m	0 m
27	151 ft	9,523 ft	255.95	ASPHALT	0 ft	0 ft
	46 m	2,903 m	268.83		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	IMIQ	110.10 MHz	18 nm	-	-	235 ft
				33 km	-		235 m
10	LOC-ILS	IMIQ	110.10 MHz	18 nm	87.90	-	235 ft
				33 km	100.78		235 m
10	GS	IMIQ	110.10 MHz	10 nm	88.29	3.00	235 ft
				19 km	101.16		235 m