


KLGA
La Guardia

KFLL
Fort Lauderdale-Hollywood Intl

2024/05/06 1052Z

KLGA LEEAH V1 SBY J209 SAWED J121 ORF J174 DIW AR18 OZENA AR23 CANIT M202 ADOOR BR65V STIFF A699
PERMT KFLL

957.92 nm / 1774.07 km

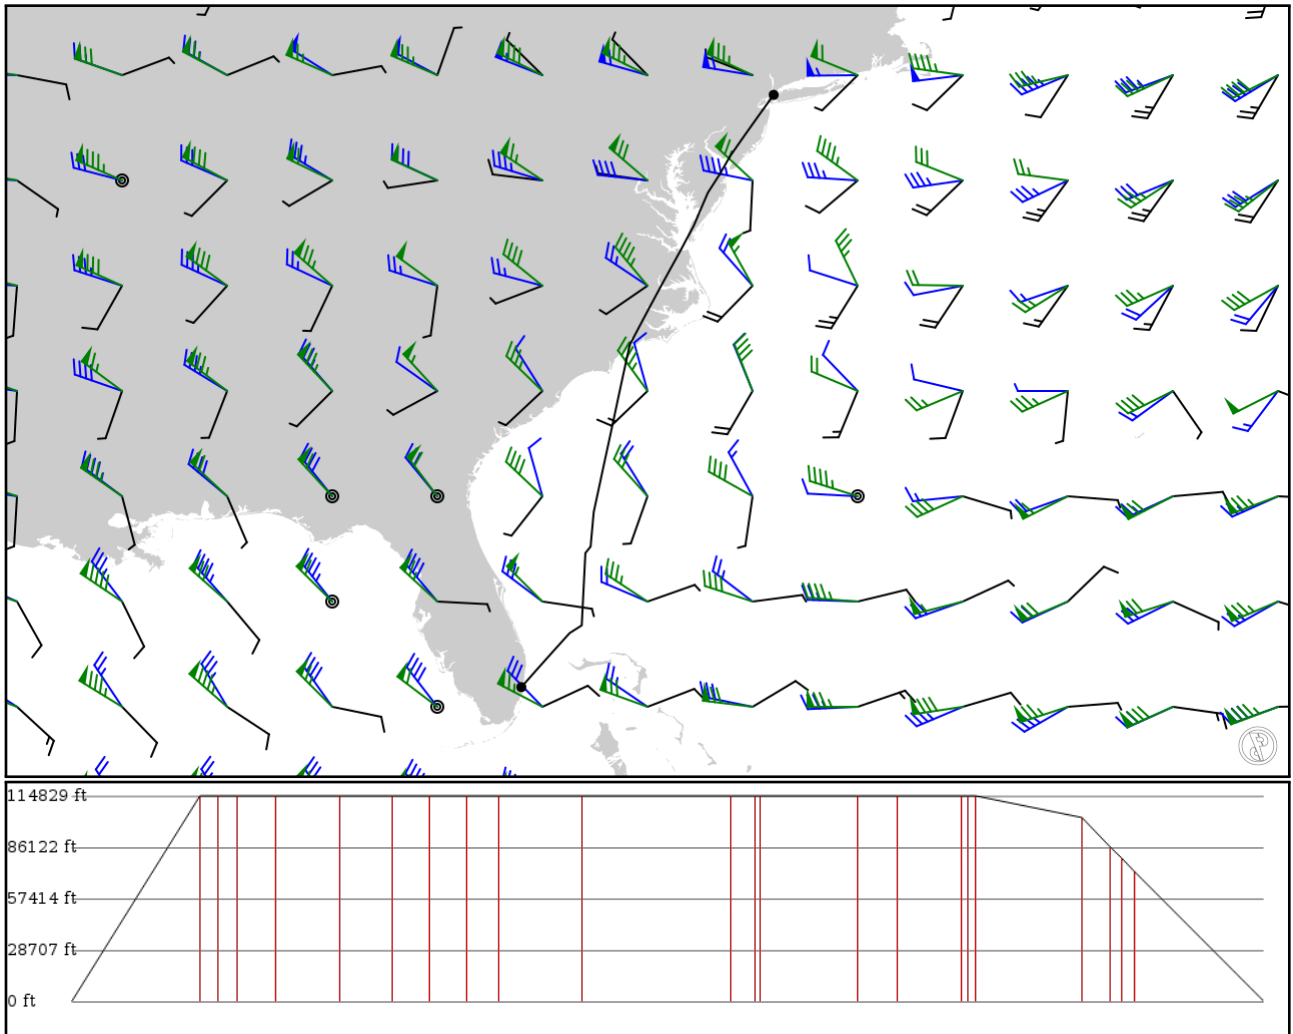

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLGA	-	40.77720	0 ft	-	La Guardia
APT	-	-73.87260	0 m		
LEEAH	-	39.26090	35,000 ft	103	-
FIX	-	-74.95310	10,668 m		
PEAPS	V1	39.04190	35,000 ft	14	-
FIX	AWY-LO	-75.07890	10,668 m		
ATR	V1	38.80980	35,000 ft	15	WATERLOO
VOR	AWY-LO	-75.21130	10,668 m		
SBY	V1	38.34500	35,000 ft	31	SALISBURY
VOR	AWY-LO	-75.51060	10,668 m		
SAWED	J209	37.53350	35,000 ft	51	-
FIX	AWY-HI	-75.85810	10,668 m		
ORF	J121	36.89190	35,000 ft	41	NORFOLK
VOR	AWY-HI	-76.20030	10,668 m		
EDDYS	J174	36.44040	35,000 ft	29	-
FIX	AWY-HI	-76.45010	10,668 m		
GILMA	J174	35.97670	35,000 ft	30	-
FIX	AWY-HI	-76.70340	10,668 m		
CLAPY	J174	35.59470	35,000 ft	25	-
FIX	AWY-HI	-76.90950	10,668 m		
DIW	J174	34.56850	35,000 ft	67	DIXON
NDB	AWY-HI	-77.45290	10,668 m		
PANAL	AR18	32.60910	35,000 ft	119	-
FIX	AWY-HI	-77.87580	10,668 m		
MILOE	AR18	32.29110	35,000 ft	19	-
FIX	AWY-HI	-77.94440	10,668 m		
LURKS	AR18	32.21610	35,000 ft	4	-
FIX	AWY-HI	-77.96070	10,668 m		
LANIE	AR18	30.94160	35,000 ft	77	-
FIX	AWY-HI	-78.23560	10,668 m		
OZENA	AR18	30.41940	35,000 ft	31	-
FIX	AWY-HI	-78.34830	10,668 m		
CANIT	AR23	29.56250	35,000 ft	51	-
FIX	AWY-HI	-78.42580	10,668 m		
ETECK	M202	29.48570	35,000 ft	5	-
FIX	AWY-HI	-78.48730	10,668 m		
ADOOR	M202	29.40010	35,000 ft	6	-
FIX	AWY-HI	-78.55570	10,668 m		
ELDER	BR65V	27.99120	31,300 ft	84	-
FIX	AWY-HI	-78.62700	9,540 m		
STIFF	BR65V	27.60520	26,300 ft	23	-
FIX	AWY-HI	-78.64610	8,016 m		
RAMJT	A699	27.52040	24,400 ft	8	-
FIX	AWY-HI	-78.78000	7,437 m		
PERMT	A699	27.41420	22,100 ft	10	-
FIX	AWY-HI	-78.94730	6,736 m		
KFLL	-	26.07130	0 ft	103	Fort Lauderdale-Hollywood Intl
APT	-	-80.14950	0 m		

KLGA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 21 ft / 6 m
Location: 40.777200 -73.872600
Magnetic Var: 12.802 W

METAR

KLGA 061015Z 04005KT 1/4SM R04/2800V5000FT -DZ FG OVC002 11/11 A3004 RMK A02 DZB15 P0000 T01110106 \$

TAF

TAF AMD KLGA 060832Z 0609/0712 06005KT 3SM BR OVC004 FM061600 VRB04KT P6SM BKN008 FM061800 29005KT P6SM SCT008 BKN012

Frequencies

REC - 125.95 MHz - ATIS ARRIVAL	REC - 127.05 MHz - ATIS DEPARTURE
TWR - 118.70 MHz - LAGUARDIA TOWER	GND - 121.70 MHz - LAGUARDIA GROUND
GND - 121.85 MHz - LAGUARDIA GROUND	GND - 127.67 MHz - LAGUARDIA GROUND
CLD - 121.87 MHz - LAGUARDIA CLEARANCE	CLD - 135.20 MHz - LAGUARDIA CLEARANCE
COM - 122.95 MHz - LAGUARDIA UNICOM	APP - 132.70 MHz - NEW YORK APPROACH
APP - 120.05 MHz - NEW YORK APPROACH	APP - 120.80 MHz - NEW YORK APPROACH
APP - 124.95 MHz - NEW YORK APPROACH	APP - 127.30 MHz - NEW YORK APPROACH
APP - 128.80 MHz - NEW YORK APPROACH	DEP - 120.40 MHz - NEW YORK DEPARTURE
DEP - 124.45 MHz - NEW YORK DEPARTURE	DEP - 127.05 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	150 ft	7,006 ft	32.03	ASPHALT	0 ft	322 ft
	46 m	2,135 m	44.83		0 m	98 m
22	150 ft	7,006 ft	212.04	ASPHALT	0 ft	98 ft
	46 m	2,135 m	224.84		0 m	30 m
13	150 ft	6,994 ft	122.24	ASPHALT	0 ft	95 ft
	46 m	2,132 m	135.04		0 m	29 m
31	150 ft	6,994 ft	302.25	ASPHALT	0 ft	374 ft
	46 m	2,132 m	315.06		0 m	114 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13	DME	IGDI	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
31	DME	IPZV	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
04	LOC-ILS	ILGA	110.50 MHz	18 nm	32.04	-	21 ft
				33 km	44.84		21 m
13	LOC-ILS	IGDI	108.50 MHz	18 nm	122.25	-	21 ft
				33 km	135.05		21 m
22	LOC-ILS	IURD	110.50 MHz	18 nm	212.04	-	21 ft
				33 km	224.84		21 m
31	LOC-LOC	IPZV	108.50 MHz	18 nm	302.25	-	21 ft
				33 km	315.05		21 m
04	GS	ILGA	110.50 MHz	10 nm	32.04	3.10	21 ft
				19 km	44.84		21 m
13	GS	IGDI	108.50 MHz	10 nm	122.25	3.10	21 ft
				19 km	135.05		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	GS	IURD	110.50 MHz	10 nm	212.04	3.00	21 ft
				19 km	224.84		21 m

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.389 W

METAR

KFLL 060953Z 13008KT 10SM SCT030 27/19 A3000 RMK A02 SLP157 T02670194

TAF

TAF AMD KFLL 060835Z 0609/0712 10010KT P6SM FEW030 SCT250 FM061200 11013KT P6SM FEW025 SCT050 FM070300 12007KT P6SM

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m