


2024/05/07 0150Z

RCSS AISAR **A1** KOSHI **Y50** BUPPO RJTT

1139.42 nm / 2110.21 km

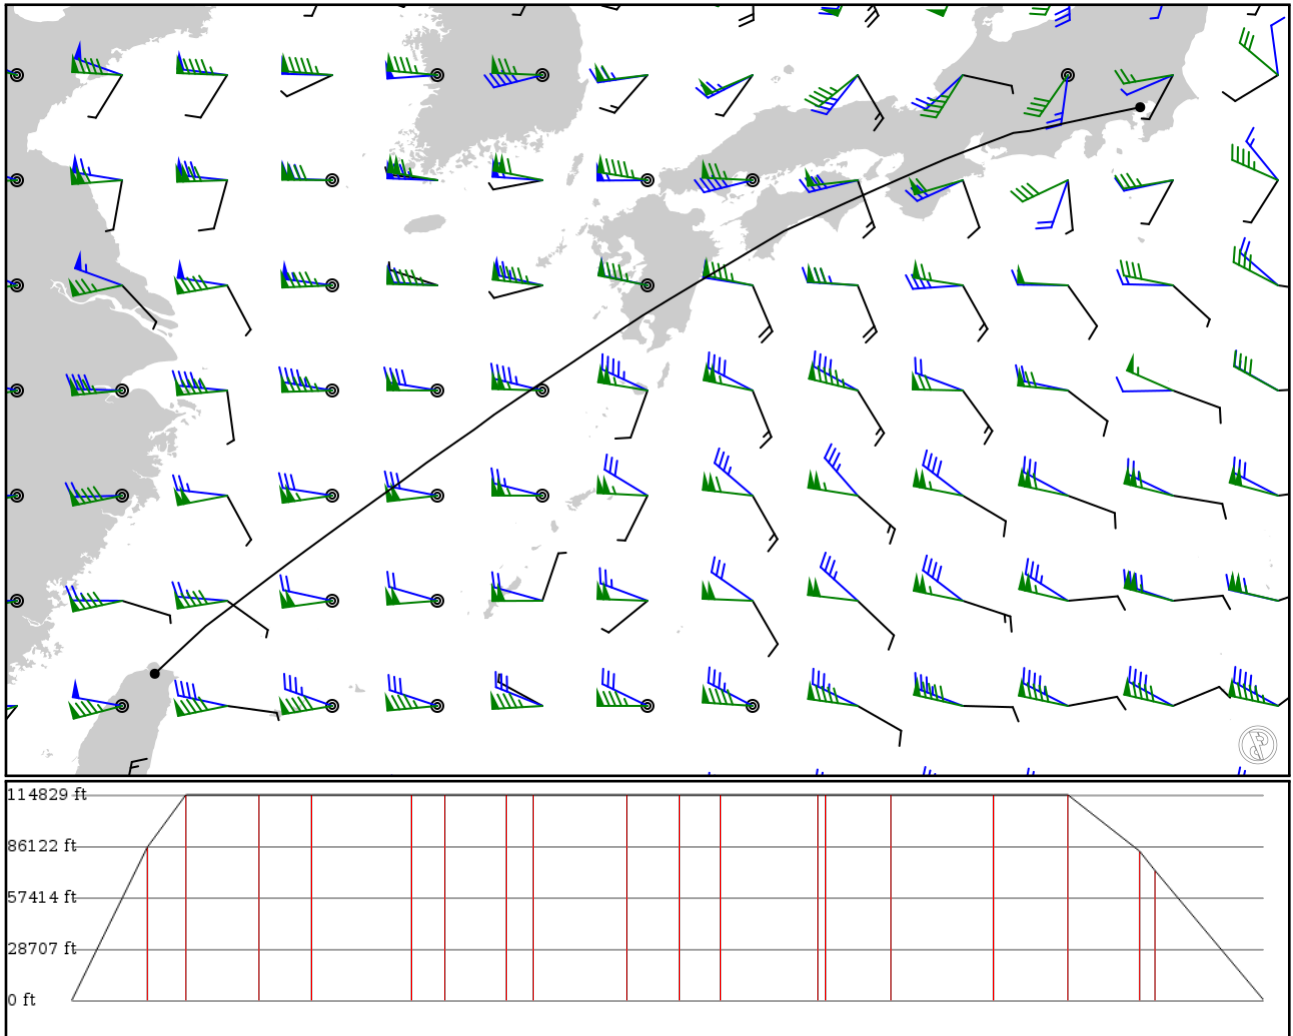

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RCSS	-	25.06960	0 ft	-	Songshan
APT	-	121.55300	0 m		
AISAR	-	25.94750	26,100 ft	73	-
FIX	-	122.49300	7,955 m		
OSTAR	A1	26.33170	35,000 ft	35	-
FIX	AWY-HI	123.00000	10,668 m		
BULAN	A1	27.09170	35,000 ft	70	-
FIX	AWY-HI	124.00000	10,668 m		
IGMON	A1	27.62210	35,000 ft	49	-
FIX	AWY-HI	124.72100	10,668 m		
SAPET	A1	28.63710	35,000 ft	96	-
FIX	AWY-HI	126.13100	10,668 m		
URUMA	A1	28.97010	35,000 ft	30	-
FIX	AWY-HI	126.57900	10,668 m		
AKVAS	A1	29.58700	35,000 ft	59	-
FIX	AWY-HI	127.46500	10,668 m		
RUSAR	A1	29.86500	35,000 ft	25	-
FIX	AWY-HI	127.83700	10,668 m		
JEDAI	A1	30.77460	35,000 ft	89	-
FIX	AWY-HI	129.20100	10,668 m		
KOSHI	A1	31.28850	35,000 ft	49	-
FIX	AWY-HI	129.96500	10,668 m		
HKC	Y50	31.69720	35,000 ft	40	KAGOSHIMA
VOR	AWY-HI	130.58300	10,668 m		
LEONA	Y50	32.59280	35,000 ft	93	-
FIX	AWY-HI	132.07700	10,668 m		
DONKY	Y50	32.65650	35,000 ft	6	-
FIX	AWY-HI	132.18500	10,668 m		
SUKMO	Y50	33.25560	35,000 ft	62	-
FIX	AWY-HI	133.19600	10,668 m		
BALSA	Y50	34.03650	35,000 ft	97	-
FIX	AWY-HI	134.91500	10,668 m		
LABEL	Y50	34.58780	35,000 ft	70	-
FIX	AWY-HI	136.18100	10,668 m		
DARTS	Y50	35.07260	25,400 ft	68	-
FIX	AWY-HI	137.44200	7,742 m		
BUPPO	Y50	35.10950	22,100 ft	15	-
FIX	AWY-HI	137.74400	6,736 m		
RJTT	-	35.54790	0 ft	103	Tokyo Intl
APT	-	139.78900	0 m		

RCSS

Region: REPUBLIC OF CHINA (TAIWAN)
Timezone: ASIA/TAIPEI
Runways: 1

Elevation: 18 ft / 5 m
Location: 25.069600 121.553000
Magnetic Var: 5.029 W

METAR

RCSS 070130Z 07013KT 9999 FEW022 BKN220 28/20 Q1015 NOSIG RMK A2998

TAF

TAF RCSS 062300Z 0700/0724 09010KT 9999 FEW012 BKN032 TEMPO 0703/0709 08017KT

Frequencies

REC - 127.40 MHz - ATIS	REC - 431.00 MHz - ATIS
CLD - 121.20 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - SONGSHAN GROUND
TWR - 118.10 MHz - SONGSHAN TOWER	APP - 119.70 MHz - TAIPEI APPROACH
APP - 119.60 MHz - TAIPEI APPROACH	APP - 123.50 MHz - TAIPEI APPROACH
APP - 130.10 MHz - TAIPEI APPROACH	APP - 129.60 MHz - TAIPEI APPROACH
APP - 125.10 MHz - TAIPEI APPROACH	APP - 128.50 MHz - TAIPEI APPROACH
APP - 124.20 MHz - TAIPEI APPROACH	APP - 120.40 MHz - TAIPEI APPROACH
APP - 125.60 MHz - TAIPEI APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	197 ft	8,555 ft	92.21	ASPHALT	0 ft	197 ft
	60 m	2,607 m	97.24		0 m	60 m
28	197 ft	8,555 ft	272.22	ASPHALT	0 ft	764 ft
	60 m	2,607 m	277.25		0 m	233 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	ITSG	108.90 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
28	DME	ITLU	108.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
10	LOC-ILS	ITSG	108.90 MHz	18 nm	92.22	-	18 ft
				33 km	97.25		18 m
10	GS	ITSG	108.90 MHz	10 nm	92.22	3.00	18 ft
				19 km	97.25		18 m

RJTT

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 4

Elevation: 20 ft / 6 m
Location: 35.547900 139.789000
Magnetic Var: 7.805 W

METAR

RJTT 070130Z 20013KT 9999 -SHRA FEW015 SCT025 BKN090 21/18 Q1010 TEMPO 20020G30KT RMK 1CU015 3CU025 7AC090 A2985

TAF

TAF RJTT 062306Z 0700/0806 19024KT 8000 -SHRA FEW008 BKN015 TEMPO 0701/0710 19026G36KT TEMPO 0710/0715 FEW005 BKN

Frequencies

REC - 128.80 MHz - TOKYO ATIS	CLD - 121.87 MHz - TOKYO DELIVERY
CLD - 121.82 MHz - TOKYO DELIVERY	GND - 118.22 MHz - TOKYO GROUND
GND - 121.62 MHz - TOKYO GROUND	GND - 121.70 MHz - TOKYO GROUND
GND - 121.97 MHz - TOKYO GROUND	GND - 122.07 MHz - TOKYO GROUND
TWR - 118.10 MHz - TOKYO TOWER	TWR - 118.57 MHz - TOKYO TOWER
TWR - 118.72 MHz - TOKYO TOWER	TWR - 124.35 MHz - TOKYO TOWER
TWR - 118.80 MHz - TOKYO TOWER	TWR - 116.20 MHz - TOKYO TOWER
APP - 119.10 MHz - TOKYO APPROACH	APP - 119.40 MHz - TOKYO APPROACH
APP - 119.65 MHz - TOKYO APPROACH	APP - 119.70 MHz - TOKYO APPROACH
APP - 125.40 MHz - TOKYO APPROACH	APP - 121.27 MHz - TOKYO APPROACH
APP - 124.40 MHz - TOKYO APPROACH	APP - 125.20 MHz - TOKYO APPROACH
APP - 125.80 MHz - TOKYO APPROACH	APP - 127.70 MHz - TOKYO APPROACH
DEP - 126.00 MHz - TOKYO DEPARTURE	DEP - 120.80 MHz - TOKYO DEPARTURE
DEP - 127.50 MHz - TOKYO DEPARTURE	DEP - 127.60 MHz - TOKYO DEPARTURE
DEP - 124.20 MHz - TOKYO DEPARTURE	DEP - 119.60 MHz - TOKYO DEPARTURE
DEP - 120.60 MHz - TOKYO DEPARTURE	DEP - 125.52 MHz - TOKYO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	197 ft	11,039 ft	150.01	ASPHALT	0 ft	190 ft
	60 m	3,365 m	157.81		0 m	58 m
34R	197 ft	11,039 ft	330.02	ASPHALT	1,181 ft	194 ft
	60 m	3,365 m	337.82		360 m	59 m
04	197 ft	8,211 ft	34.92	ASPHALT	0 ft	194 ft
	60 m	2,503 m	42.73		0 m	59 m
22	197 ft	8,211 ft	214.93	ASPHALT	0 ft	190 ft
	60 m	2,503 m	222.74		0 m	58 m
16R	197 ft	9,855 ft	149.98	ASPHALT	0 ft	0 ft
	60 m	3,004 m	157.79		0 m	0 m
34L	197 ft	9,855 ft	329.99	ASPHALT	0 ft	190 ft
	60 m	3,004 m	337.80		0 m	58 m
05	197 ft	8,206 ft	42.44	ASPHALT	0 ft	190 ft
	60 m	2,501 m	50.25		0 m	58 m
23	197 ft	8,206 ft	222.45	ASPHALT	0 ft	194 ft
	60 m	2,501 m	230.26		0 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	DME	IAD	108.10 MHz	18 nm	-	-	46 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	-		46 m
23	DME	ITD	110.50 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
34L	DME	IHA	111.70 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
34R	DME	ITC	108.90 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
16L	LOC-ILS	IOC	111.95 MHz	18 nm	150.02	-	20 ft
				33 km	157.82		20 m
16R	LOC-ILS	ITA	111.55 MHz	18 nm	149.99	-	20 ft
				33 km	157.79		20 m
22	LOC-ILS	IAD	108.10 MHz	18 nm	214.93	-	20 ft
				33 km	222.73		20 m
23	LOC-ILS	ITD	110.50 MHz	18 nm	222.45	-	20 ft
				33 km	230.25		20 m
34L	LOC-ILS	IHA	111.70 MHz	18 nm	329.99	-	20 ft
				33 km	337.79		20 m
34R	LOC-ILS	ITC	108.90 MHz	18 nm	330.02	-	20 ft
				33 km	337.82		20 m
16L	GS	IOC	111.95 MHz	10 nm	150.02	3.00	20 ft
				19 km	157.82		20 m
16R	GS	ITA	111.55 MHz	10 nm	149.99	3.00	20 ft
				19 km	157.79		20 m
22	GS	IAD	108.10 MHz	10 nm	214.93	3.00	20 ft
				19 km	222.73		20 m
23	GS	ITD	110.50 MHz	10 nm	222.45	3.00	20 ft
				19 km	230.25		20 m
34L	GS	IHA	111.70 MHz	10 nm	329.99	3.00	20 ft
				19 km	337.79		20 m
34R	GS	ITC	108.90 MHz	10 nm	330.02	3.00	20 ft
				19 km	337.82		20 m