

VVTS

Tan Son Nhat Intl


RPLL

Ninoy Aquino Intl

2024/05/20 0936Z

VVTS PTH **N500** PANDI **M765** EXORA RPLL

880.81 nm / 1631.26 km

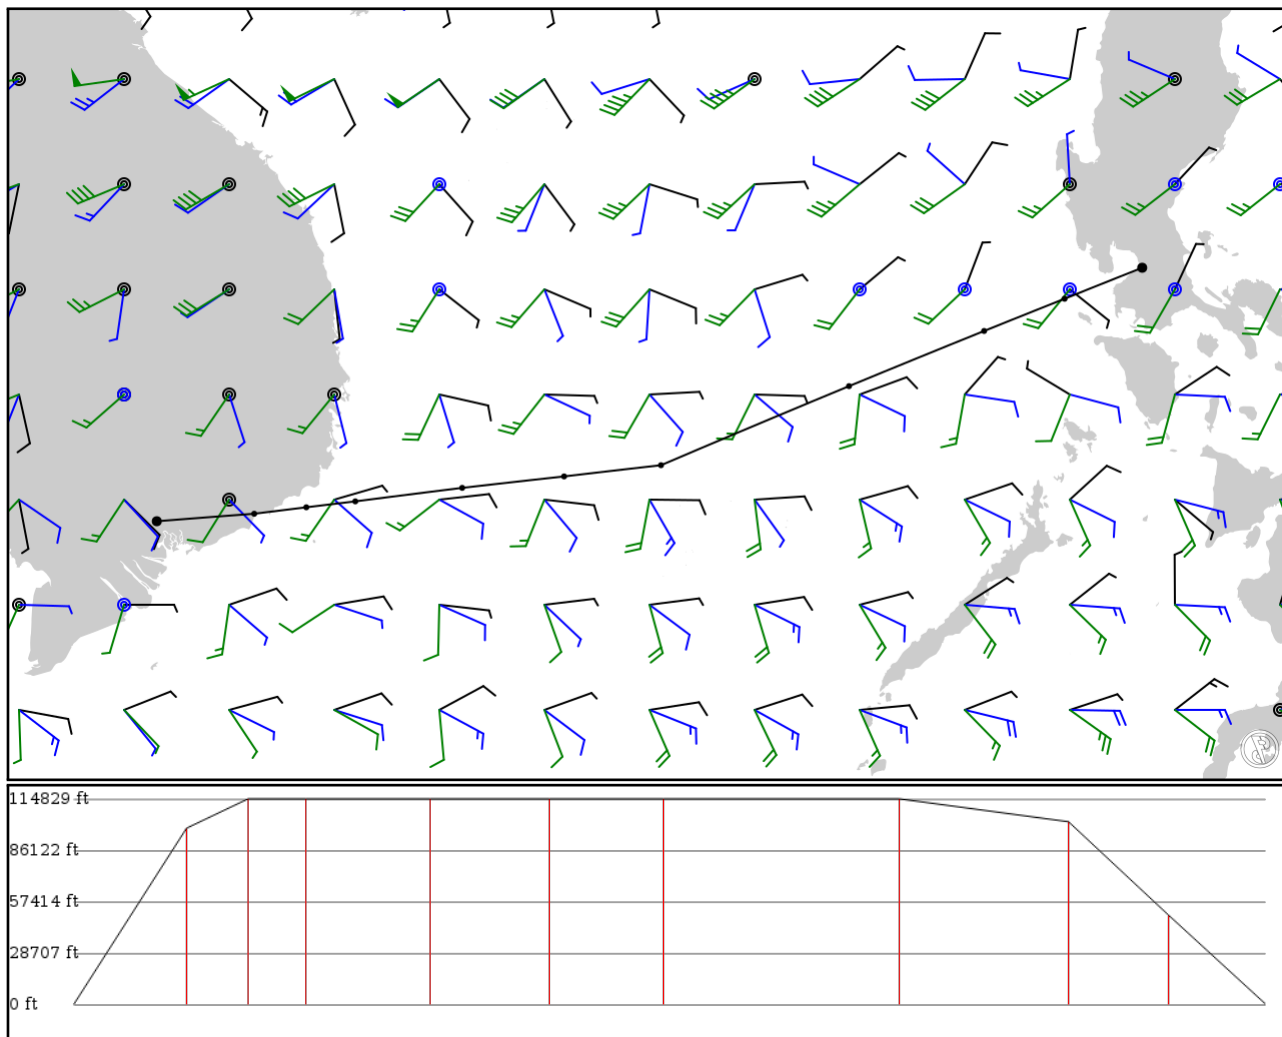

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VVTS	-	10.81870	0 ft	-	Tan Son Nhat Intl
APT	-	106.65200	0 m		
PTH	-	10.92800	30,000 ft	84	PHANTHET
VOR	-	108.07200	9,144 m		
AGSIS	N500	11.02190	35,000 ft	45	-
FIX	AWY-HI	108.83100	10,668 m		
DAMVO	N500	11.10830	35,000 ft	42	-
FIX	AWY-HI	109.54500	10,668 m		
MIMUX	N500	11.30500	35,000 ft	92	-
FIX	AWY-HI	111.10300	10,668 m		
AGSAM	N500	11.47170	35,000 ft	88	-
FIX	AWY-HI	112.58800	10,668 m		
PANDI	N500	11.63500	35,000 ft	83	-
FIX	AWY-HI	114.00000	10,668 m		
NOBEN	M765	12.78670	35,000 ft	175	-
FIX	AWY-HI	116.74000	10,668 m		
REKEL	M765	13.59040	31,100 ft	124	-
FIX	AWY-HI	118.70900	9,479 m		
EXORA	M765	14.05970	15,200 ft	73	-
FIX	AWY-HI	119.88200	4,633 m		
RPLL	-	14.51130	0 ft	71	Ninoy Aquino Intl
APT	-	121.01300	0 m		

VVTS

Region: VIETNAM
Timezone: ASIA/HO_CHI_MINH
Runways: 2

Elevation: 33 ft / 10 m
Location: 10.818700 106.652000
Magnetic Var: 0.666 W

METAR

VVTS 200900Z 27007KT 210V300 9999 VCSH SCT025 FEW030CB 36/25 Q1002 NOSIG

TAF

TAF VVTS 200500Z 2006/2112 22007KT 9999 SCT017 SCT050 TEMPO 2007/2011 22015G25KT 5000 TSRA SCT015 FEW017CB SCT050

Frequencies

REC - 128.00 MHz - TAN SON NHAT ATIS	TWR - 118.70 MHz - TAN SON NHAT TOWER
TWR - 130.00 MHz - TAN SON NHAT TOWER	GND - 121.60 MHz - TAN SON NHAT GROUND
GND - 121.75 MHz - TAN SON NHAT GROUND	GND - 121.90 MHz - TAN SON NHAT GROUND
GND - 121.97 MHz - TAN SON NHAT GROUND	CLD - 123.60 MHz -
CLD - 121.80 MHz -	TAN SON NHAT CLEARANCE DELIVERY
TAN SON NHAT CLEARANCE DELIVERY	APP - 126.35 MHz - TAN SON NHAT APPROACH
APP - 125.50 MHz - TAN SON NHAT APPROACH	GND - 125.50 MHz -
GND - 124.07 MHz -	TAN SON NHAT TERMINAL CONTROL AREA
TAN SON NHAT TERMINAL CONTROL AREA	APP - 127.72 MHz - TAN SON NHAT ARRIVAL
APP - 126.35 MHz - TAN SON NHAT ARRIVAL	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	148 ft	12,541 ft	68.98	CONCRETE	2,513 ft	853 ft
	45 m	3,822 m	69.64		766 m	260 m
25L	148 ft	12,541 ft	248.98	CONCRETE	0 ft	1,030 ft
	45 m	3,822 m	249.65		0 m	314 m
07L	148 ft	10,009 ft	68.96	CONCRETE	0 ft	1,030 ft
	45 m	3,051 m	69.63		0 m	314 m
25R	148 ft	10,009 ft	248.97	CONCRETE	0 ft	1,033 ft
	45 m	3,051 m	249.64		0 m	315 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25L	DME	SGN	108.30 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
25R	DME	HCM	110.50 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
07R	LOC-ILS	ITS	111.70 MHz	18 nm	68.98	-	33 ft
				33 km	69.65		33 m
25L	LOC-ILS	SGN	108.30 MHz	18 nm	248.98	-	33 ft
				33 km	249.65		33 m
25R	LOC-ILS	HCM	110.50 MHz	18 nm	248.97	-	33 ft
				33 km	249.64		33 m
07R	GS	ITS	111.70 MHz	10 nm	68.98	3.00	33 ft
				19 km	69.65		33 m
25L	GS	SGN	108.30 MHz	10 nm	248.98	3.00	33 ft
				19 km	249.65		33 m
25R	GS	HCM	110.50 MHz	10 nm	248.97	3.00	33 ft
				19 km	249.64		33 m

RPLL

Region: PHILIPPINES
Timezone: ASIA/MANILA
Runways: 2

Elevation: 75 ft / 23 m
Location: 14.511300 121.013000
Magnetic Var: 2.781 W

METAR

RPLL 200900Z VRB02KT 9999 FEW020CB SCT022 33/24 Q1005 NOSIG RMK A2968 CB S

TAF

TAF RPLL 200500Z 2006/2112 12006KT 9999 FEW025 TX35/2006Z TN28/2021Z TEMPO 2012/2018 VRB06KT -TSRA SCT023CB BKN090

Frequencies

REC - 126.40 MHz - ATIS	APP - 119.70 MHz - MANILA APPROACH
APP - 121.10 MHz - MANILA APPROACH	APP - 127.70 MHz - MANILA APPROACH
TWR - 118.10 MHz - MANILA TOWER	GND - 121.80 MHz - MANILA GROUND
GND - 121.70 MHz - MANILA RAMP	GND - 128.80 MHz - MANILA RAMP
GND - 123.25 MHz - MANILA RAMP	GND - 121.35 MHz - MANILA RAMP
CLD - 125.10 MHz - MANILA CLEARANCE DELIVERY	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	197 ft	11,742 ft	60.15	ASPHALT	545 ft	0 ft
	60 m	3,579 m	62.93		166 m	0 m
24	197 ft	11,742 ft	240.15	ASPHALT	0 ft	0 ft
	60 m	3,579 m	242.94		0 m	0 m
13	144 ft	7,729 ft	134.96	ASPHALT	804 ft	0 ft
	44 m	2,356 m	137.74		245 m	0 m
31	144 ft	7,729 ft	314.96	ASPHALT	0 ft	0 ft
	44 m	2,356 m	317.74		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	IML	109.10 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
24	DME	IMA	109.90 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
06	LOC-ILS	IML	109.10 MHz	18 nm	60.15	-	75 ft
				33 km	62.93		75 m
24	LOC-ILS	IMA	109.90 MHz	18 nm	240.15	-	75 ft
				33 km	242.93		75 m
06	GS	IML	109.10 MHz	10 nm	60.15	3.01	75 ft
				19 km	62.93		75 m
24	GS	IMA	109.90 MHz	10 nm	240.15	3.06	75 ft
				19 km	242.93		75 m