

SKRG

Jose Maria Cordova Intl


SKBO

El Dorado Intl

2024/05/06 0658Z

SKRG BOG SKBO

116.59 nm / 215.93 km

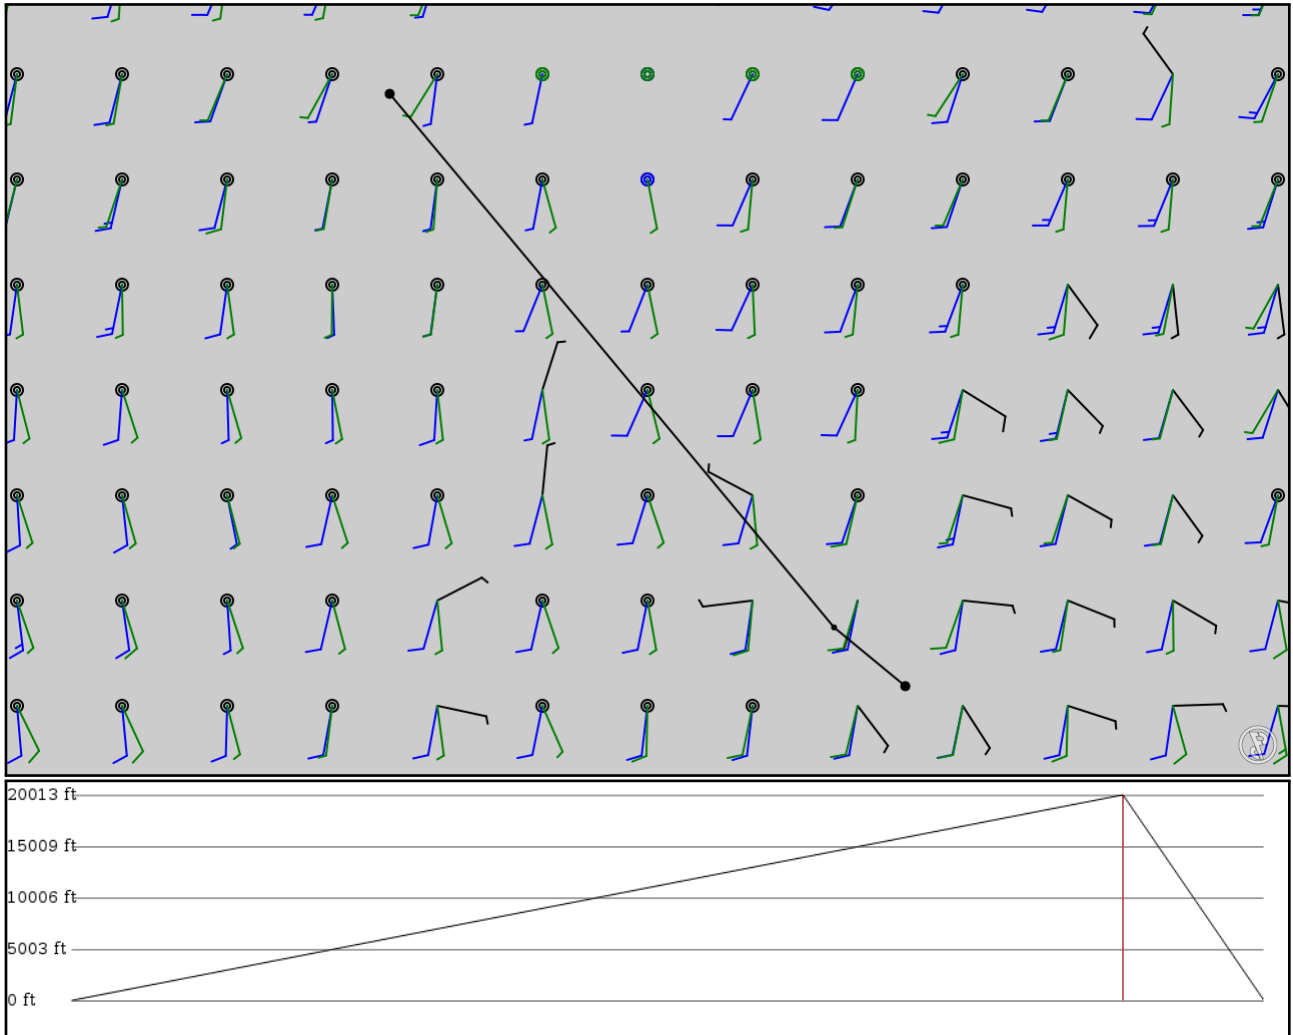

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 280kts
- Cruise Altitude: 35000ft
- Cruise Speed: 200kts
- Descent Rate: 1500ft/min
- Descent Speed: 290kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SKRG	-	6.16490	0 ft	-	Jose Maria Cordova Intl
APT	-	-75.42310	0 m		
BOG	-	4.84667	6,100 ft	102	BOGOTA
VOR	-	-74.32330	1,859 m		
SKBO	-	4.70160	0 ft	13	El Dorado Intl
APT	-	-74.14700	0 m		

SKRG

Region: COLOMBIA
Timezone: AMERICA/BOGOTA
Runways: 1

Elevation: 7,027 ft / 2,142 m
Location: 6.164900 -75.423100
Magnetic Var: 7.546 W

METAR

SKRG 060600Z VRB02KT 9999 BKN010 16/16 Q1026 NOSIG

TAF

TAF SKRG 060430Z 0606/0706 VRB02KT 9999 BKN010 TEMPO 0608/0612 4000 DZ BCFG BKN005 BECMG 0613/0615 12010KT SCT015

Frequencies

REC - 115.10 MHz - ATIS
TWR - 118.60 MHz - RIONEGRO TOWER
APP - 121.10 MHz - MEDELLIN APPROACH
GND - 121.90 MHz - RIONEGRO GROUND
APP - 126.10 MHz - MEDELLIN APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	151 ft	11,297 ft	359.63	ASPHALT	0 ft	0 ft
	46 m	3,443 m	7.18		0 m	0 m
19	151 ft	11,297 ft	179.63	ASPHALT	0 ft	112 ft
	46 m	3,443 m	187.18		0 m	34 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	LOC-ILS	IMDE	110.90 MHz	18 nm	359.63	-	7,027 ft
				33 km	7.18		7,027 m
01	GS	IMDE	110.90 MHz	10 nm	359.63	3.00	7,027 ft
				19 km	7.18		7,027 m

SKBO

Region: COLOMBIA
Timezone: AMERICA/BOGOTA
Runways: 2

Elevation: 8,358 ft / 2,548 m
Location: 4.701600 -74.147000
Magnetic Var: 8.191 W

METAR

SKBO 060600Z 03004KT 9999 -DZ FEW017 BKN070 13/13 Q1028 NOSIG

TAF

TAF TAF SKBO 060430Z 0606/0706 VRB02KT 9999 SCT020 BKN07 TEMPO 0606/0609 DZRA BKN017 TEMPO 0621/0624 DZRA SCT017T

Frequencies

REC - 127.80 MHz - ATIS	TWR - 118.10 MHz - EL DORADO TOWER
TWR - 118.25 MHz - EL DORADO TOWER	GND - 121.80 MHz - EL DORADO GROUND
GND - 122.75 MHz - EL DORADO GROUND	APP - 121.30 MHz - BOGOTA APPROACH
APP - 119.50 MHz - BOGOTA APPROACH	APP - 119.65 MHz - BOGOTA APPROACH
APP - 119.95 MHz - BOGOTA APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	151 ft	12,479 ft	127.23	ASPHALT	0 ft	203 ft
	46 m	3,804 m	135.42		0 m	62 m
31L	151 ft	12,479 ft	307.24	ASPHALT	0 ft	203 ft
	46 m	3,804 m	315.43		0 m	62 m
13L	151 ft	12,479 ft	127.24	ASPHALT	0 ft	98 ft
	46 m	3,804 m	135.43		0 m	30 m
31R	151 ft	12,479 ft	307.24	ASPHALT	0 ft	98 ft
	46 m	3,804 m	315.43		0 m	30 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13L	DME	IEDR	111.30 MHz	18 nm	-	-	8,361 ft
				33 km	-		8,361 m
13R	DME	IADO	110.70 MHz	18 nm	-	-	8,361 ft
				33 km	-		8,361 m
13L	LOC-ILS	IEDR	111.30 MHz	18 nm	127.24	-	8,358 ft
				33 km	135.43		8,358 m
13R	LOC-ILS	IADO	110.70 MHz	18 nm	127.24	-	8,358 ft
				33 km	135.43		8,358 m
13L	GS	IEDR	111.30 MHz	10 nm	127.24	3.00	8,358 ft
				19 km	135.43		8,358 m
13R	GS	IADO	110.70 MHz	10 nm	127.24	3.00	8,358 ft
				19 km	135.43		8,358 m