


2024/05/05 2218Z

EFHK HK864 EXEVO VAVIS HK418 EFHF

16.13 nm / 29.87 km

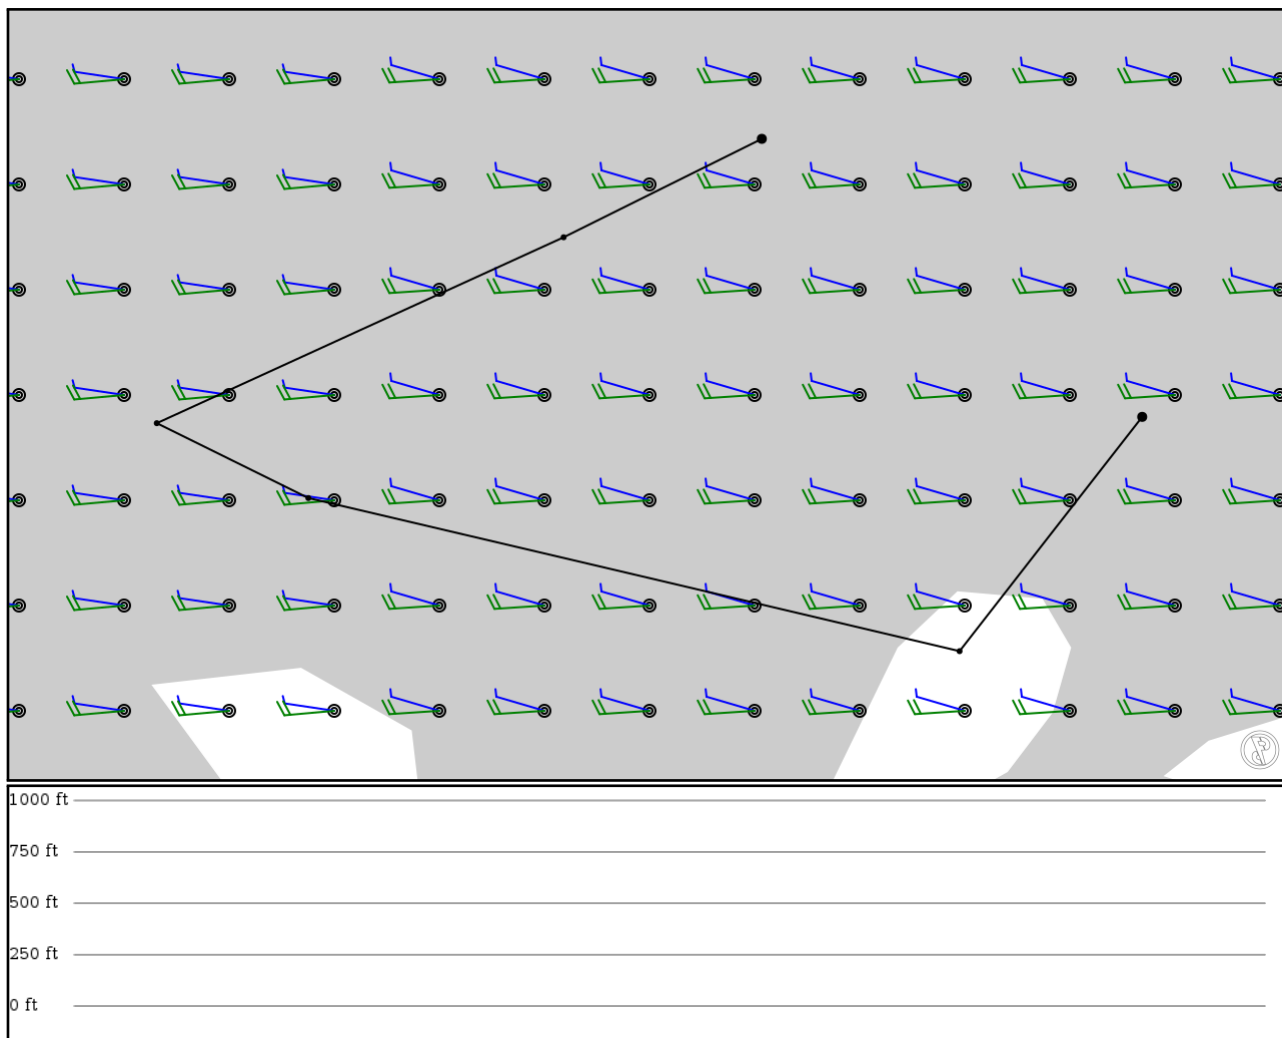

Notes

Requested: EFHK HK864 EXEVO VAVIS HK418 EFHF

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EFHK	-	60.32040	0 ft	-	Helsinki Vantaa Intl
APT	-	24.95220	0 m	-	
HK864	-	60.29700	0 ft	1	-
FIX	-	24.90500	0 m	-	
EXEVO	-	60.25280	0 ft	3	-
FIX	-	24.80810	0 m	-	
VAVIS	-	60.23500	0 ft	1	-
FIX	-	24.84420	0 m	-	
HK418	-	60.19860	0 ft	5	-
FIX	-	24.99930	0 m	-	
EFHF	-	60.25430	0 ft	3	Helsinki Malmi
APT	-	25.04280	0 m	-	

EFHK

Region: FINLAND
Timezone: EUROPE/HELSINKI
Runways: 3

Elevation: 180 ft / 55 m
Location: 60.320400 24.952200
Magnetic Var: 9.959 E

METAR

EFHK 052150Z 04006KT 010V120 CAVOK 03/00 Q1012 NOSIG

TAF

TAF TAF EFHK 052025Z 0521/0621 10004KT CAVOK

Frequencies

REC - 135.07 MHz - ATIS ARRIVAL	REC - 114.20 MHz - ATIS DEPARTURE
TWR - 119.70 MHz - HELSINKI TOWER	TWR - 118.85 MHz - HELSINKI TOWER
TWR - 118.60 MHz - HELSINKI TOWER	GND - 121.80 MHz - HELSINKI GROUND
GND - 118.12 MHz - HELSINKI GROUND	GND - 121.65 MHz - HELSINKI RAMP/TAXI
APP - 119.10 MHz - HELSINKI RADAR APPROACH	APP - 129.85 MHz - HELSINKI RADAR APPROACH
APP - 119.70 MHz - HELSINKI RADAR APPROACH	APP - 124.32 MHz - HELSINKI ARRIVAL
APP - 119.90 MHz - HELSINKI ARRIVAL	GND - 127.02 MHz - HELSINKI DE-ICING

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.52		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.56		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.46		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.50		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.11		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.13		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.49		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.55		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.12		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.55		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.49		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.49		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.55		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.12		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.55		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.49		180 m