

SABE

Aeroparque Jorge Newbery


SUMU

Carrasco/Cesareo L. Berisso Intl

2024/06/05 1919Z

SABE TOKAM SUMU

119.06 nm / 220.50 km

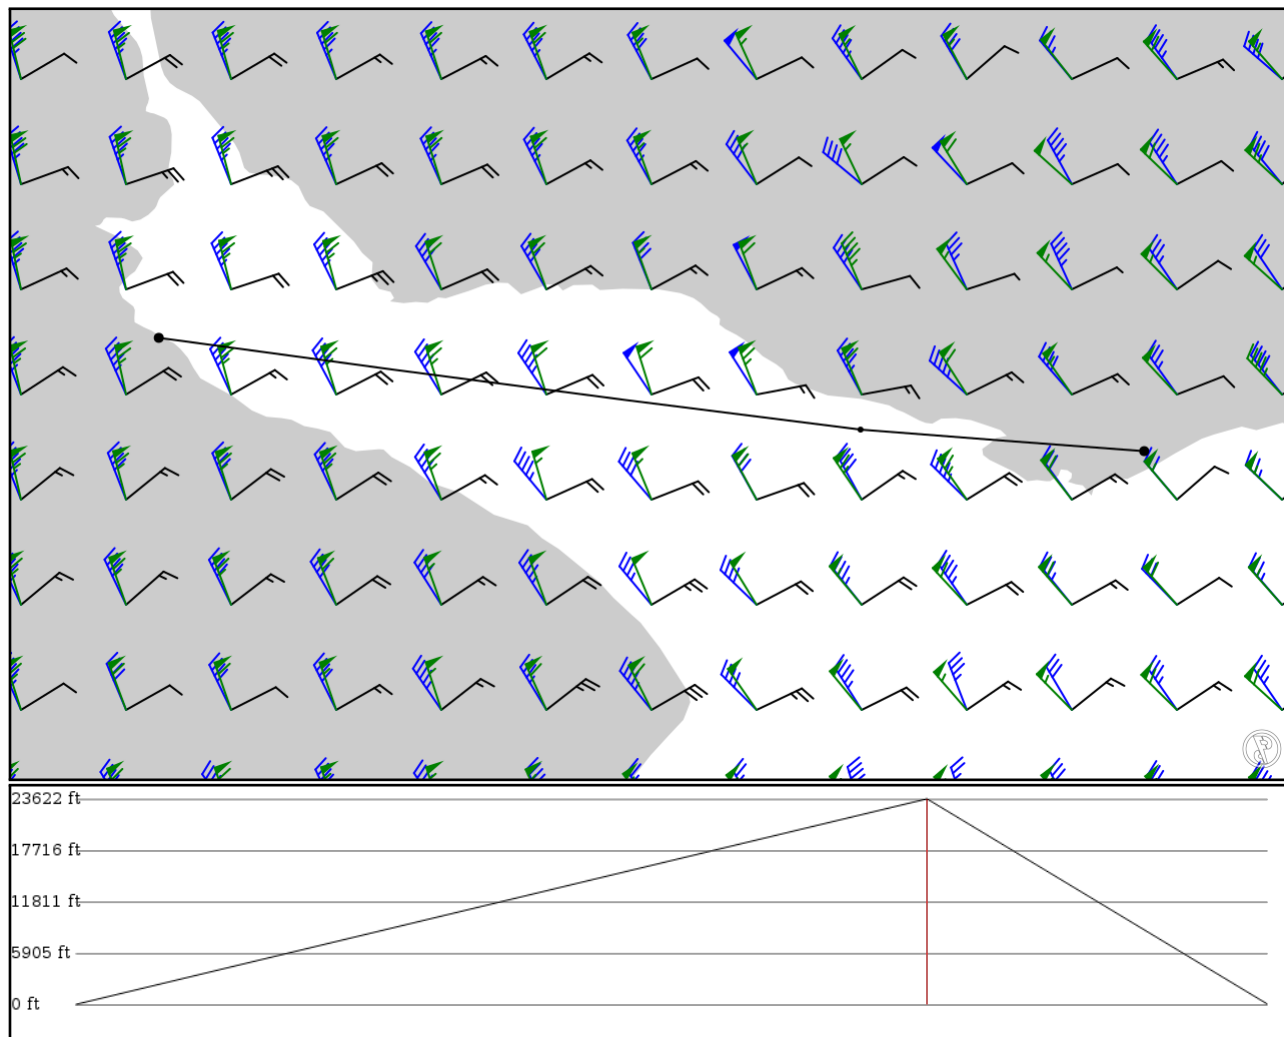

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
SABE	-	-34.55920	0 ft	-	Aeroparque	Jorge Newbery
APT	-	-58.41570	0 m			
TOKAM	-	-34.78140	7,200 ft	85	-	
FIX	-	-56.71560	2,195 m			
SUMU	-	-34.83360	0 ft	34	Carrasco/Cesareo	L. Berisso Intl
APT	-	-56.02840	0 m			

SABE

Region: ARGENTINA
Timezone: UNKNOWN
Runways: 1

Elevation: 18 ft / 5 m
Location: -34.559200 -58.415700
Magnetic Var: 10.086 W

METAR

SABE 051900Z 11008KT 9999 OVC035 14/12 Q1015 NOSIG

TAF

TAF SABE 051700Z 0518/0618 09010KT 9999 FEW010 OVC060 TX18/0618Z TN13/0610Z BECMG 0601/0603 36005KT SCT015 BKN050

Frequencies

REC - 127.60 MHz - AEROPARQUE ATIS
TWR - 118.85 MHz - AEROPARQUE TWR

GND - 121.90 MHz - AEROPARQUE GRD
APP - 120.60 MHz - AEROPARQUE APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13	131 ft	6,881 ft	124.10	CONCRETE	0 ft	791 ft
	40 m	2,097 m	134.19		0 m	241 m
31	131 ft	6,881 ft	304.09	CONCRETE	430 ft	505 ft
	40 m	2,097 m	314.17		131 m	154 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13	DME	AE	109.50 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
13	LOC-ILS	AE	109.50 MHz	18 nm	124.09	-	18 ft
				33 km	134.18		18 m
13	GS	AE	109.50 MHz	10 nm	124.09	3.00	18 ft
				19 km	134.18		18 m

SUMU

Region: URUGUAY
Timezone: AMERICA/MONTEVIDEO
Runways: 2

Elevation: 104 ft / 32 m
Location: -34.833600 -56.028400
Magnetic Var: 11.883 W

METAR

SUMU 051900Z 05006KT 9999 FEW012 BKN080 15/14 Q1016 NOSIG

TAF

TAF SUMU 051730Z 0518/0618 06007KT 9999 SCT015 BKN070 TX20/0618Z TN12/0610Z TEMPO 0605/0612 0800 FG OVC005

Frequencies

TWR - 118.10 MHz - CARRASCO TOWER
APP - 119.20 MHz - CARRASCO APPROACH
COM - 122.80 MHz - UNICOM

TWR - 121.80 MHz - CARRASCO TOWER
APP - 120.20 MHz - CARRASCO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	10,493 ft	53.43	ASPHALT	1,148 ft	194 ft
	45 m	3,198 m	65.32		350 m	59 m
24	148 ft	10,493 ft	233.42	ASPHALT	489 ft	194 ft
	45 m	3,198 m	245.30		149 m	59 m
01	148 ft	7,397 ft	359.40	ASPHALT	0 ft	194 ft
	45 m	2,255 m	11.28		0 m	59 m
19	148 ft	7,397 ft	179.40	ASPHALT	0 ft	197 ft
	45 m	2,255 m	191.28		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19	DME	IMVD	111.10 MHz	18 nm	-	-	66 ft
				33 km	-		66 m
19	LOC-ILS	IMVD	111.10 MHz	18 nm	179.40	-	104 ft
				33 km	191.28		104 m
24	LOC-ILS	ICAR	109.90 MHz	18 nm	233.42	-	104 ft
				33 km	245.30		104 m
19	GS	IMVD	111.10 MHz	10 nm	179.40	3.00	104 ft
				19 km	191.28		104 m
24	GS	ICAR	109.90 MHz	10 nm	233.42	3.00	104 ft
				19 km	245.30		104 m