

LGAV

Athens Eleftherios Venizelos


LGKR

Ioannis Kapodistrias Intl

2024/06/06 1152Z

LGAV VARDI **UL995** LATSO LGKR

214.35 nm / 396.98 km

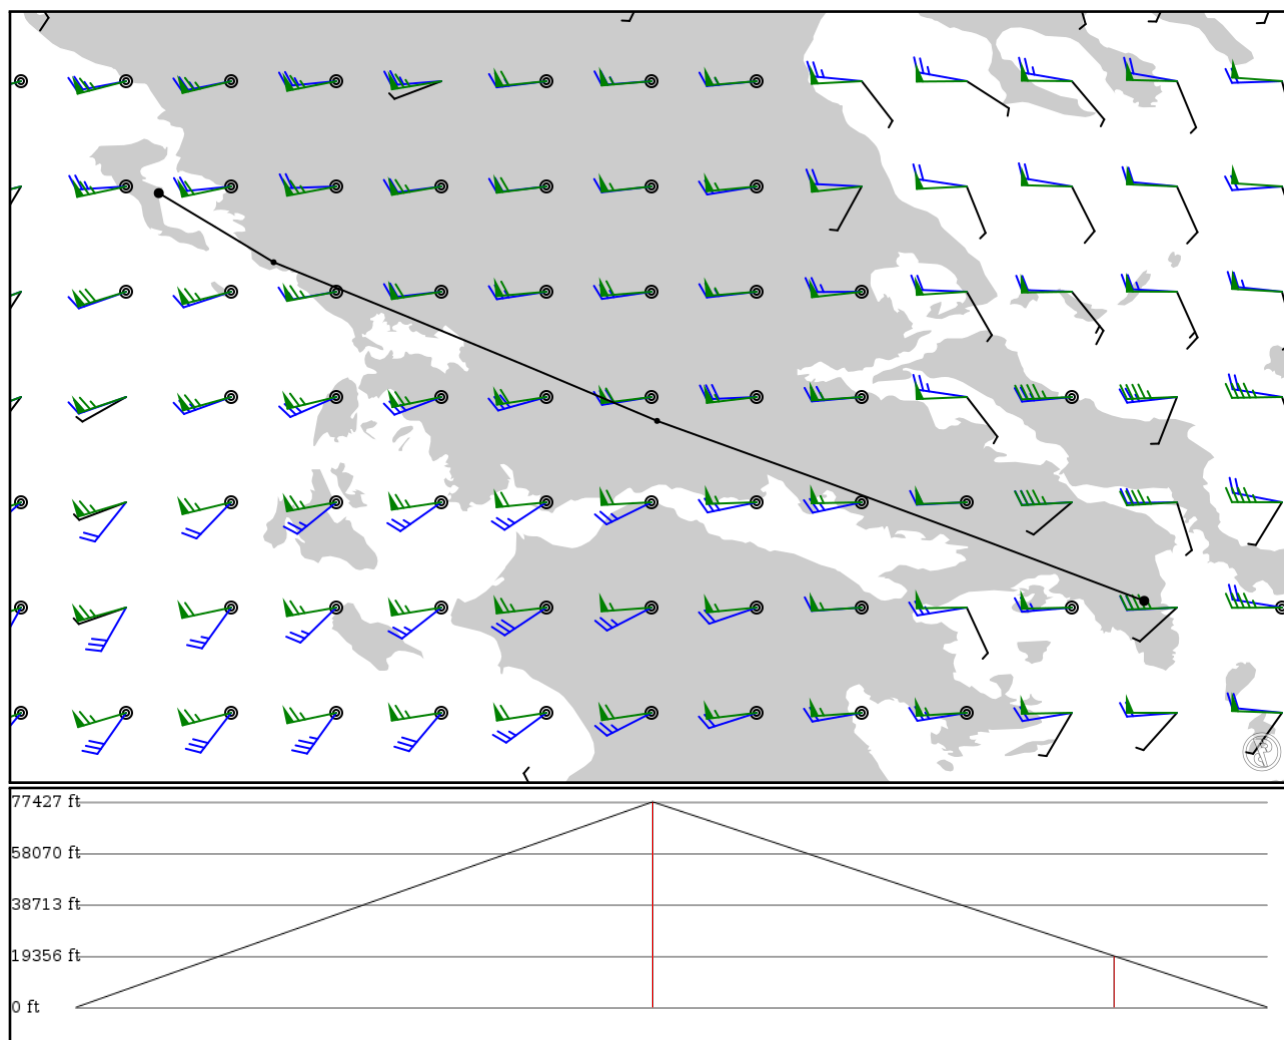

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LGAV	-	37.93670	0 ft	-	Athens Eleftherios Venizelos
APT	-	23.94450	0 m		
VARDI	-	38.67190	23,600 ft	103	-
FIX	-	21.95110	7,193 m		
LATSO	UL995	39.32000	5,900 ft	82	-
FIX	AWY-HI	20.38190	1,798 m		
LGKR	-	39.60230	0 ft	27	Ioannis Kapodistrias Intl
APT	-	19.91200	0 m		

LGAV

Region: GREECE
Timezone: EUROPE/ATHENS
Runways: 2

Elevation: 308 ft / 94 m
Location: 37.936700 23.944500
Magnetic Var: 5.114 E

METAR

LGAV 061120Z 05008KT 020V080 9999 SCT035 BKN070 30/12 Q1015 NOSIG

TAF

TAF AMD TAF AMD LGAV 061000Z 0610/0706 03010KT 9999 FEW025 SCT070 TEMPO 0610/0612 BKN070 BECMG 0619/0621 02010G200

Frequencies

REC - 136.12 MHz - ATIS	REC - 131.17 MHz - ATHENS INFORMATION
REC - 124.02 MHz - ATHENS INFORMATION	TWR - 136.27 MHz - VENIZELOS TOWER
TWR - 122.10 MHz - VENIZELOS TOWER	TWR - 118.62 MHz - VENIZELOS TOWER
GND - 121.75 MHz - VENIZELOS GROUND	GND - 121.95 MHz - VENIZELOS GROUND
GND - 121.90 MHz - VENIZELOS GROUND	GND - 121.80 MHz - VENIZELOS GROUND
CLD - 118.67 MHz - CLEARANCE DELIVERY	APP - 132.97 MHz - ATHENS APPROACH
APP - 130.25 MHz - ATHENS APPROACH	APP - 128.95 MHz - ATHENS APPROACH
APP - 126.57 MHz - ATHENS APPROACH	APP - 125.52 MHz - ATHENS APPROACH
APP - 121.40 MHz - ATHENS APPROACH	APP - 121.40 MHz - ATHENS DIRECT
APP - 118.47 MHz - ATHENS DIRECT	DEP - 118.30 MHz - ATHENS DEPARTURE
DEP - 128.95 MHz - ATHENS DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03R	151 ft	13,135 ft	36.87	ASPHALT	984 ft	394 ft
	46 m	4,004 m	31.76		300 m	120 m
21L	151 ft	13,135 ft	216.89	ASPHALT	984 ft	394 ft
	46 m	4,004 m	211.77		300 m	120 m
03L	151 ft	12,478 ft	36.86	ASPHALT	984 ft	394 ft
	46 m	3,803 m	31.74		300 m	120 m
21R	151 ft	12,478 ft	216.87	ASPHALT	984 ft	394 ft
	46 m	3,803 m	211.76		300 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	DME	IATL	110.50 MHz	18 nm	-	-	255 ft
				33 km	-		255 m
21L	DME	IEVL	111.10 MHz	18 nm	-	-	303 ft
				33 km	-		303 m
21R	DME	IEVR	110.50 MHz	18 nm	-	-	282 ft
				33 km	-		282 m
03L	LOC-ILS	IATL	110.50 MHz	18 nm	36.52	-	282 ft
				33 km	31.41		282 m
03R	LOC-ILS	IATR	111.10 MHz	18 nm	36.97	-	302 ft
				33 km	31.86		302 m
21L	LOC-ILS	IEVL	111.10 MHz	18 nm	216.52	-	271 ft
				33 km	211.40		271 m
21R	LOC-ILS	IEVR	110.50 MHz	18 nm	216.50	-	255 ft
				33 km	211.39		255 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	GS	IATL	110.50 MHz	10 nm	37.04	3.00	255 ft
				19 km	31.92		255 m
03R	GS	IATR	111.10 MHz	10 nm	37.07	3.00	271 ft
				19 km	31.95		271 m
21L	GS	IEVL	111.10 MHz	10 nm	217.07	3.00	302 ft
				19 km	211.95		302 m
21R	GS	IEVR	110.50 MHz	10 nm	217.04	3.00	282 ft
				19 km	211.92		282 m