

KSJC

Norman Y. Mineta San Jose Intl


PHOG

Kahului

2024/05/18 0110Z

KSJC HADLY BEBOP R464 SOMOH PHOG

2086.87 nm / 3864.88 km

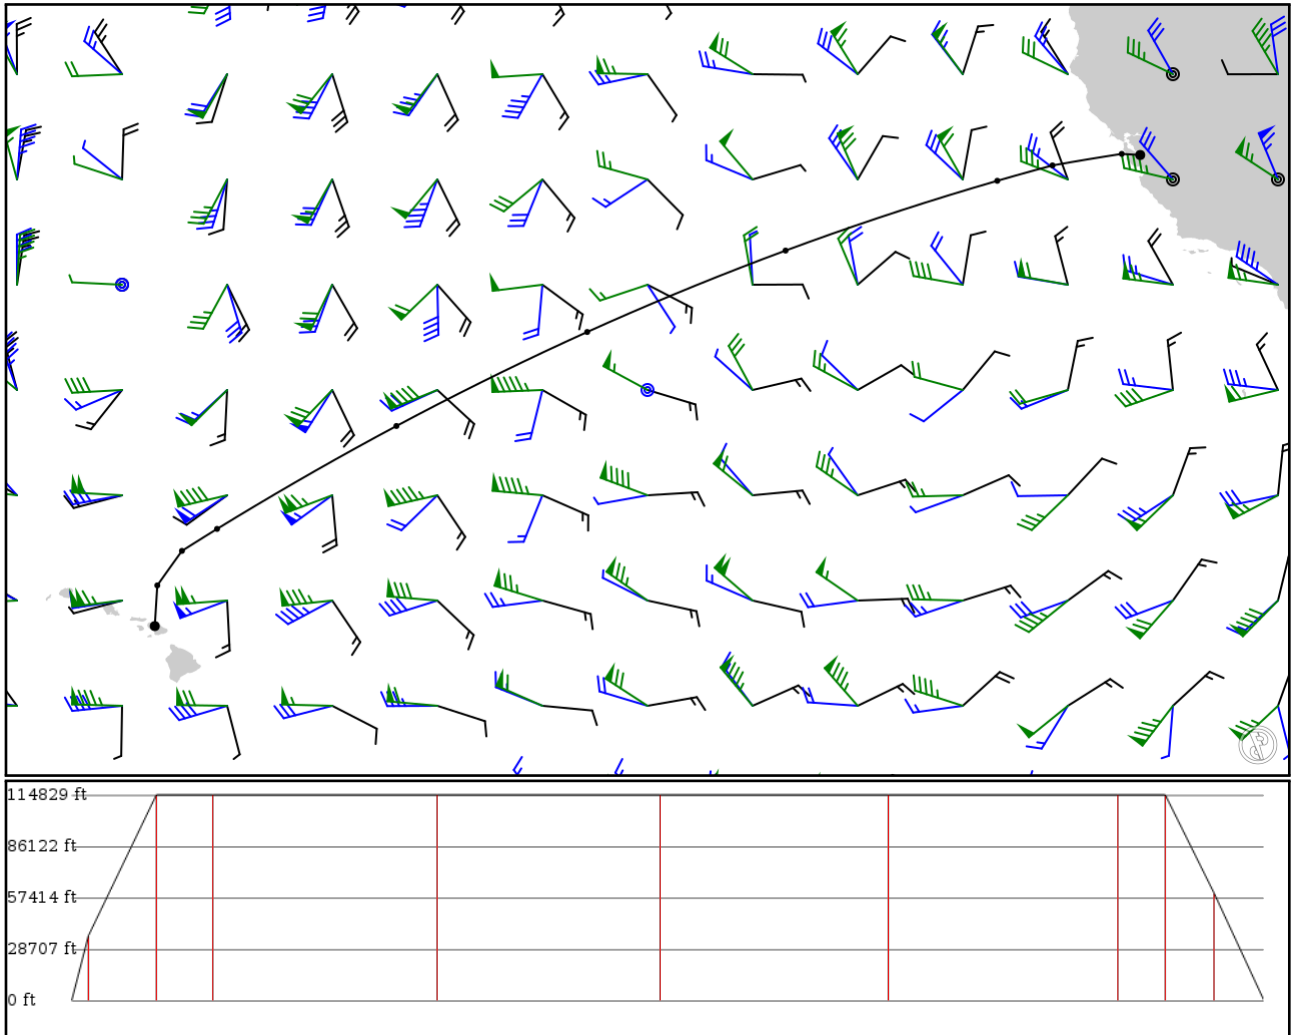

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSJC APT	- -	37.36300 -121.92900	0 ft 0 m	-	Norman Y. Mineta San Jose Intl
HADLY FIX	- -	37.40240 -122.57600	11,000 ft 3,353 m	30 -	
BEBOP FIX	- -	36.99990 -125.00100	35,000 ft 10,668 m	118 -	
BAART FIX	R464 AWY-HI	36.46190 -126.93300	35,000 ft 10,668 m	98 -	
BARAZ FIX	R464 AWY-HI	34.02310 -134.34600	35,000 ft 10,668 m	391 -	
BILLO FIX	R464 AWY-HI	31.17830 -141.29000	35,000 ft 10,668 m	390 -	
BEKME FIX	R464 AWY-HI	27.89220 -147.97000	35,000 ft 10,668 m	400 -	
BOARD FIX	R464 AWY-HI	24.29580 -154.25000	35,000 ft 10,668 m	401 -	
BITTA FIX	R464 AWY-HI	23.52800 -155.47900	35,000 ft 10,668 m	81 -	
SOMOH FIX	R464 AWY-HI	22.32150 -156.34200	18,300 ft 5,578 m	86 -	
PHOG APT	- -	20.89860 -156.43000	0 ft 0 m	85	Kahului

KSJC

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 2

Elevation: 62 ft / 19 m
Location: 37.363000 -121.929000
Magnetic Var: 12.722 E

METAR

KSJC 180053Z 32010KT 10SM FEW025 22/12 A2987 RMK A02 SLP112 T02170122

TAF

KSJC 172342Z 1800/1824 32014KT P6SM FEW025 FM180400 15005KT P6SM FEW015 FM180900 15010KT P6SM SCT014 FM182000 310

Frequencies

REC - 126.95 MHz - ATIS	COM - 124.00 MHz - CTAF
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.70 MHz - GROUND
TWR - 124.00 MHz - TOWER	APP - 120.10 MHz - NORCAL APPROACH
APP - 125.35 MHz - NORCAL APPROACH	APP - 134.50 MHz - NORCAL DEPARTURE
DEP - 121.30 MHz - NORCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	151 ft	11,012 ft	138.93	CONCRETE	1,299 ft	217 ft
	46 m	3,356 m	126.20		396 m	66 m
30L	151 ft	11,012 ft	318.94	CONCRETE	2,539 ft	49 ft
	46 m	3,356 m	306.22		774 m	15 m
12L	151 ft	11,012 ft	138.93	CONCRETE	1,309 ft	144 ft
	46 m	3,356 m	126.21		399 m	44 m
30R	151 ft	11,012 ft	318.94	CONCRETE	2,539 ft	141 ft
	46 m	3,356 m	306.22		774 m	43 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12R	DME	ISLV	110.90 MHz	18 nm	-	-	75 ft
				33 km	-		75 m
30L	DME	ISJC	110.90 MHz	18 nm	-	-	49 ft
				33 km	-		49 m
12R	LOC-ILS	ISLV	110.90 MHz	18 nm	138.94	-	62 ft
				33 km	126.22		62 m
30L	LOC-ILS	ISJC	110.90 MHz	18 nm	318.94	-	62 ft
				33 km	306.22		62 m
12R	GS	ISLV	110.90 MHz	10 nm	138.94	3.00	62 ft
				19 km	126.22		62 m
30L	GS	ISJC	110.90 MHz	10 nm	318.94	3.00	62 ft
				19 km	306.22		62 m

PHOG

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 2

Elevation: 53 ft / 16 m
Location: 20.898600 -156.430000
Magnetic Var: 9.306 E

METAR

PHOG 180054Z 36008G17KT 10SM FEW025 SCT035 31/22 A2990

TAF

TAF PHOG 172325Z 1800/1824 05014KT P6SM FEW025 SCT050 FM180600 08008KT P6SM FEW040 SCT060 FM182000 05015KT P6SM FM

Frequencies

REC - 128.60 MHz - ATIS	GND - 121.90 MHz - MAUI GROUND
TWR - 118.70 MHz - MAUI TOWER	CLD - 120.60 MHz - MAUI CLEARANCE
APP - 119.50 MHz - MAUI APPROACH	APP - 120.20 MHz - MAUI APPROACH
DEP - 119.50 MHz - MAUI DEPARTURE	DEP - 120.20 MHz - MAUI DEPARTURE
COM - 122.95 MHz - KAHULUI UNICOM	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	150 ft	7,017 ft	34.83	ASPHALT	0 ft	226 ft
	46 m	2,139 m	25.52		0 m	69 m
20	150 ft	7,017 ft	214.83	ASPHALT	0 ft	397 ft
	46 m	2,139 m	205.53		0 m	121 m
05	150 ft	4,983 ft	64.87	ASPHALT	0 ft	0 ft
	46 m	1,519 m	55.57		0 m	0 m
23	150 ft	4,983 ft	244.88	ASPHALT	0 ft	0 ft
	46 m	1,519 m	235.57		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02	DME	IOGG	110.10 MHz	18 nm	-	-	46 ft
				33 km	-		46 m
02	LOC-ILS	IOGG	110.10 MHz	18 nm	34.83	-	53 ft
				33 km	25.52		53 m
02	GS	IOGG	110.10 MHz	10 nm	34.83	3.10	53 ft
				19 km	25.52		53 m