


2024/05/04 0835Z

EPWA DIBLO T174 INDIG L980 SUBIX UL980 HLZ L980 DLE UL980 RKN UM20 PEVAD EGSS

768.33 nm / 1422.94 km

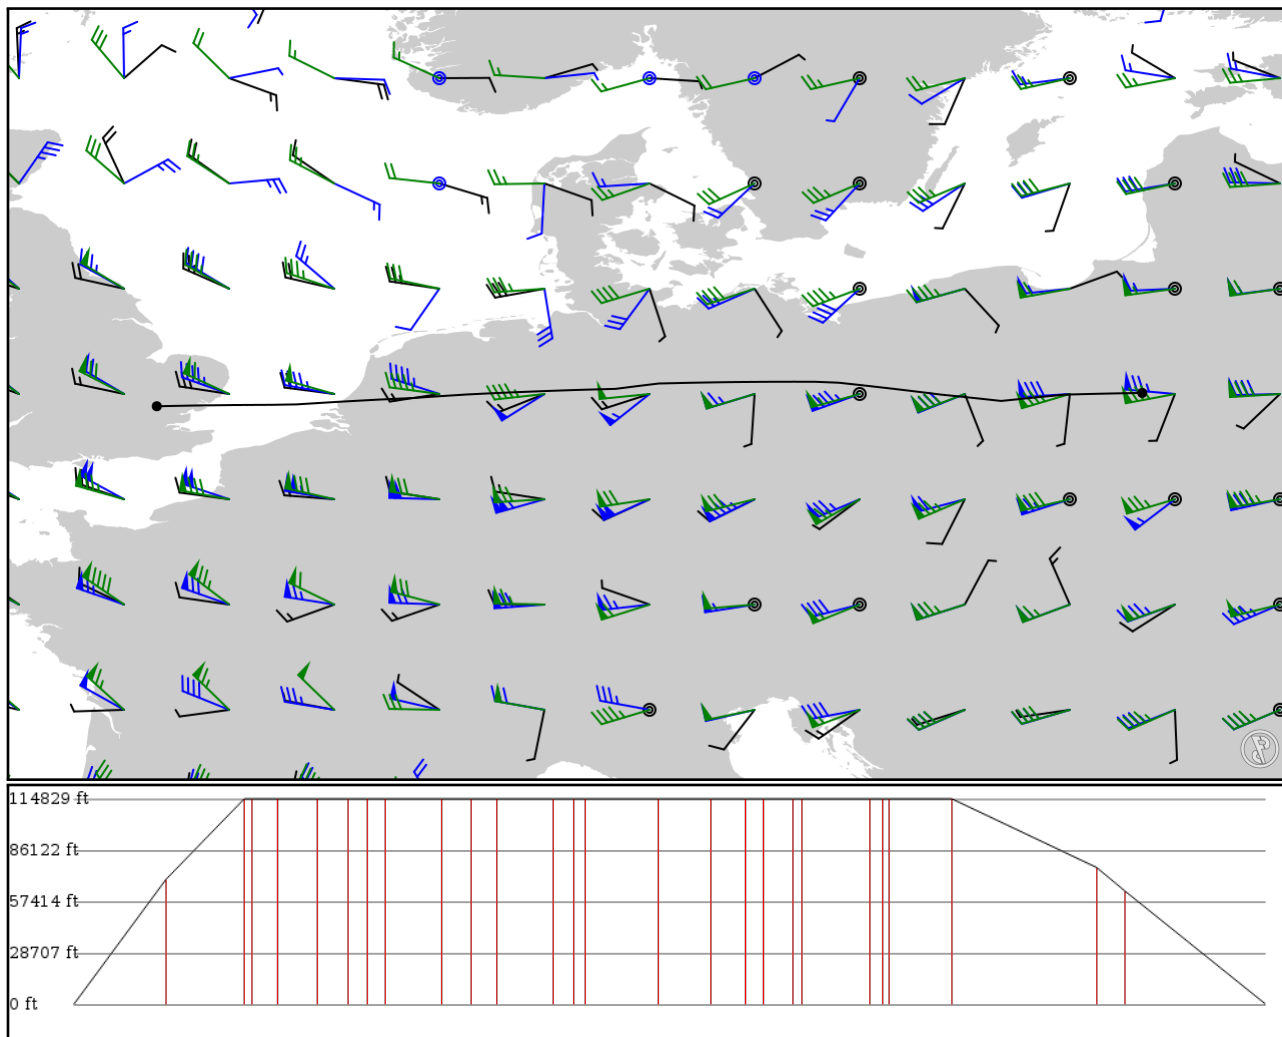

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EPWA APT	-	52.16510 20.96700	0 ft 0 m	-	Warsaw Frederic Chopin
DIBLO FIX	-	52.12970 19.34420	21,300 ft 6,492 m	59	-
INDIG FIX	T174 AWY-HI	51.99670 18.00000	35,000 ft 10,668 m	50	-
MASIV FIX	L980 AWY-HI	52.01250 17.85670	35,000 ft 10,668 m	5	-
BADUP FIX	L980 AWY-HI	52.05920 17.42110	35,000 ft 10,668 m	16	-
ADVAB FIX	L980 AWY-HI	52.13060 16.72720	35,000 ft 10,668 m	25	-
OBOLA FIX	L980 AWY-HI	52.19440 16.21140	35,000 ft 10,668 m	19	-
KELOD FIX	L980 AWY-HI	52.23390 15.88330	35,000 ft 10,668 m	12	-
BAREP FIX	L980 AWY-HI	52.27110 15.56440	35,000 ft 10,668 m	11	-
SUBIX FIX	L980 AWY-HI	52.37970 14.58560	35,000 ft 10,668 m	36	-
TUVAK FIX	UL980 AWY-HI	52.39980 14.07080	35,000 ft 10,668 m	18	-
ADLIR FIX	UL980 AWY-HI	52.40030 13.62190	35,000 ft 10,668 m	16	-
PENEK FIX	UL980 AWY-HI	52.39580 12.64670	35,000 ft 10,668 m	35	-
SOBLU FIX	UL980 AWY-HI	52.39220 12.27280	35,000 ft 10,668 m	13	-
GALKU FIX	UL980 AWY-HI	52.38940 12.07920	35,000 ft 10,668 m	7	-
HLZ VOR	UL980 AWY-HI	52.36340 10.79520	35,000 ft 10,668 m	47	HEHLINGEN
DLE VOR	L980 AWY-LO	52.25030 9.88349	35,000 ft 10,668 m	34	LEINE
ROBEG FIX	UL980 AWY-HI	52.23360 9.26962	35,000 ft 10,668 m	22	-
BADMU FIX	UL980 AWY-HI	52.22440 8.97083	35,000 ft 10,668 m	11	-
MOBSA FIX	UL980 AWY-HI	52.20640 8.44944	35,000 ft 10,668 m	19	-
OSN VOR	UL980 AWY-HI	52.20010 8.28552	35,000 ft 10,668 m	6	OSNABRUECK
AMSAN FIX	UL980 AWY-HI	52.15030 7.11139	35,000 ft 10,668 m	43	-
ETEBO FIX	UL980 AWY-HI	52.13830 6.87528	35,000 ft 10,668 m	8	-
RKN DME	UL980 AWY-HI	52.13320 6.76388	35,000 ft 10,668 m	4	REKKEN VOR-DME
RENDI FIX	UM20 AWY-HI	52.06150 5.67543	35,000 ft 10,668 m	40	-
GORLO FIX	UM20 AWY-HI	51.92410 3.17184	23,300 ft 7,102 m	92	-
PEVAD	UM20	51.91540	19,300 ft	18	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	2.66691	5,883 m		
EGSS	-	51.88510	0 ft	90	Stansted
APT	-	0.23499	0 m		

EPWA

Region: POLAND
Timezone: EUROPE/WARSAW
Runways: 2

Elevation: 362 ft / 110 m
Location: 52.165100 20.967000
Magnetic Var: 6.620 E

METAR

EPWA 040800Z 14003KT 100V190 CAVOK 21/09 Q1015 NOSIG

TAF

TAF EPWA 040830Z 0409/0509 VRB04KT CAVOK BECMG 0506/0509 21010KT

Frequencies

REC - 120.45 MHz - ATIS	TWR - 118.30 MHz - OKECIE TOWER
GND - 121.90 MHz - OKECIE GROUND	CLD - 121.60 MHz - CLEARANCE DELIVERY
APP - 128.80 MHz - WARSAW APPROACH	APP - 125.05 MHz - WARSAW APPROACH
REC - 118.77 MHz - OLSZTYN INFORMATION	REC - 119.45 MHz - WARSAW INFORMATION

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	164 ft	9,166 ft	114.57	ASPHALT	0 ft	492 ft
	50 m	2,794 m	107.95		0 m	150 m
29	164 ft	9,166 ft	294.60	ASPHALT	1,617 ft	102 ft
	50 m	2,794 m	287.98		493 m	31 m
15	197 ft	12,093 ft	151.80	ASPHALT	0 ft	144 ft
	60 m	3,686 m	145.18		0 m	44 m
33	197 ft	12,093 ft	331.82	ASPHALT	2,159 ft	148 ft
	60 m	3,686 m	325.20		658 m	45 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
11	DME	WAS	109.90 MHz	18 nm	-	-	394 ft
				33 km	-		394 m
33	DME	WA	110.30 MHz	18 nm	-	-	394 ft
				33 km	-		394 m
11	LOC-ILS	WAS	109.90 MHz	18 nm	114.59	-	362 ft
				33 km	107.97		362 m
33	LOC-ILS	WA	110.30 MHz	18 nm	331.82	-	362 ft
				33 km	325.20		362 m
11	GS	WAS	109.90 MHz	10 nm	114.59	3.00	362 ft
				19 km	107.97		362 m
33	GS	WA	110.30 MHz	10 nm	331.82	3.00	362 ft
				19 km	325.20		362 m

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.575 E

METAR

EGSS 040820Z AUTO 17007KT 130V200 9999 BKN008 11/09 Q1012

TAF

TAF EGSS 040457Z 0406/0512 20005KT 6000 OVC003 BECMG 0406/0409 9999 PROB30 TEMPO 0406/0407 0300 FG VV/// PROB30 TE

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.21		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m