

# SAWG

Rio Gallegos Airport


# SAWH

Ushuaia Intl

2024/05/22 0523Z

SAWG MUBES **UW63** LOKEN SAWH

200.72 nm / 371.73 km

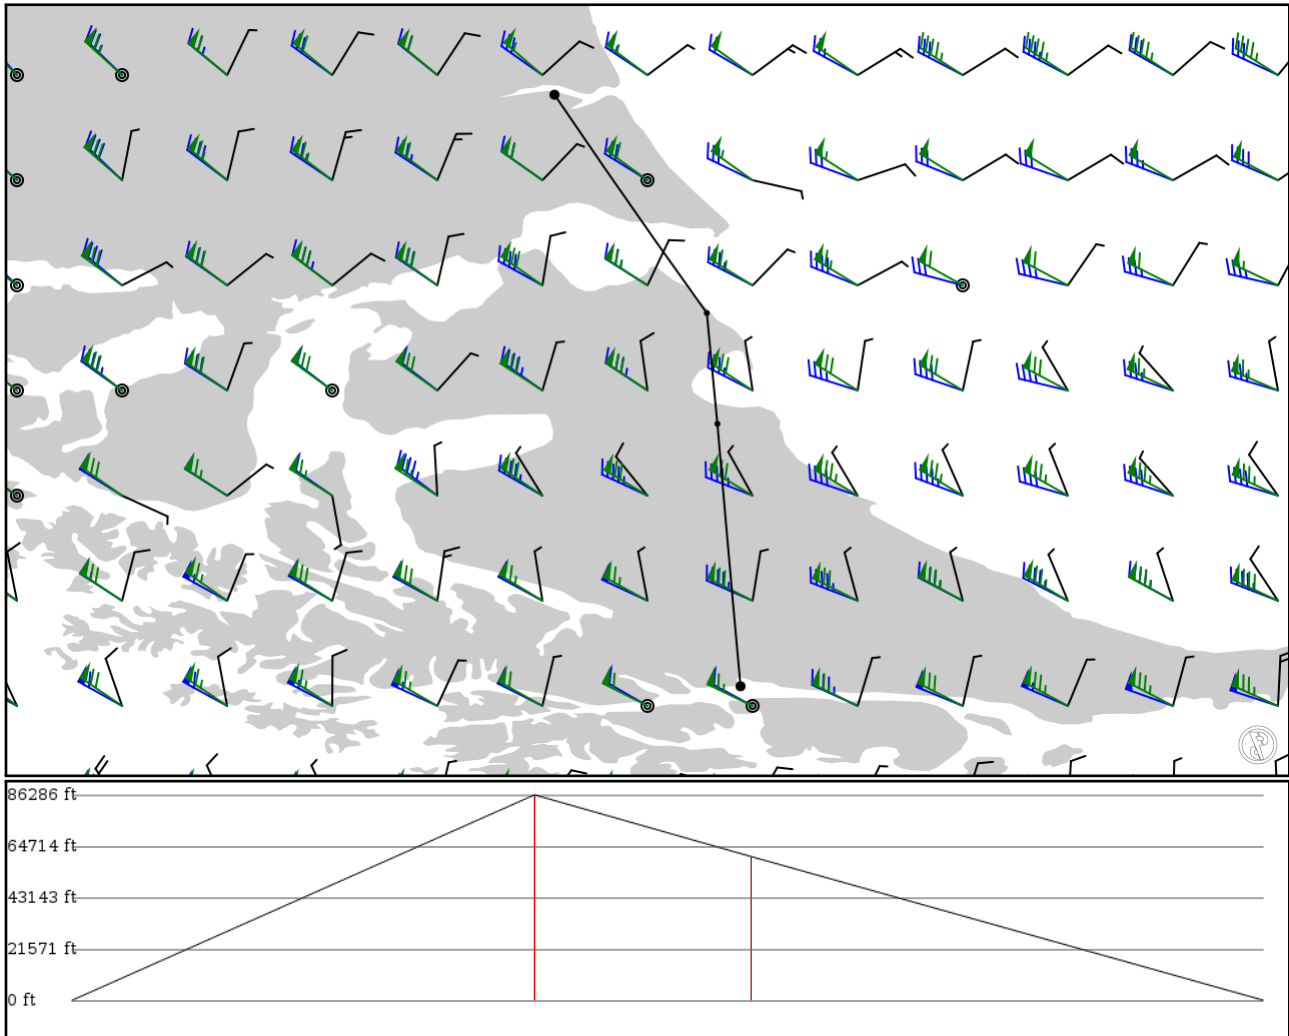

## Notes

Basic altitude profile:

- Ascent Rate: 20000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SAWG	-	-51.60880	0 ft	-	Rio Gallegos Airport
APT	-	-69.31270	0 m	-	
MUBES	-	-52.80250	26,300 ft	77	-
FIX	-	-68.47920	8,016 m	-	
LOKEN	UW63	-53.40830	18,400 ft	36	-
FIX	AWY-HI	-68.42140	5,608 m	-	
SAWH	-	-54.84330	0 ft	86	Ushuaia Intl
APT	-	-68.29480	0 m	-	

## SAWG

Region: ARGENTINA  
Timezone: AMERICA/ARGENTINA/RIO\_GALLEGOS  
Runways: 1

Elevation: 62 ft / 19 m  
Location: -51.608800 -69.312700  
Magnetic Var: 10.752 E

## METAR

SAWG 220500Z 27014KT CAVOK 05/M02 Q1002

## TAF

TAF SAWG 212300Z 2200/2224 30020G30KT CAVOK TX05/2218Z TNM01/2210Z BECMG 2204/2206 23020G30KT BECMG 2222/2224 250

## Frequencies

REC - 116.70 MHz - RIO GALLEGOS ATIS  
APP - 124.70 MHz - RIO GALLEGOS APPROACH  
TWR - 119.10 MHz - RIO GALLEGOS TOWER  
COM - 122.80 MHz - RIO GALLEGOS UNICOM

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	11,607 ft	85.60	CONCRETE	243 ft	804 ft
	45 m	3,538 m	74.85		74 m	245 m
25	148 ft	11,607 ft	265.56	CONCRETE	0 ft	656 ft
	45 m	3,538 m	254.81		0 m	200 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	GL	110.30 MHz	18 nm	-	-	61 ft
				33 km	-		61 m
25	LOC-ILS	GL	110.30 MHz	18 nm	265.58	-	62 ft
				33 km	254.83		62 m
25	GS	GL	110.30 MHz	10 nm	265.58	3.00	62 ft
				19 km	254.83		62 m

## SAWH

Region: ARGENTINA  
Timezone: AMERICA/ARGENTINA/USHUAIA  
Runways: 1

Elevation: 102 ft / 31 m  
Location: -54.843300 -68.294800  
Magnetic Var: 11.944 E

## METAR

SAWH 220500Z 25016KT 9999 FEW045 02/M00 Q0997

## TAF

TAF SAWH 212300Z 2200/2224 23015KT 3000 SN SCT015 BKN025 OVC050 TX01/2200Z TNM03/2212Z BECMG 2206/2208 9999 -SHSN

## Frequencies

REC - 127.80 MHz - USHUAIA ATIS  
APP - 118.10 MHz - USHUAIA APPROACH

TWR - 118.10 MHz - USHUAIA TOWER

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	9,534 ft	86.15	CONCRETE	591 ft	295 ft
	45 m	2,906 m	74.20		180 m	90 m
25	148 ft	9,534 ft	266.11	CONCRETE	899 ft	95 ft
	45 m	2,906 m	254.17		274 m	29 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	US	111.30 MHz	18 nm	-	-	92 ft
				33 km	-		92 m
25	LOC-ILS	US	111.30 MHz	18 nm	266.19	-	54 ft
				33 km	254.24		54 m
25	GS	US	111.30 MHz	10 nm	266.19	3.50	91 ft
				19 km	254.25		91 m