


2024/05/04 0151Z

YMHB LT **H215** ONAGI YMML

338.25 nm / 626.43 km

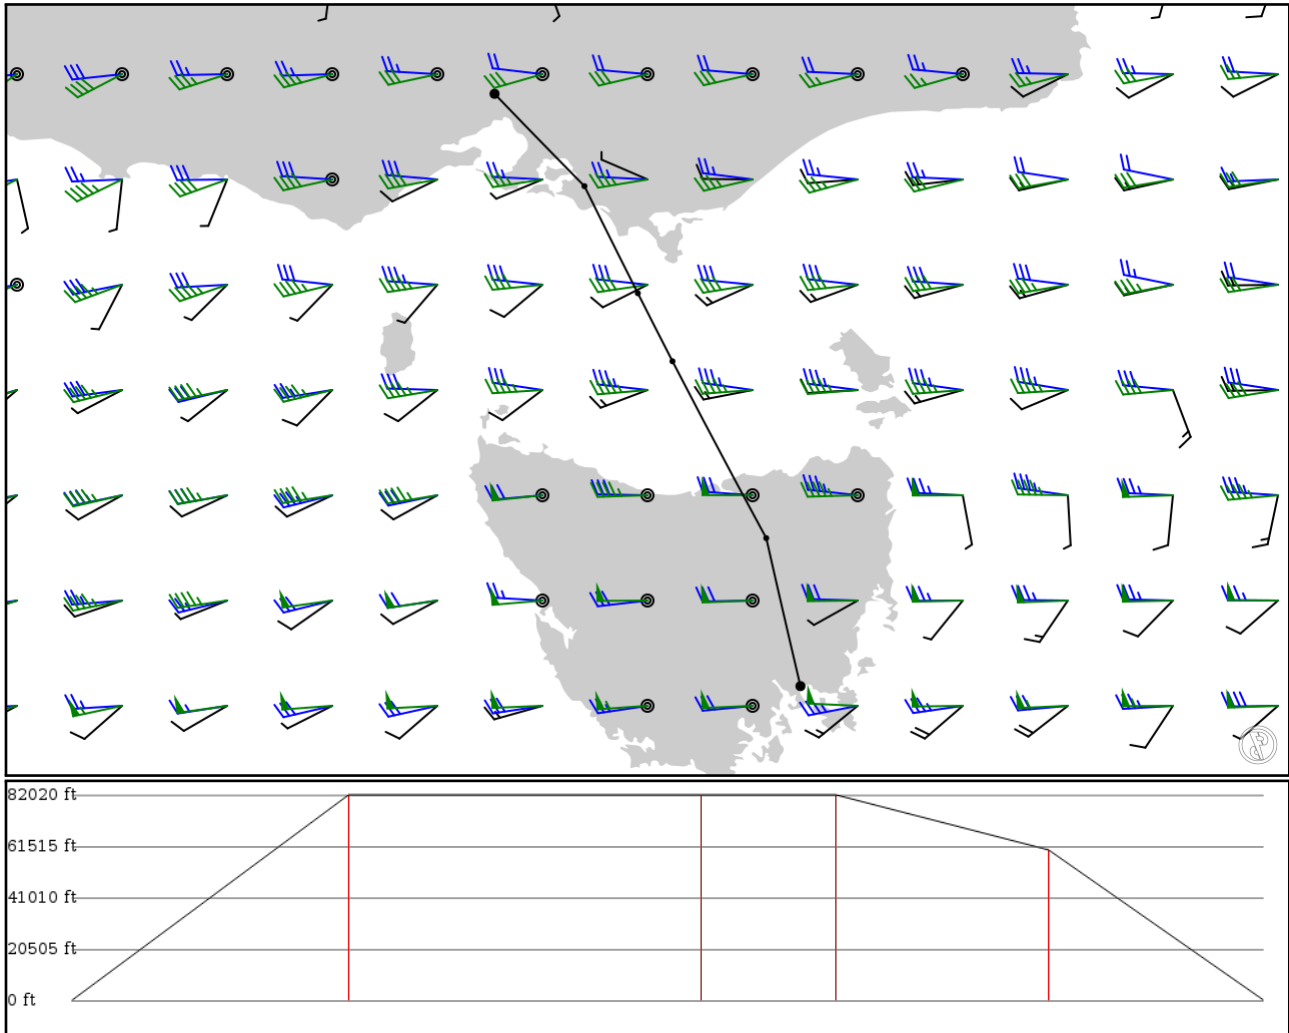

## Notes

Basic altitude profile:

- Ascent Rate: 3000ft/min
- Ascent Speed: 300kts
- Cruise Altitude: 25000ft
- Cruise Speed: 300kts
- Descent Rate: 1500ft/min
- Descent Speed: 290kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
YMHB	-	-42.83610	0 ft	-	Hobart Intl
APT	-	147.51200	0 m		
LT	-	-41.54390	25,000 ft	78	LAUNCESTON
VOR	-	147.21300	7,620 m		
FLIKI	H215	-40.00000	25,000 ft	99	-
FIX	AWY-HI	146.39300	7,620 m		
EXROM	H215	-39.40590	25,000 ft	38	-
FIX	AWY-HI	146.09000	7,620 m		
ONAGI	H215	-38.47120	18,300 ft	60	-
FIX	AWY-HI	145.62300	5,578 m		
YMML	-	-37.66550	0 ft	61	Melbourne Intl
APT	-	144.83700	0 m		

## YMHB

Region: AUSTRALIA  
Timezone: AUSTRALIA/HOBART  
Runways: 1

Elevation: 12 ft / 4 m  
Location: -42.836100 147.512000  
Magnetic Var: 15.323 E

## METAR

YMHB 040130Z 34005KT 9999 FEW017 BKN034 14/09 Q1031 RF00.0/000.0

## TAF

TAF YMHB 032307Z 0323/0500 31004KT 9999 FEW005 SCT035 FM040200 31005KT 9999 SCT035 FM040400 15007KT 9999 SCT035 FM040600 15007KT 9999 SCT035

## Frequencies

REC - 112.70 MHz - ATIS  
GND - 121.70 MHz - HOBART GROUND  
COM - 118.10 MHz - HOBART UNICOM

REC - 128.45 MHz - ATIS  
TWR - 118.10 MHz - HOBART TOWER

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	7,383 ft	135.09	ASPHALT	0 ft	197 ft
	45 m	2,250 m	119.77		0 m	60 m
30	148 ft	7,383 ft	315.07	ASPHALT	0 ft	197 ft
	45 m	2,250 m	299.75		0 m	60 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	IHB	109.90 MHz	18 nm	135.08	-	12 ft
				33 km	119.76		12 m
12	GS	IHB	109.90 MHz	10 nm	135.08	3.00	12 ft
				19 km	119.76		12 m

## YMML

Region: AUSTRALIA  
Timezone: AUSTRALIA/MELBOURNE  
Runways: 2

Elevation: 433 ft / 132 m  
Location: -37.665500 144.837000  
Magnetic Var: 11.562 E

## METAR

YMML 040130Z 24007KT 9999 BKN012 12/09 Q1026

## TAF

TAF AMD YMML 040135Z 0401/0506 23008KT 9999 BKN012 BECMG 0402/0403 20005KT 9999 SCT012 FM040900 29005KT CAVOK FM0

## Frequencies

REC - 132.67 MHz - YMML ATIS  
GND - 121.70 MHz - MELBOURNE GND  
APP - 132.00 MHz - MELBOURNE APP  
CLD - 127.20 MHz - MELBOURNE INTL CLD  
TWR - 120.50 MHz - MELBOURNE TWR  
DEP - 118.90 MHz - MELBOURNE DEP

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	148 ft	7,513 ft	94.00	ASPHALT	0 ft	197 ft
	45 m	2,290 m	82.44		0 m	60 m
27	148 ft	7,513 ft	273.98	ASPHALT	0 ft	174 ft
	45 m	2,290 m	262.42		0 m	53 m
16	155 ft	12,012 ft	171.60	ASPHALT	0 ft	200 ft
	47 m	3,661 m	160.04		0 m	61 m
34	155 ft	12,012 ft	351.60	ASPHALT	0 ft	200 ft
	47 m	3,661 m	340.04		0 m	61 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16	LOC-ILS	IMS	109.70 MHz	18 nm	171.60	-	433 ft
				33 km	160.04		433 m
27	LOC-ILS	IMW	109.30 MHz	18 nm	273.99	-	433 ft
				33 km	262.43		433 m
16	GS	IMS	109.70 MHz	10 nm	171.60	3.00	433 ft
				19 km	160.04		433 m
27	GS	IMW	109.30 MHz	10 nm	273.99	3.00	433 ft
				19 km	262.43		433 m