

RCTP

Taiwan Taoyuan International


RJTT

Tokyo Haneda Intl

2024/05/16 2231Z

RCTP MORSU **M750** MANEP **Y753** JAKAL **A1** KEC **Y21** SETSU RJTT

1160.66 nm / 2149.54 km

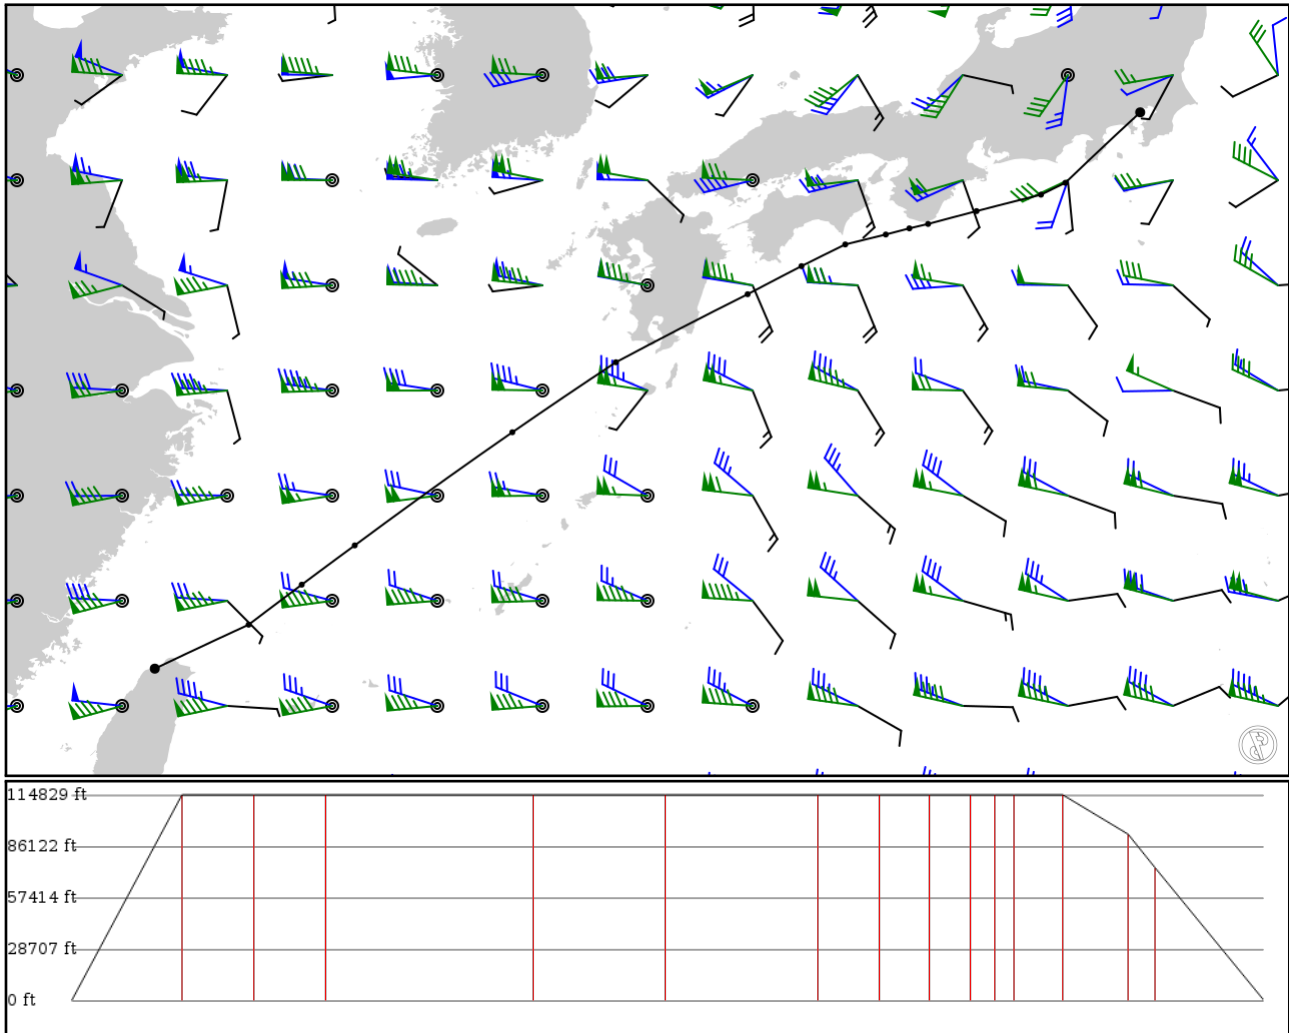

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RCTP	-	25.07773	0 ft	-	Taiwan Taoyuan International
APT	-	121.23282	0 m		
MORSU	-	25.90556	35,000 ft	107	-
FIX	-	123.00000	10,668 m		
MOLKA	M750	26.65861	35,000 ft	70	-
FIX	AWY-LO	124.00000	10,668 m		
MUMBA	M750	27.39776	35,000 ft	69	-
FIX	AWY-LO	124.99827	10,668 m		
MELEN	M750	29.52701	35,000 ft	202	-
FIX	AWY-LO	127.96575	10,668 m		
MOMPA	M750	30.84467	35,000 ft	128	-
FIX	AWY-LO	129.91583	10,668 m		
MADOG	M750	32.12519	35,000 ft	148	-
FIX	AWY-LO	132.39624	10,668 m		
MANEP	M750	32.65369	35,000 ft	60	-
FIX	AWY-LO	133.40956	10,668 m		
JAKAL	Y753	33.06203	35,000 ft	48	-
FIX	AWY-LO	134.23425	10,668 m		
HALON	A1	33.24878	35,000 ft	39	-
FIX	AWY-LO	134.99722	10,668 m		
ALBAT	A1	33.36450	35,000 ft	23	-
FIX	AWY-LO	135.44150	10,668 m		
KEC	A1	33.44775	35,000 ft	18	KUSHIMOTO VORTAC
VOR	AWY-LO	135.79450	10,668 m		
MEIWA	Y21	33.68941	35,000 ft	47	-
FIX	AWY-LO	136.70648	10,668 m		
CELLO	Y21	33.99861	28,300 ft	63	-
FIX	AWY-LO	137.92017	8,626 m		
SETSU	Y21	34.22225	22,600 ft	26	-
FIX	AWY-LO	138.37891	6,888 m		
RJTT	-	35.54825	0 ft	105	Tokyo Haneda Intl
APT	-	139.78855	0 m		

RCTP

Region: REPUBLIC OF CHINA (TAIWAN)
Timezone: ASIA/TAIPEI
Runways: 2

Elevation: 108 ft / 33 m
Location: 25.077900 121.234000
Magnetic Var: 4.992 W

METAR

RCTP 162200Z 18007KT 9999 FEW020 SCT035 BKN180 23/18 Q1012 NOSIG RMK A2991

TAF

TAF RCTP 161700Z 1618/1724 15005KT 9999 FEW015 BKN032 TEMPO 1618/1623 22005KT FEW012 BKN020 BECMG 1700/1702 32008

Frequencies

REC - 127.60 MHz - ATIS	TWR - 129.30 MHz - TAIPEI TOWER
TWR - 118.70 MHz - TAIPEI TOWER	GND - 121.70 MHz - TAIPEI GROUND
GND - 121.60 MHz - TAIPEI GROUND	CLD - 121.80 MHz - TAIPEI CLEARANCE DELIVERY
APP - 119.50 MHz - TAIPEI APPROACH	APP - 119.60 MHz - TAIPEI APPROACH
APP - 119.70 MHz - TAIPEI APPROACH	APP - 123.50 MHz - TAIPEI APPROACH
APP - 123.60 MHz - TAIPEI APPROACH	APP - 124.20 MHz - TAIPEI APPROACH
APP - 125.10 MHz - TAIPEI APPROACH	APP - 125.50 MHz - TAIPEI APPROACH
APP - 125.60 MHz - TAIPEI APPROACH	APP - 128.50 MHz - TAIPEI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05L	197 ft	12,020 ft	49.01	ASPHALT	0 ft	420 ft
	60 m	3,664 m	54.00		0 m	128 m
23R	197 ft	12,020 ft	229.02	ASPHALT	0 ft	390 ft
	60 m	3,664 m	234.01		0 m	119 m
05R	197 ft	12,478 ft	49.01	ASPHALT	328 ft	404 ft
	60 m	3,803 m	54.00		100 m	123 m
23L	197 ft	12,478 ft	229.02	ASPHALT	1,148 ft	394 ft
	60 m	3,803 m	234.01		350 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	ITIA	111.10 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05R	DME	ICKS	110.70 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23R	DME	ITYA	109.30 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23L	DME	ICJN	111.90 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05L	LOC-ILS	ITIA	111.10 MHz	18 nm	49.02	-	108 ft
				33 km	54.01		108 m
05R	LOC-ILS	ICKS	110.70 MHz	18 nm	49.02	-	108 ft
				33 km	54.01		108 m
23L	LOC-ILS	ICJN	111.90 MHz	18 nm	229.02	-	108 ft
				33 km	234.01		108 m
23R	LOC-ILS	ITYA	109.30 MHz	18 nm	229.02	-	108 ft
				33 km	234.01		108 m
05L	GS	ITIA	111.10 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.01		108 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	GS	ICKS	110.70 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.01		108 m
23L	GS	ICJN	111.90 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.01		108 m
23R	GS	ITYA	109.30 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.01		108 m

RJTT

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 4

Elevation: 20 ft / 6 m
Location: 35.547900 139.789000
Magnetic Var: 7.807 W

METAR

RJTT 162200Z 20010KT 9999 FEW030 20/08 Q1010 NOSIG RMK 1CU030 A2984

TAF

TAF RJTT 161705Z 1618/1800 22012KT 9999 FEW030 BECMG 1712/1715 35010KT

Frequencies

REC - 128.80 MHz - TOKYO ATIS	CLD - 121.87 MHz - TOKYO DELIVERY
CLD - 121.82 MHz - TOKYO DELIVERY	GND - 118.22 MHz - TOKYO GROUND
GND - 121.62 MHz - TOKYO GROUND	GND - 121.70 MHz - TOKYO GROUND
GND - 121.97 MHz - TOKYO GROUND	GND - 122.07 MHz - TOKYO GROUND
TWR - 118.10 MHz - TOKYO TOWER	TWR - 118.57 MHz - TOKYO TOWER
TWR - 118.72 MHz - TOKYO TOWER	TWR - 124.35 MHz - TOKYO TOWER
TWR - 118.80 MHz - TOKYO TOWER	TWR - 116.20 MHz - TOKYO TOWER
APP - 119.10 MHz - TOKYO APPROACH	APP - 119.40 MHz - TOKYO APPROACH
APP - 119.65 MHz - TOKYO APPROACH	APP - 119.70 MHz - TOKYO APPROACH
APP - 125.40 MHz - TOKYO APPROACH	APP - 121.27 MHz - TOKYO APPROACH
APP - 124.40 MHz - TOKYO APPROACH	APP - 125.20 MHz - TOKYO APPROACH
APP - 125.80 MHz - TOKYO APPROACH	APP - 127.70 MHz - TOKYO APPROACH
DEP - 126.00 MHz - TOKYO DEPARTURE	DEP - 120.80 MHz - TOKYO DEPARTURE
DEP - 127.50 MHz - TOKYO DEPARTURE	DEP - 127.60 MHz - TOKYO DEPARTURE
DEP - 124.20 MHz - TOKYO DEPARTURE	DEP - 119.60 MHz - TOKYO DEPARTURE
DEP - 120.60 MHz - TOKYO DEPARTURE	DEP - 125.52 MHz - TOKYO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	197 ft	11,039 ft	150.01	ASPHALT	0 ft	190 ft
	60 m	3,365 m	157.82		0 m	58 m
34R	197 ft	11,039 ft	330.02	ASPHALT	1,181 ft	194 ft
	60 m	3,365 m	337.83		360 m	59 m
04	197 ft	8,211 ft	34.92	ASPHALT	0 ft	194 ft
	60 m	2,503 m	42.73		0 m	59 m
22	197 ft	8,211 ft	214.93	ASPHALT	0 ft	190 ft
	60 m	2,503 m	222.74		0 m	58 m
16R	197 ft	9,855 ft	149.98	ASPHALT	0 ft	0 ft
	60 m	3,004 m	157.79		0 m	0 m
34L	197 ft	9,855 ft	329.99	ASPHALT	0 ft	190 ft
	60 m	3,004 m	337.80		0 m	58 m
05	197 ft	8,206 ft	42.44	ASPHALT	0 ft	190 ft
	60 m	2,501 m	50.25		0 m	58 m
23	197 ft	8,206 ft	222.45	ASPHALT	0 ft	194 ft
	60 m	2,501 m	230.26		0 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	DME	IAD	108.10 MHz	18 nm	-	-	46 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	-		46 m
23	DME	ITD	110.50 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
34L	DME	IHA	111.70 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
34R	DME	ITC	108.90 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
16L	LOC-ILS	IOC	111.95 MHz	18 nm	150.02	-	20 ft
				33 km	157.83		20 m
16R	LOC-ILS	ITA	111.55 MHz	18 nm	149.99	-	20 ft
				33 km	157.80		20 m
22	LOC-ILS	IAD	108.10 MHz	18 nm	214.93	-	20 ft
				33 km	222.74		20 m
23	LOC-ILS	ITD	110.50 MHz	18 nm	222.45	-	20 ft
				33 km	230.26		20 m
34L	LOC-ILS	IHA	111.70 MHz	18 nm	329.99	-	20 ft
				33 km	337.80		20 m
34R	LOC-ILS	ITC	108.90 MHz	18 nm	330.02	-	20 ft
				33 km	337.83		20 m
16L	GS	IOC	111.95 MHz	10 nm	150.02	3.00	20 ft
				19 km	157.83		20 m
16R	GS	ITA	111.55 MHz	10 nm	149.99	3.00	20 ft
				19 km	157.80		20 m
22	GS	IAD	108.10 MHz	10 nm	214.93	3.00	20 ft
				19 km	222.74		20 m
23	GS	ITD	110.50 MHz	10 nm	222.45	3.00	20 ft
				19 km	230.26		20 m
34L	GS	IHA	111.70 MHz	10 nm	329.99	3.00	20 ft
				19 km	337.80		20 m
34R	GS	ITC	108.90 MHz	10 nm	330.02	3.00	20 ft
				19 km	337.83		20 m