


2024/06/05 1015Z

PAJN TURKS V317 GESTI J502 YZT V317 COHOE CYVR

710.86 nm / 1316.52 km

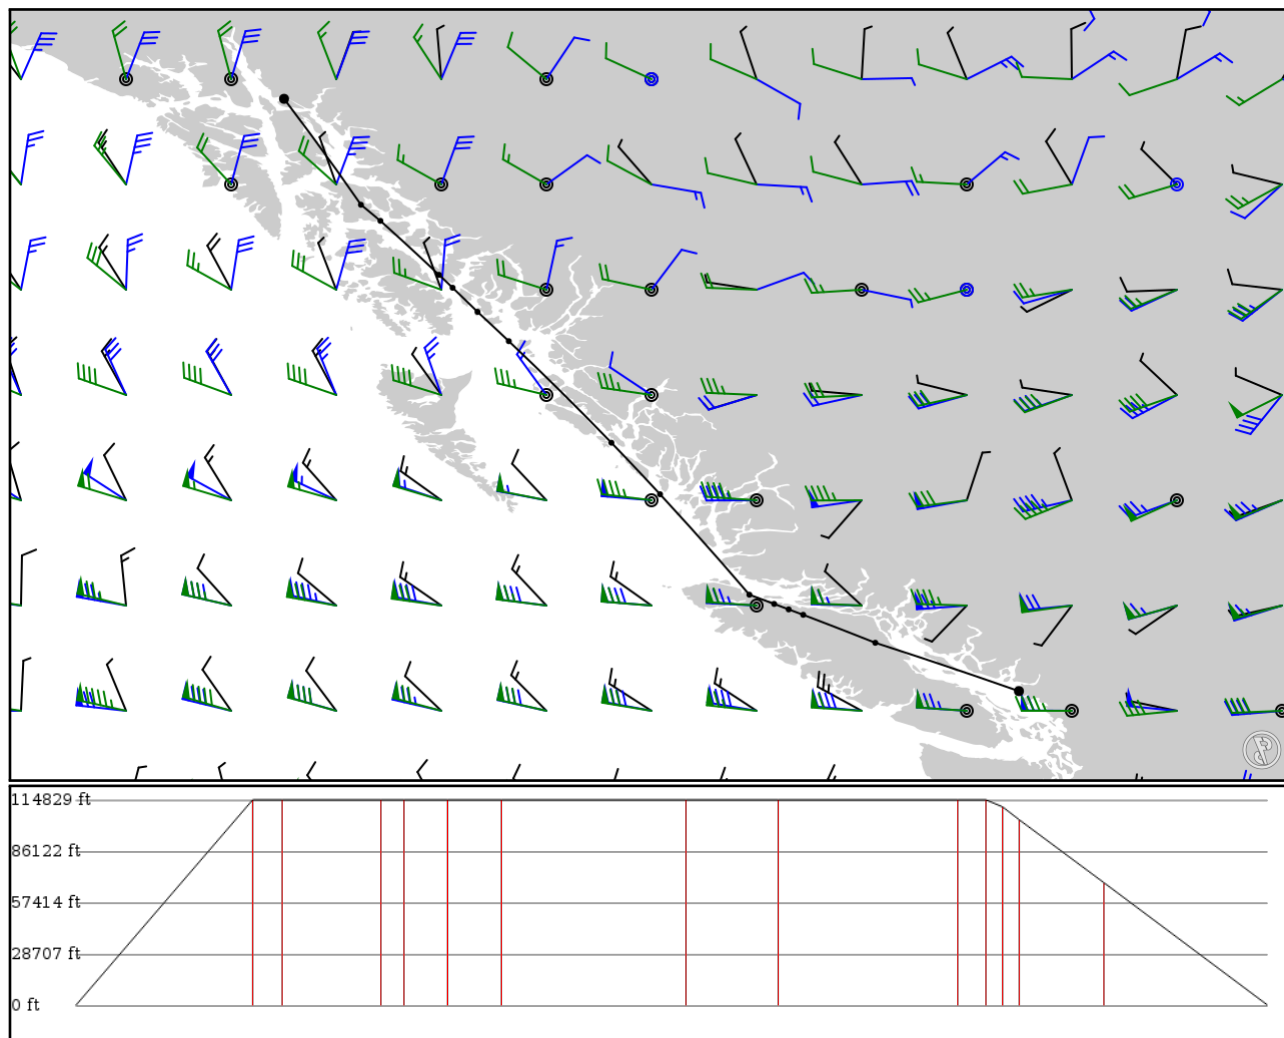

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PAJN	-	58.35496	0 ft	-	Juneau Intl
APT	-	-134.57628	0 m		
TURKS	-	56.71661	35,000 ft	105	-
FIX	-	-133.38462	10,668 m		
LVD	V317	56.46771	35,000 ft	17	LEVEL ISLAND VOR-DME
DME	AWY-LO	-133.08311	10,668 m		
DOOZI	V317	55.63254	35,000 ft	58	-
FIX	AWY-LO	-132.17465	10,668 m		
GESTI	V317	55.43263	35,000 ft	13	-
FIX	AWY-LO	-131.96400	10,668 m		
ANN	J502	55.06042	35,000 ft	25	ANNETTE ISLAND VOR-DME
VOR	AWY-HI	-131.57839	10,668 m		
HANRY	J502	54.60639	35,000 ft	32	-
FIX	AWY-HI	-131.09333	10,668 m		
DUGGS	J502	53.03480	35,000 ft	109	-
FIX	AWY-HI	-129.50333	10,668 m		
PRYCE	J502	52.23825	35,000 ft	55	-
FIX	AWY-HI	-128.74972	10,668 m		
YZT	J502	50.68425	35,000 ft	106	PORT HARDY VOR-DME
VOR	AWY-HI	-127.36519	10,668 m		
CORMO	V317	50.54153	35,000 ft	16	-
FIX	AWY-LO	-126.98108	10,668 m		
FENEL	V317	50.45700	33,800 ft	9	-
FIX	AWY-LO	-126.75619	10,302 m		
ATUNA	V317	50.37319	31,600 ft	9	-
FIX	AWY-LO	-126.53106	9,632 m		
COHOE	V317	49.94056	20,900 ft	50	-
FIX	AWY-LO	-125.41389	6,370 m		
CYVR	-	49.19233	0 ft	97	Vancouver Intl
APT	-	-123.18799	0 m		

PAJN

Region: USA (ALASKA)

Timezone: AMERICA/JUNEAU

Runways: 1

Elevation: 20 ft / 6 m

Location: 58.355000 -134.576000

Magnetic Var: 17.257 E

METAR

PAJN 050953Z 11016KT 10SM -RA FEW007 BKN050 OVC095 09/08 A2957

TAF

PAJN 050524Z 0506/0606 11011KT P6SM -SHRA FEW030 BKN045 BKN110 FM051500 10015G25KT 5SM -SHRA OVC025 FM052000 1202

Frequencies

TWR - 118.70 MHz - JUNEAU TOWER

COM - 122.95 MHz - JUNEAU UNICOM

GND - 121.90 MHz - JUNEAU GROUND

REC - 135.20 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	8,867 ft	104.87	ASPHALT	220 ft	0 ft
	46 m	2,703 m	87.61		67 m	0 m
26	151 ft	8,867 ft	284.90	ASPHALT	217 ft	0 ft
	46 m	2,703 m	267.65		66 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IJDL	109.90 MHz	18 nm	-	-	175 ft
				33 km	-		175 m
08	LOC-LOC	IJDL	109.90 MHz	18 nm	84.92	-	21 ft
				33 km	67.66		21 m

CYVR

Region: CANADA

Timezone: AMERICA/VANCOUVER

Runways: 3

Elevation: 13 ft / 4 m

Location: 49.194000 -123.185000

Magnetic Var: 15.257 E

METAR

CYVR 051000Z 04003KT 20SM FEW060 09/06 A3012 RMK SC1 SLP203

TAF

TAF CYVR 050840Z 0509/0612 20008KT P6SM SCT050 TEMPO 0509/0512 BKN050 BECMG 0510/0512 10008KT FM051200 10008KT P6

Frequencies

REC - 124.60 MHz - ATIS

GND - 121.70 MHz - VANCOUVER GROUND

TWR - 118.70 MHz - VANCOUVER TOWER

APP - 128.60 MHz - VANCOUVER APPROACH

DEP - 126.12 MHz - VANCOUVER DEPARTURE

CLD - 121.40 MHz - CLEARANCE DELIVERY

GND - 127.50 MHz - VANCOUVER GROUND

TWR - 119.55 MHz - VANCOUVER TOWER

APP - 133.10 MHz - VANCOUVER APPROACH

DEP - 132.30 MHz - VANCOUVER DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08R	200 ft	10,777 ft	99.88	ASPHALT	0 ft	0 ft
	61 m	3,285 m	84.62		0 m	0 m
26L	200 ft	10,777 ft	279.91	ASPHALT	0 ft	0 ft
	61 m	3,285 m	264.65		0 m	0 m
13	200 ft	7,294 ft	141.92	ASPHALT	0 ft	0 ft
	61 m	2,223 m	126.66		0 m	0 m
31	200 ft	7,294 ft	321.93	ASPHALT	0 ft	0 ft
	61 m	2,223 m	306.68		0 m	0 m
08L	200 ft	9,916 ft	99.89	CONCRETE	0 ft	0 ft
	61 m	3,022 m	84.63		0 m	0 m
26R	200 ft	9,916 ft	279.92	CONCRETE	0 ft	0 ft
	61 m	3,022 m	264.66		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	ITL	110.55 MHz	18 nm	-	-	1 ft
				33 km	-		1 m
08R	DME	IVR	109.50 MHz	18 nm	-	-	4 ft
				33 km	-		4 m
26L	DME	IFZ	111.95 MHz	20 nm	-	-	10 ft
				37 km	-		10 m
26R	DME	IRD	110.70 MHz	20 nm	-	-	10 ft
				37 km	-		10 m
08L	LOC-ILS	ITL	110.55 MHz	18 nm	99.90	-	13 ft
				33 km	84.64		13 m
08R	LOC-ILS	IVR	109.50 MHz	18 nm	99.89	-	13 ft
				33 km	84.63		13 m
13	LOC-ILS	IMK	111.10 MHz	18 nm	141.93	-	13 ft
				33 km	126.67		13 m
26L	LOC-ILS	IFZ	110.70 MHz	18 nm	279.89	-	13 ft
				33 km	264.63		13 m
26R	LOC-ILS	IRD	111.95 MHz	18 nm	279.90	-	13 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	264.64		13 m
08L	GS	ITL	110.55 MHz	10 nm	99.90	3.00	13 ft
				19 km	84.64		13 m
08R	GS	IVR	109.50 MHz	10 nm	99.89	3.00	13 ft
				19 km	84.63		13 m
13	GS	IMK	111.10 MHz	10 nm	141.93	3.00	13 ft
				19 km	126.67		13 m
26L	GS	IFZ	110.70 MHz	10 nm	279.89	3.00	13 ft
				19 km	264.63		13 m
26R	GS	IRD	111.95 MHz	10 nm	279.90	3.00	13 ft
				19 km	264.64		13 m