


2024/06/07 0103Z

KVGT URIAH **V21** MLF **J107** DDY **V298** CHANG W43

709.03 nm / 1313.13 km

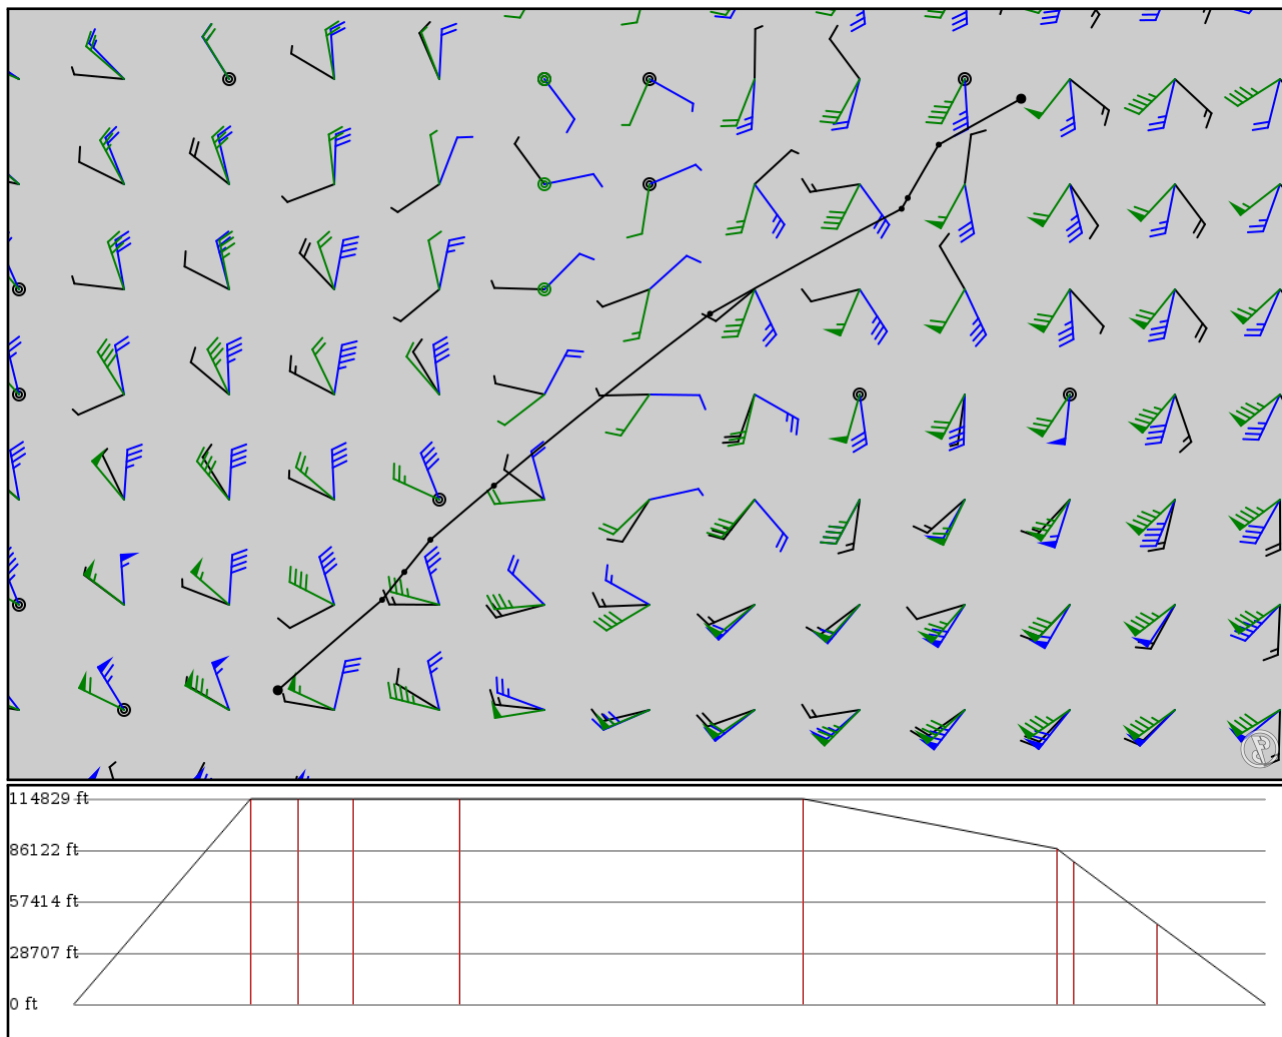

Notes

Basic altitude profile:

- Ascent Rate: 1800ft/min
- Ascent Speed: 150kts
- Cruise Altitude: 28000ft
- Cruise Speed: 300kts
- Descent Rate: 1500ft/min
- Descent Speed: 150kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KVGT APT	-	36.21058 -115.19428	0 ft 0 m	-	North Las Vegas
URIAH FIX	-	37.50285 -113.70265	35,000 ft 10,668 m	105	-
BERYL FIX	V21 AWY-LO	37.90005 -113.38572	35,000 ft 10,668 m	28	-
MLF VOR	V21 AWY-LO	38.36036 -113.01322	35,000 ft 10,668 m	32	MILFORD VORTAC
URNW FIX	J107 AWY-HI	39.13418 -112.10414	35,000 ft 10,668 m	63	-
OCS VOR	J107 AWY-HI	41.59022 -109.01533	35,000 ft 10,668 m	204	ROCK SPRINGS VOR-DME
DDY DME	J107 AWY-HI	43.09086 -106.27702	26,500 ft 8,077 m	151	MUDDY MOUNTAIN VOR-DME
CESPI FIX	V298 AWY-LO	43.24462 -106.18906	24,300 ft 7,407 m	10	-
CHANG FIX	V298 AWY-LO	44.00626 -105.74614	13,700 ft 4,176 m	49	-
W43 APT	-	44.66286 -104.56783	0 ft 0 m	64	HULETT MUNICIPAL

KVGT

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 2,205 ft / 672 m
Location: 36.210600 -115.194000
Magnetic Var: 11.074 E

METAR

KVGT 062353Z 13013G18KT 10SM CLR 43/04 A2971 RMK A02 SLP040 T04330044 10439 20383 56024

TAF

TAF KVGT 062320Z 0700/0724 14007KT P6SM SCT140 FM070100 22010KT P6SM SCT140 FM070900 30006KT P6SM FEW250 FM071600

Frequencies

REC - 118.05 MHz - ATIS	COM - 122.95 MHz - NORTH LAS VEGAS UNICOM
CLD - 124.00 MHz - CLEARANCE DELIVERY	GND - 121.70 MHz - NORTH LAS VEGAS GROUND
TWR - 125.70 MHz - NORTH LAS VEGAS TOWER	APP - 119.40 MHz - LAS VEGAS APPROACH
APP - 118.12 MHz - LAS VEGAS APPROACH	APP - 125.02 MHz - LAS VEGAS APPROACH
APP - 125.60 MHz - LAS VEGAS APPROACH	DEP - 119.40 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	74 ft	4,994 ft	88.60	ASPHALT	0 ft	299 ft
	23 m	1,522 m	77.53		0 m	91 m
26	74 ft	4,994 ft	268.61	ASPHALT	0 ft	302 ft
	23 m	1,522 m	257.54		0 m	92 m
12R	74 ft	5,000 ft	134.46	ASPHALT	0 ft	302 ft
	23 m	1,524 m	123.38		0 m	92 m
30L	74 ft	5,000 ft	314.46	ASPHALT	0 ft	302 ft
	23 m	1,524 m	303.39		0 m	92 m
12L	74 ft	4,365 ft	134.45	ASPHALT	174 ft	0 ft
	23 m	1,331 m	123.38		53 m	0 m
30R	74 ft	4,365 ft	314.46	ASPHALT	200 ft	151 ft
	23 m	1,331 m	303.38		61 m	46 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IHWG	110.70 MHz	18 nm	-	-	2,151 ft
				33 km	-		2,151 m
12L	LOC-ILS	IHWG	110.70 MHz	18 nm	134.46	-	2,205 ft
				33 km	123.39		2,205 m
12L	GS	IHWG	110.70 MHz	10 nm	134.46	3.20	2,205 ft
				19 km	123.39		2,205 m