


EGLL
London Heathrow

KLAX
Los Angeles Intl

2024/05/07 0141Z

EGLL KLAX

4731.17 nm / 8762.13 km

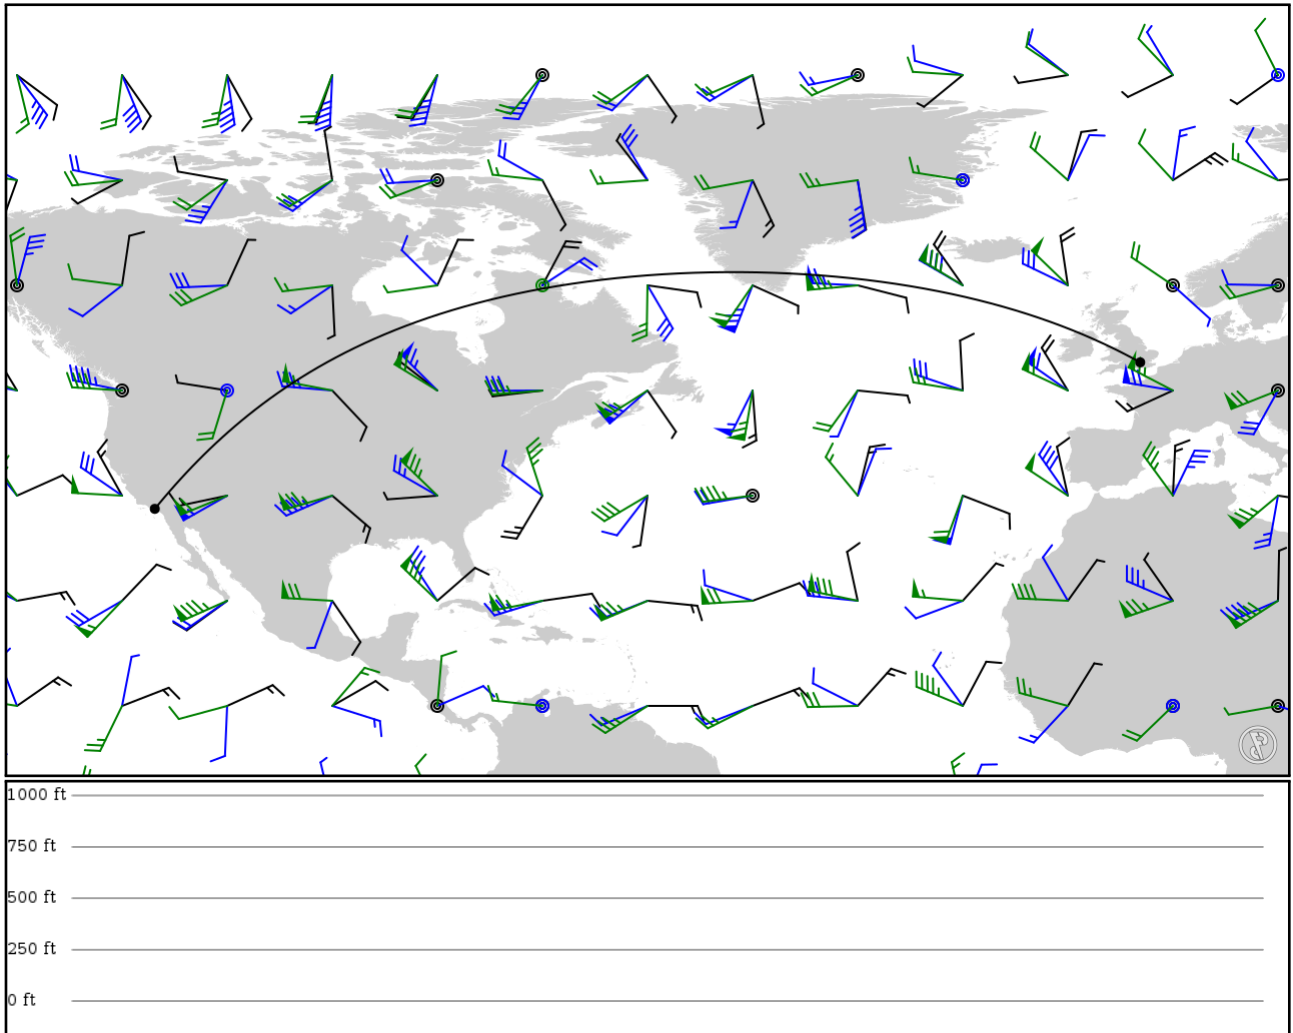

Notes

Requested: EGLL KLAX

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EGLL	-	51.47120	0 ft	-	London Heathrow
APT	-	-0.46088	0 m		
KLAX	-	33.94310	0 ft	4731	Los Angeles Intl
APT	-	-118.40900	0 m		

EGLL

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 2

Elevation: 83 ft / 25 m
Location: 51.471200 -0.460881
Magnetic Var: 0.376 E

METAR

EGLL 070120Z AUTO 01005KT 9999 NCD 12/10 Q1015

TAF

TAF EGLL 062254Z 0700/0806 02004KT 9999 FEW040 PROB30 TEMPO 0700/0702 8000 -RA TEMPO 0702/0707 7000 PROB30 0702/0707 4000

Frequencies

REC - 128.07 MHz - HEATHROW INFORMATION	REC - 121.92 MHz - HEATHROW INFORMATION
CLD - 121.97 MHz - HEATHROW DELIVERY	GND - 121.70 MHz - HEATHROW GROUND
GND - 121.85 MHz - HEATHROW GROUND	GND - 121.90 MHz - HEATHROW GROUND
TWR - 118.50 MHz - HEATHROW TOWER	TWR - 118.70 MHz - HEATHROW TOWER
TWR - 124.47 MHz - HEATHROW TOWER	APP - 119.72 MHz - HEATHROW DIRECTOR
APP - 120.40 MHz - HEATHROW DIRECTOR	APP - 134.97 MHz - HEATHROW DIRECTOR
APP - 125.62 MHz - HEATHROW RADAR	APP - 127.52 MHz - HEATHROW RADAR
DEP - 120.52 MHz - HEATHROW DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	164 ft	12,770 ft	89.66	ASPHALT	1,007 ft	0 ft
	50 m	3,892 m	89.29		307 m	0 m
27R	164 ft	12,770 ft	269.70	ASPHALT	0 ft	177 ft
	50 m	3,892 m	269.33		0 m	54 m
09R	164 ft	11,975 ft	89.68	ASPHALT	1,004 ft	0 ft
	50 m	3,650 m	89.31		306 m	0 m
27L	164 ft	11,975 ft	269.72	ASPHALT	0 ft	95 ft
	50 m	3,650 m	269.35		0 m	29 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IAA	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09R	DME	IBB	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27L	DME	ILL	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27R	DME	IRR	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09L	LOC-ILS	IAA	110.30 MHz	18 nm	89.68	-	83 ft
				33 km	89.30		83 m
09R	LOC-ILS	IBB	109.50 MHz	18 nm	89.70	-	83 ft
				33 km	89.32		83 m
27L	LOC-ILS	ILL	109.50 MHz	18 nm	269.70	-	83 ft
				33 km	269.32		83 m
27R	LOC-ILS	IRR	110.30 MHz	18 nm	269.68	-	83 ft
				33 km	269.30		83 m
09L	GS	IAA	110.30 MHz	10 nm	89.68	3.00	83 ft
				19 km	89.30		83 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	GS	IBB	109.50 MHz	10 nm	89.70	3.00	83 ft
				19 km	89.32		83 m
27L	GS	ILL	109.50 MHz	10 nm	269.70	3.00	83 ft
				19 km	269.32		83 m
27R	GS	IRR	110.30 MHz	10 nm	269.68	3.00	83 ft
				19 km	269.30		83 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.442 E

METAR

KLAX 070053Z 24010KT 10SM FEW250 16/09 A2996 RMK AO2 SLP144 T01610089 \$

TAF

KLAX 062346Z 0700/0806 26010KT P6SM FEW200 FM070300 26008KT P6SM FEW200 FM070900 06005KT P6SM FEW020 FM071500 VRB

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.53		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.50		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m