

URKK

Krasnodar Pashkovsky


URKA

Anapa Vityazevo Reg1

2024/04/28 0254Z

URKK ODARI URKA

78.18 nm / 144.78 km

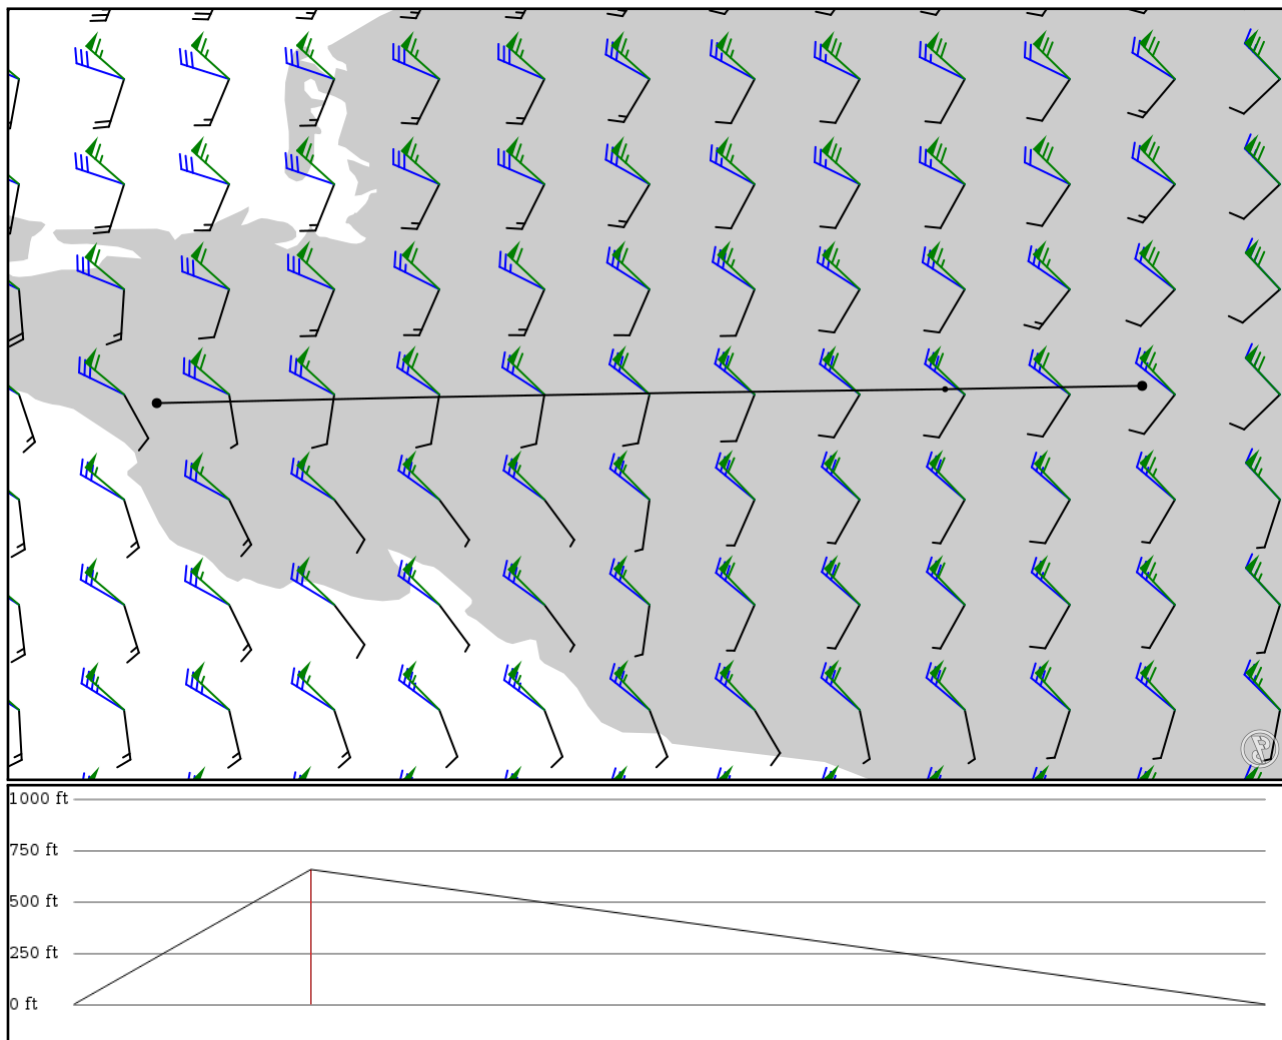

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 250ft
- Cruise Speed: 320kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
URKK	-	45.03430	0 ft	-	Krasnodar Pashkovsky
APT	-	39.18820	0 m		
ODARI	-	45.02810	200 ft	15	-
FIX	-	38.82000	61 m		
URKA	-	45.00210	0 ft	62	Anapa Vityazevo Regl
APT	-	37.34730	0 m		

URKK

Region: RUSSIA
Timezone: EUROPE/MOSCOW
Runways: 1

Elevation: 118 ft / 36 m
Location: 45.034300 39.188200
Magnetic Var: 7.962 E

METAR

URKK 280230Z 02002MPS CAVOK 14/12 Q1016 R05R/CLRD70 TEMPO 0500 FG RMK QFE759

TAF

TAF URKK 280148Z 2803/2903 06003G08MPS 9999 SCT030 TEMPO 2803/2812 10003MPS SCT020CB TEMPO 2821/2903 34003MPS

Frequencies

REC - 122.45 MHz - ATIS	TWR - 118.20 MHz - KRASNODAR TOWER
GND - 119.00 MHz - KRASNODAR GROUND	APP - 127.70 MHz - KRASNODAR APPROACH
APP - 129.60 MHz - KRASNODAR APPROACH	APP - 121.30 MHz - KRASNODAR RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	145 ft	9,833 ft	52.49	CONCRETE	0 ft	0 ft
	44 m	2,997 m	44.53		0 m	0 m
23L	145 ft	9,833 ft	232.51	CONCRETE	0 ft	0 ft
	44 m	2,997 m	224.55		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	LOC-ILS	IKR	110.70 MHz	18 nm	52.50	-	118 ft
				33 km	44.54		118 m
23L	LOC-ILS	ILD	109.50 MHz	18 nm	232.50	-	118 ft
				33 km	224.54		118 m
05R	GS	IKR	110.70 MHz	10 nm	52.50	2.70	118 ft
				19 km	44.54		118 m
23L	GS	ILD	109.50 MHz	10 nm	232.50	2.70	118 ft
				19 km	224.54		118 m

URKA

Region: RUSSIA
Timezone: EUROPE/MOSCOW
Runways: 1

Elevation: 176 ft / 54 m
Location: 45.002100 37.347300
Magnetic Var: 7.793 E

METAR

URKA 280230Z 00000MPS CAVOK 14/14 Q1016 R22/010070 TEMPO 1000 BR SCT004 RMK QFE757/1010

TAF

TAF TAF URKA 280154Z 2803/2903 06003MPS 6000 SCT016 TEMPO 2803/2812 23003G08MPS SCT011 PROB40 2803/2812 1000 BR B

Frequencies

TWR - 119.80 MHz - ANAPA TOWER
REC - 125.40 MHz - ANAPA ATIS

COM - 118.70 MHz - ANAPA RADAR
TWR - 118.90 MHz - ANAPA GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	148 ft	8,210 ft	42.13	CONCRETE	0 ft	0 ft
	45 m	2,502 m	34.34		0 m	0 m
22	148 ft	8,210 ft	222.15	CONCRETE	0 ft	0 ft
	45 m	2,502 m	214.35		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	LOC-ILS	IAN	109.10 MHz	18 nm	42.14	-	176 ft
				33 km	34.35		176 m
22	LOC-ILS	IAP	110.90 MHz	18 nm	222.14	-	176 ft
				33 km	214.35		176 m
04	GS	IAN	109.10 MHz	10 nm	42.14	3.00	176 ft
				19 km	34.35		176 m
22	GS	IAP	110.90 MHz	10 nm	222.14	3.00	176 ft
				19 km	214.35		176 m