

KDTS

Destin Ft Walton Beach


KDTW

Detroit Metro Wayne Co

2024/05/29 0240Z

KDTS RISDE V329 MGM V415 HEFIN V243 GQO V333 HYK V57 FLM J43 MAYZE KDTW

730.99 nm / 1353.80 km

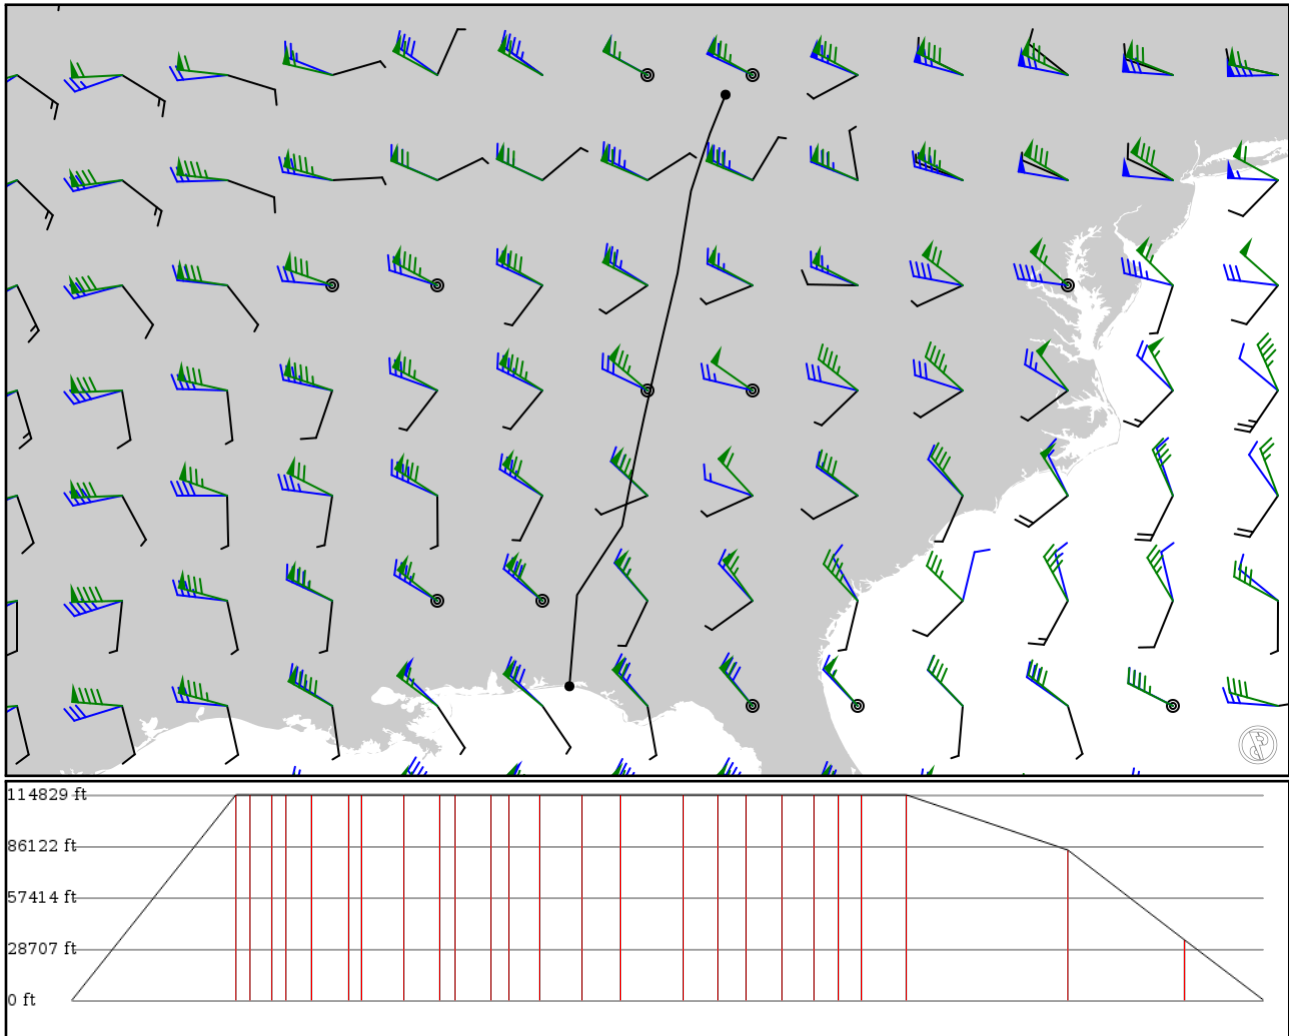

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDTS APT	-	30.40006 -86.47147	0 ft 0 m	-	Destin Ft Walton Beach
RISDE FIX	-	32.07233 -86.33172	35,000 ft 10,668 m	100	-
MGM VOR	V329 AWY-LO	32.22228 -86.31972	35,000 ft 10,668 m	9	MONTGOMERY VORTAC
FIMON FIX	V415 AWY-LO	32.41277 -86.19706	35,000 ft 10,668 m	13	-
WETUM FIX	V415 AWY-LO	32.54352 -86.11252	35,000 ft 10,668 m	8	-
SEMAN FIX	V415 AWY-LO	32.77249 -85.96373	35,000 ft 10,668 m	15	-
CAMPP FIX	V415 AWY-LO	33.10289 -85.74752	35,000 ft 10,668 m	22	-
GIFFY FIX	V415 AWY-LO	33.22203 -85.66912	35,000 ft 10,668 m	8	-
HEFIN FIX	V415 AWY-LO	33.59854 -85.41958	35,000 ft 10,668 m	25	-
FELTO FIX	V243 AWY-LO	33.96354 -85.34915	35,000 ft 10,668 m	22	-
GORGO FIX	V243 AWY-LO	34.10839 -85.32101	35,000 ft 10,668 m	8	-
METAE FIX	V243 AWY-LO	34.47154 -85.25013	35,000 ft 10,668 m	22	-
UZOVO FIX	V243 AWY-LO	34.65541 -85.21389	35,000 ft 10,668 m	11	-
GQO DME	V243 AWY-LO	34.96126 -85.15337	35,000 ft 10,668 m	18	CHOO CHOO VORTAC
BOOPS FIX	V333 AWY-LO	35.39085 -85.06215	35,000 ft 10,668 m	26	-
HCH DME	V333 AWY-LO	35.78101 -84.97845	35,000 ft 10,668 m	23	HINCH MOUNTAIN VORTAC
JELLO FIX	V333 AWY-LO	36.41016 -84.83579	35,000 ft 10,668 m	38	-
WNSOR FIX	V333 AWY-LO	36.76095 -84.75520	35,000 ft 10,668 m	21	-
FIBKE FIX	V333 AWY-LO	37.03946 -84.69069	35,000 ft 10,668 m	17	-
DOLLY FIX	V333 AWY-LO	37.40065 -84.60636	35,000 ft 10,668 m	22	-
REILY FIX	V333 AWY-LO	37.72186 -84.53061	35,000 ft 10,668 m	19	-
HYK VOR	V333 AWY-LO	37.96636 -84.47250	35,000 ft 10,668 m	14	LEXINGTON VORTAC
SADDL FIX	V57 AWY-LO	38.20422 -84.41647	35,000 ft 10,668 m	14	-
FLM VOR	V57 AWY-LO	38.64950 -84.31064	35,000 ft 10,668 m	27	FALMOUTH VOR-DME
ROD VOR	J43 AWY-HI	40.28781 -84.04308	25,600 ft 7,803 m	99	ROSEWOOD VORTAC
MAYZE FIX	J43 AWY-HI	41.43852 -83.66407	10,300 ft 3,139 m	71	-
KDTW APT	-	42.21220 -83.35259	0 ft 0 m	48	Detroit Metro Wayne Co

KDTW

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 6

Elevation: 645 ft / 197 m
Location: 42.212200 -83.352600
Magnetic Var: 7.492 W

METAR

KDTW 290153Z 08005KT 10SM SCT080 OVC100 16/11 A2997 RMK A02 SLP149 T01610111

TAF

TAF AMD KDTW 290138Z 2902/3006 34008KT P6SM -SHRA SCT060 OVC100 FM290400 35005KT P6SM SCT050 OVC120 FM291500 3601

Frequencies

REC - 118.12 MHz - ATIS	REC - 133.67 MHz - ATIS
COM - 122.95 MHz - UNICOM	CLD - 120.65 MHz - CLEARANCE DELIVERY
GND - 119.25 MHz - METRO GROUND	GND - 119.45 MHz - METRO GROUND
GND - 121.80 MHz - METRO GROUND	GND - 132.72 MHz - METRO GROUND
TWR - 118.40 MHz - METRO TOWER	TWR - 128.12 MHz - METRO TOWER
TWR - 128.75 MHz - METRO TOWER	TWR - 135.00 MHz - METRO TOWER
APP - 124.05 MHz - DETROIT APPROACH	APP - 125.15 MHz - DETROIT APPROACH
DEP - 118.95 MHz - DETROIT DEPARTURE	DEP - 125.52 MHz - DETROIT DEPARTURE
DEP - 132.02 MHz - DETROIT DEPARTURE	DEP - 134.30 MHz - DETROIT DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	200 ft	12,011 ft	28.61	CONCRETE	512 ft	397 ft
	61 m	3,661 m	36.11		156 m	121 m
22L	200 ft	12,011 ft	208.63	CONCRETE	0 ft	433 ft
	61 m	3,661 m	216.12		0 m	132 m
03R	151 ft	10,005 ft	28.61	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.10		0 m	122 m
21L	151 ft	10,005 ft	208.62	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.12		0 m	122 m
04L	151 ft	10,003 ft	28.58	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.07		0 m	122 m
22R	151 ft	10,003 ft	208.59	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.09		0 m	122 m
09L	151 ft	8,687 ft	88.70	CONCRETE	0 ft	400 ft
	46 m	2,648 m	96.20		0 m	122 m
27R	151 ft	8,687 ft	268.72	CONCRETE	0 ft	400 ft
	46 m	2,648 m	276.22		0 m	122 m
03L	150 ft	8,505 ft	28.62	CONCRETE	0 ft	400 ft
	46 m	2,592 m	36.12		0 m	122 m
21R	150 ft	8,505 ft	208.63	CONCRETE	0 ft	397 ft
	46 m	2,592 m	216.13		0 m	121 m
09R	151 ft	8,480 ft	88.71	CONCRETE	0 ft	400 ft
	46 m	2,585 m	96.20		0 m	122 m
27L	151 ft	8,480 ft	268.73	CONCRETE	0 ft	400 ft
	46 m	2,585 m	276.22		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
--------	------	-------	-----------	-------	-------------------------	-------	-----------

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHJT	111.95 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
04R	DME	IDTW	110.70 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
22L	DME	IDWC	110.70 MHz	18 nm	-	-	646 ft
				33 km	-		646 m
03R	LOC-ILS	IHUU	111.50 MHz	18 nm	28.62	-	645 ft
				33 km	36.11		645 m
04L	LOC-ILS	IHJT	111.95 MHz	18 nm	28.59	-	645 ft
				33 km	36.08		645 m
04R	LOC-ILS	IDTW	110.70 MHz	18 nm	28.63	-	645 ft
				33 km	36.12		645 m
21L	LOC-ILS	IEJR	111.50 MHz	18 nm	208.62	-	645 ft
				33 km	216.11		645 m
22L	LOC-ILS	IDWC	110.70 MHz	18 nm	208.63	-	645 ft
				33 km	216.12		645 m
22R	LOC-ILS	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
27L	LOC-ILS	IEPA	110.15 MHz	18 nm	268.72	-	645 ft
				33 km	276.21		645 m
27R	LOC-ILS	IDMI	108.50 MHz	18 nm	268.71	-	645 ft
				33 km	276.20		645 m
22R	LOC-LOC	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.09		645 m
03R	GS	IHUU	111.50 MHz	10 nm	28.62	3.00	645 ft
				19 km	36.11		645 m
04L	GS	IHJT	111.95 MHz	10 nm	28.59	3.00	645 ft
				19 km	36.08		645 m
04R	GS	IDTW	110.70 MHz	10 nm	28.63	3.00	645 ft
				19 km	36.12		645 m
21L	GS	IEJR	111.50 MHz	10 nm	208.62	3.00	645 ft
				19 km	216.11		645 m
22L	GS	IDWC	110.70 MHz	10 nm	208.63	2.85	645 ft
				19 km	216.12		645 m
22R	GS	IJKI	111.95 MHz	10 nm	208.59	3.00	645 ft
				19 km	216.08		645 m
27L	GS	IEPA	110.15 MHz	10 nm	268.72	3.00	645 ft
				19 km	276.21		645 m
27R	GS	IDMI	108.50 MHz	10 nm	268.71	3.00	645 ft
				19 km	276.20		645 m