

LIML

Milano-Linate "Enrico Forlanini"


LSGG

Geneva

2024/05/16 0139Z

LIML BAYMI LSGG

140.59 nm / 260.38 km

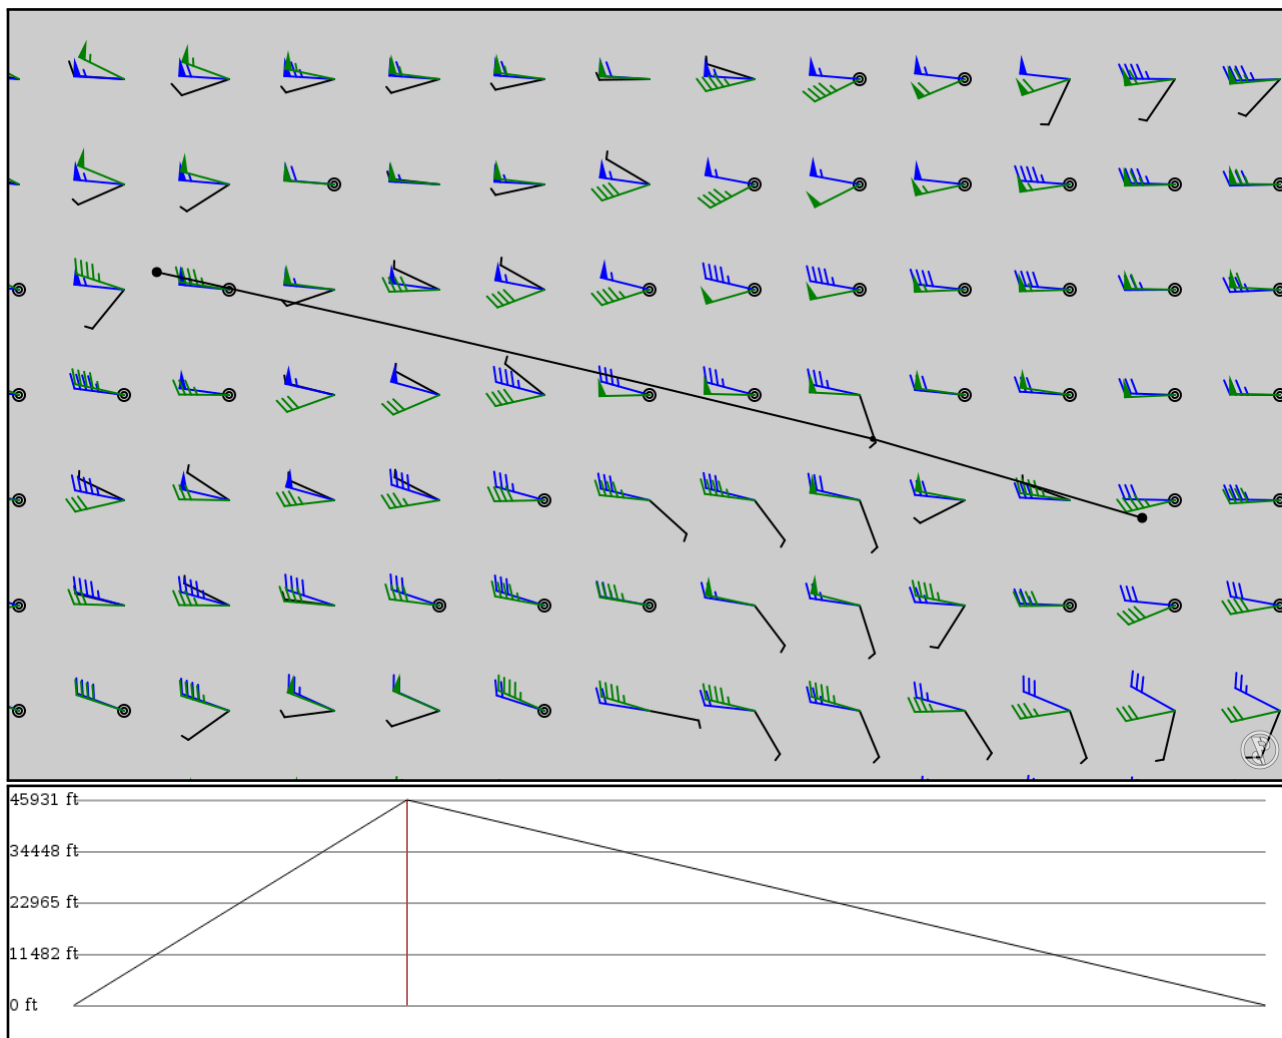

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
LIML	-	45.45030	0 ft	-	Milano-Linate	"Enrico Forlanini"
APT	-	9.27281	0 m			
BAVMI	-	45.70360	14,000 ft	39	-	
FIX	-	8.40778	4,267 m			
LSGG	-	46.23810	0 ft	101	Geneva	
APT	-	6.10901	0 m			

LIML

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 354 ft / 108 m
Location: 45.450300 9.272810
Magnetic Var: 3.241 E

METAR

LIML 160050Z VRB01KT 9999 SCT025 BKN070 14/14 Q1008 NOSIG

TAF

TAF LIML 152300Z 1600/1624 VRB05KT 6000 BKN020 TEMPO 1600/1609 RA BECMG 1609/1611 10010KT TEMPO 1609/1622 3000 TS

Frequencies

REC - 136.37 MHz - ATIS	GND - 121.80 MHz - LINATE GROUND
TWR - 118.40 MHz - LINATE TOWER	TWR - 118.10 MHz - LINATE TOWER
APP - 134.17 MHz - MILANO RADAR	APP - 126.75 MHz - MILANO RADAR
APP - 126.30 MHz - MILANO RADAR	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	197 ft	8,019 ft	175.67	ASPHALT	0 ft	200 ft
	60 m	2,444 m	172.43		0 m	61 m
36	197 ft	8,019 ft	355.67	ASPHALT	0 ft	413 ft
	60 m	2,444 m	352.43		0 m	126 m
17	72 ft	1,974 ft	175.66	ASPHALT	0 ft	0 ft
	22 m	602 m	172.42		0 m	0 m
35	72 ft	1,974 ft	355.66	ASPHALT	0 ft	0 ft
	22 m	602 m	352.42		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
36	DME	ILNT	109.55 MHz	25 nm	-	-	352 ft
				46 km	-		352 m
36	LOC-ILS	ILNT	109.55 MHz	18 nm	355.69	-	353 ft
				33 km	352.45		353 m
36	GS	ILNT	109.55 MHz	10 nm	355.68	3.00	352 ft
				19 km	352.44		352 m

LSGG

Region: SWITZERLAND
Timezone: EUROPE/ZURICH
Runways: 1

Elevation: 1,411 ft / 430 m
Location: 46.238100 6.109010
Magnetic Var: 2.512 E

METAR

LSGG 160120Z AUTO VRB02KT 9999 FEW042 10/10 Q1008 NOSIG

TAF

TAF TAF LSGG 152325Z 1600/1706 VRB02KT 9999 FEW020 BKN045 TX17/1615Z TN10/1605Z TN09/1705Z TEMPO 1600/1621 SHRA P

Frequencies

REC - 124.75 MHz - ATIS	REC - 135.57 MHz - ATIS
GND - 121.75 MHz - GENEVA APRON	GND - 121.85 MHz - GENEVA APRON
GND - 121.67 MHz - GENEVA GROUND	GND - 119.70 MHz - GENEVA GROUND
TWR - 118.70 MHz - GENEVA TOWER	TWR - 119.90 MHz - GENEVA TOWER
DEP - 131.32 MHz - GENEVA DEPARTURE	DEP - 119.52 MHz - GENEVA DEPARTURE
APP - 136.45 MHz - GENEVA TRANSIT	APP - 136.25 MHz - GENEVA ARRIVAL
APP - 130.55 MHz - GENEVA APPROACH	APP - 120.30 MHz - GENEVA FINAL

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	164 ft	12,806 ft	45.42	CONCRETE	1,076 ft	0 ft
	50 m	3,903 m	42.91		328 m	0 m
22	164 ft	12,806 ft	225.45	CONCRETE	0 ft	0 ft
	50 m	3,903 m	222.94		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	LOC-ILS	INE	110.90 MHz	18 nm	45.44	-	1,411 ft
				33 km	42.93		1,411 m
22	LOC-ILS	ISW	109.90 MHz	18 nm	225.44	-	1,411 ft
				33 km	222.93		1,411 m
04	GS	INE	110.90 MHz	10 nm	45.44	3.00	1,411 ft
				19 km	42.93		1,411 m
22	GS	ISW	109.90 MHz	10 nm	225.44	3.00	1,411 ft
				19 km	222.93		1,411 m