

VIDP

Indira Gandhi Intl


VOSX

SULUR

2024/05/03 0732Z

VIDP OSRAM W20 BPL J3 HIA Q21 BIA W118 APGUN VOSX

1071.93 nm / 1985.22 km

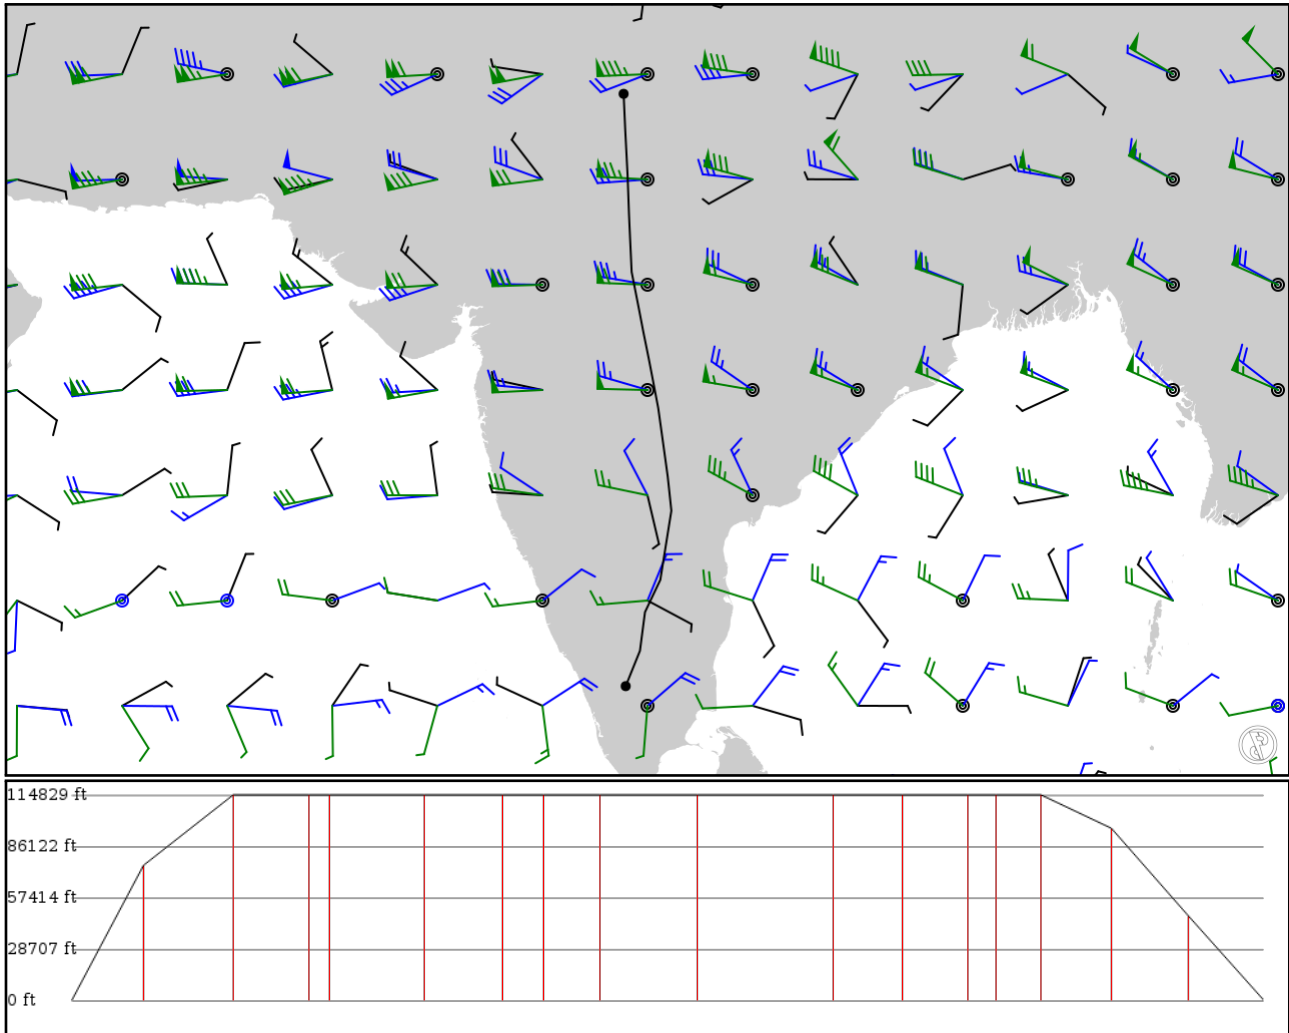

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VIDP	-	28.55850	0 ft	-	Indira Gandhi Intl
APT	-	77.09790	0 m	-	
OSRAM	-	27.48360	23,000 ft	64	-
FIX	-	77.14610	7,010 m	-	-
BAVOX	W20	26.14190	35,000 ft	80	-
FIX	AWY-HI	77.21560	10,668 m	-	-
BUKLO	W20	25.00030	35,000 ft	68	-
FIX	AWY-HI	77.25720	10,668 m	-	-
PUKES	W20	24.70060	35,000 ft	18	-
FIX	AWY-HI	77.27000	10,668 m	-	-
BPL	W20	23.28270	35,000 ft	85	BHOPAL
VOR	AWY-HI	77.33590	10,668 m	-	
BIGIL	J3	22.11720	35,000 ft	71	-
FIX	AWY-HI	77.56560	10,668 m	-	-
UPTAR	J3	21.51170	35,000 ft	36	-
FIX	AWY-HI	77.68190	10,668 m	-	-
TAMID	J3	20.68830	35,000 ft	50	-
FIX	AWY-HI	77.84890	10,668 m	-	-
BUSBO	J3	19.24940	35,000 ft	87	-
FIX	AWY-HI	78.12500	10,668 m	-	-
HIA	J3	17.22780	35,000 ft	122	HYDERABAD
VOR	AWY-HI	78.40580	10,668 m	-	
LURGI	Q21	16.20950	35,000 ft	61	-
FIX	AWY-HI	78.51480	10,668 m	-	-
PADBI	Q21	15.23230	35,000 ft	59	-
FIX	AWY-HI	78.35840	10,668 m	-	-
RITNU	Q21	14.81740	35,000 ft	25	-
FIX	AWY-HI	78.29200	10,668 m	-	-
TELUV	Q21	14.16180	35,000 ft	39	-
FIX	AWY-HI	78.18700	10,668 m	-	-
BIA	Q21	13.20680	29,300 ft	63	BENGALURU
VOR	AWY-HI	77.73220	8,931 m	-	
APGUN	W118	12.06110	14,400 ft	69	-
FIX	AWY-HI	77.58270	4,389 m	-	-
VOSX	-	11.01360	0 ft	67	SULUR
APT	-	77.15970	0 m	-	

VIDP

Region: INDIA
Timezone: ASIA/KOLKATA
Runways: 3

Elevation: 778 ft / 237 m
Location: 28.558500 77.097900
Magnetic Var: 1.599 E

METAR

VIDP 030700Z 29006G16KT 5000 HZ SCT100 36/02 Q1007 NOSIG

TAF

TAF VIDP 030500Z 0306/0412 27010KT 3500 HZ NSC BECMG 0308/0310 29010G20KT 6000 FEW100 BECMG 0318/0320 25008KT 3000

Frequencies

REC - 126.40 MHz - DELHI ATIS
TWR - 118.10 MHz - DELHI TOWER
APP - 124.20 MHz - DELHI APPROACH
GND - 121.90 MHz - DELHI GROUND
APP - 126.35 MHz - DELHI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	197 ft	14,509 ft	103.69	ASPHALT	2,106 ft	0 ft
	60 m	4,422 m	102.10		642 m	0 m
29	197 ft	14,509 ft	283.72	ASPHALT	4,780 ft	0 ft
	60 m	4,422 m	282.12		1,457 m	0 m
10	150 ft	12,511 ft	104.69	ASPHALT	0 ft	883 ft
	46 m	3,813 m	103.09		0 m	269 m
28	150 ft	12,511 ft	284.71	ASPHALT	0 ft	476 ft
	46 m	3,813 m	283.11		0 m	145 m
09	150 ft	9,219 ft	91.44	ASPHALT	0 ft	197 ft
	46 m	2,810 m	89.84		0 m	60 m
27	150 ft	9,219 ft	271.46	ASPHALT	499 ft	0 ft
	46 m	2,810 m	269.86		152 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	DEL	109.50 MHz	18 nm	-	-	777 ft
				33 km	-		777 m
27	DME	IDLH	110.50 MHz	18 nm	-	-	777 ft
				33 km	-		777 m
28	DME	IPLM	110.30 MHz	18 nm	-	-	777 ft
				33 km	-		777 m
09	LOC-ILS	IDIA	108.50 MHz	18 nm	91.45	-	778 ft
				33 km	89.85		778 m
10	LOC-ILS	IDEL	109.50 MHz	18 nm	104.70	-	778 ft
				33 km	103.10		778 m
27	LOC-ILS	IDLH	110.50 MHz	18 nm	271.45	-	778 ft
				33 km	269.85		778 m
28	LOC-ILS	IPLM	110.30 MHz	18 nm	284.70	-	778 ft
				33 km	283.10		778 m
11	LOC-ILS	IDMR	111.30 MHz	18 nm	103.71	-	778 ft
				33 km	102.11		778 m
29	LOC-ILS	IDGM	110.90 MHz	18 nm	283.71	-	778 ft
				33 km	282.11		778 m
09	GS	IDIA	108.50 MHz	10 nm	91.45	3.00	778 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	89.85		778 m
10	GS	IDEL	109.50 MHz	10 nm	104.70	3.00	778 ft
				19 km	103.10		778 m
27	GS	IDLH	110.50 MHz	10 nm	271.45	3.00	778 ft
				19 km	269.85		778 m
28	GS	IPLM	110.30 MHz	10 nm	284.70	3.00	778 ft
				19 km	283.10		778 m
11	GS	IDMR	111.30 MHz	10 nm	103.71	3.00	778 ft
				19 km	102.11		778 m
29	GS	IDGM	110.90 MHz	10 nm	283.71	3.00	778 ft
				19 km	282.11		778 m