

KPHX

Phoenix Sky Harbor Intl


KLIT

Adams Field/Bill and Hillary Clinton National

2024/05/21 0354Z

KPHX CAMVI V190 ABQ V12 PNH V140 BFV V272 IRW V210 MINGG V272 FSM V74 CHARR KLIT

1012.09 nm / 1874.39 km

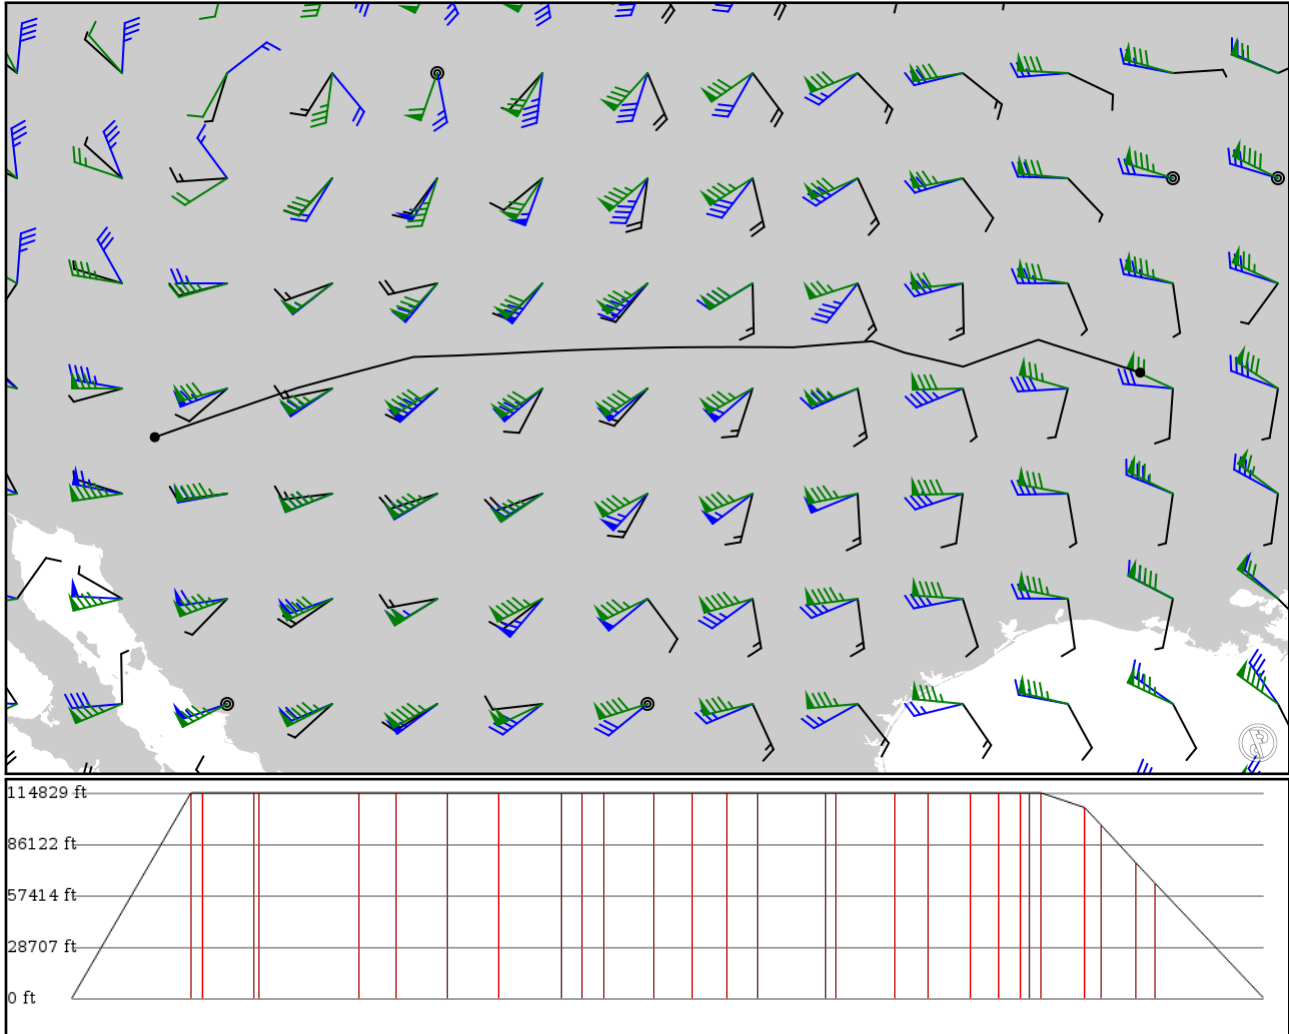

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KPHX APT	-	33.43360 -112.01200	0 ft 0 m	-	Phoenix Sky Harbor Intl
CAMVI FIX	-	34.08680 -110.13400	35,000 ft 10,668 m	101	-
HOZER FIX	V190 AWY-LO	34.15070 -109.94900	35,000 ft 10,668 m	9	-
SJN VOR	V190 AWY-LO	34.42400 -109.14400	35,000 ft 10,668 m	43	ST JOHNS
IZZOM FIX	V190 AWY-LO	34.45050 -109.04800	35,000 ft 10,668 m	5	-
ACOMA FIX	V190 AWY-LO	34.88770 -107.42200	35,000 ft 10,668 m	84	-
ABQ VOR	V190 AWY-LO	35.04380 -106.81600	35,000 ft 10,668 m	31	ALBUQUERQUE
OTO VOR	V12 AWY-LO	35.07230 -105.93600	35,000 ft 10,668 m	43	OTTO
ACH VOR	V12 AWY-LO	35.11170 -105.04000	35,000 ft 10,668 m	44	ANTON CHICO
WASBI FIX	V12 AWY-LO	35.16590 -103.96400	35,000 ft 10,668 m	52	-
TCC VOR	V12 AWY-LO	35.18220 -103.59900	35,000 ft 10,668 m	17	TUCUMCARI
JADIL FIX	V12 AWY-LO	35.19460 -103.23300	35,000 ft 10,668 m	17	-
VEGGE FIX	V12 AWY-LO	35.21980 -102.37000	35,000 ft 10,668 m	42	-
PNH VOR	V12 AWY-LO	35.23510 -101.69900	35,000 ft 10,668 m	32	PANHANDLE
GOONI FIX	V140 AWY-LO	35.24020 -101.10300	35,000 ft 10,668 m	29	-
WUDPI FIX	V140 AWY-LO	35.24230 -100.56000	35,000 ft 10,668 m	26	-
ASAZE FIX	V140 AWY-LO	35.23860 -99.39480	35,000 ft 10,668 m	57	-
BFV VOR	V140 AWY-LO	35.23690 -99.20620	35,000 ft 10,668 m	9	BURNS FLAT (CLINTON)
LIONS FIX	V272 AWY-LO	35.31710 -98.18600	35,000 ft 10,668 m	50	-
IRW VOR	V272 AWY-LO	35.35860 -97.60920	35,000 ft 10,668 m	28	WILL ROGERS (OKLAHOMA CITY)
MINGG FIX	V210 AWY-LO	35.12890 -96.95550	35,000 ft 10,668 m	34	-
HOLLE FIX	V272 AWY-LO	35.01480 -96.46970	35,000 ft 10,668 m	24	-
AKUME FIX	V272 AWY-LO	34.92950 -96.11270	35,000 ft 10,668 m	18	-
CALNA FIX	V272 AWY-LO	34.89660 -95.97660	35,000 ft 10,668 m	6	-
MLC VOR	V272 AWY-LO	34.84940 -95.78230	35,000 ft 10,668 m	9	MC ALESTER
ELKVI FIX	V272 AWY-LO	35.09780 -95.09510	32,500 ft 9,906 m	36	-
KLEEN	V272	35.19110	29,500 ft	14	-

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-LO	-94.83290	8,992 m			
FSM	V272	35.38840	23,100 ft	29		FORT SMITH
VOR	AWY-LO	-94.27150	7,041 m			
CHARR	V74	35.28700	19,600 ft	16		-
FIX	AWY-LO	-93.96420	5,974 m			
KLIT	-	34.72960	0 ft	91		Adams Field/Bill and Hillary Clinton National
APT	-	-92.22590	0 m			

KPHX

Region: UNITED STATES
Timezone: AMERICA/PHOENIX
Runways: 3

Elevation: 1,135 ft / 346 m
Location: 33.433600 -112.012000
Magnetic Var: 9.718 E

METAR

KPHX 210251Z 10006KT 10SM FEW080 FEW250 30/03 A2974 RMK A02 SLP054 T03000033 56007

TAF

KPHX 210305Z 2103/2206 10006KT P6SM SKC TEMPO 2103/2107 23006KT FM211800 24009KT P6SM SKC

Frequencies

REC - 127.57 MHz - ATIS	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 119.75 MHz - GROUND NORTH	GND - 132.55 MHz - GROUND SOUTH
TWR - 118.70 MHz - TOWER NORTH	TWR - 120.90 MHz - TOWER SOUTH
APP - 128.65 MHz - PHOENIX APPROACH	APP - 120.70 MHz - PHOENIX APPROACH
DEP - 124.10 MHz - PHOENIX APPROACH	DEP - 126.80 MHz - PHOENIX DEPARTURE
DEP - 124.90 MHz - PHOENIX DEPARTURE	DEP - 123.70 MHz - PHOENIX DEPARTURE
DEP - 119.20 MHz - PHOENIX DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	11,500 ft	90.06	CONCRETE	912 ft	0 ft
	46 m	3,505 m	80.34		278 m	0 m
26	151 ft	11,500 ft	270.08	CONCRETE	0 ft	0 ft
	46 m	3,505 m	260.36		0 m	0 m
07L	151 ft	10,308 ft	90.04	CONCRETE	0 ft	0 ft
	46 m	3,142 m	80.32		0 m	0 m
25R	151 ft	10,308 ft	270.06	CONCRETE	0 ft	0 ft
	46 m	3,142 m	260.34		0 m	0 m
07R	151 ft	7,806 ft	90.04	CONCRETE	0 ft	0 ft
	46 m	2,379 m	80.32		0 m	0 m
25L	151 ft	7,806 ft	270.05	CONCRETE	0 ft	0 ft
	46 m	2,379 m	260.33		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IPHX	111.50 MHz	18 nm	-	-	1,142 ft
				33 km	-		1,142 m
07R	DME	IAHA	110.75 MHz	18 nm	-	-	1,135 ft
				33 km	-		1,135 m
08	DME	ISYQ	111.75 MHz	18 nm	-	-	1,149 ft
				33 km	-		1,149 m
25L	DME	IRJG	110.75 MHz	18 nm	-	-	1,135 ft
				33 km	-		1,135 m
26	DME	CWJ	111.75 MHz	18 nm	-	-	1,119 ft
				33 km	-		1,119 m
07L	LOC-ILS	IPHX	111.50 MHz	18 nm	90.05	-	1,135 ft
				33 km	80.33		1,135 m
07R	LOC-ILS	IAHA	110.75 MHz	18 nm	90.04	-	1,135 ft
				33 km	80.32		1,135 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	LOC-ILS	ISYQ	111.75 MHz	18 nm 33 km	90.07 80.35	-	1,135 ft 1,135 m
25L	LOC-ILS	IRJG	110.75 MHz	18 nm 33 km	270.04 260.32	-	1,135 ft 1,135 m
26	LOC-ILS	ICWJ	111.75 MHz	18 nm 33 km	270.07 260.35	-	1,135 ft 1,135 m
07L	GS	IPHX	111.50 MHz	10 nm 19 km	90.05 80.33	3.01	1,135 ft 1,135 m
07R	GS	IAHA	110.75 MHz	10 nm 19 km	90.04 80.32	3.01	1,135 ft 1,135 m
08	GS	ISYQ	111.75 MHz	10 nm 19 km	90.70 80.98	3.01	1,135 ft 1,135 m
25L	GS	IRJG	110.75 MHz	10 nm 19 km	270.04 260.32	3.00	1,135 ft 1,135 m
26	GS	ICWJ	111.75 MHz	10 nm 19 km	270.70 260.98	3.00	1,135 ft 1,135 m

KLIT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 266 ft / 81 m
Location: 34.729600 -92.225900
Magnetic Var: 0.419 W

METAR

KLIT 210253Z 19006KT 10SM FEW250 25/19 A2986 RMK A02 SLP111 T02500189 53010

TAF

TAF KLIT 202320Z 2100/2124 17005KT P6SM SCT250 FM211500 19016G25KT P6SM FEW250

Frequencies

CLD - 118.95 MHz - ADAMS CLEARANCE DELIVERY	GND - 121.90 MHz - ADAMS GROUND
TWR - 118.70 MHz - ADAMS TOWER	REC - 125.65 MHz - ATIS
DEP - 119.50 MHz - LITTLE ROCK DEPARTURE	DEP - 135.40 MHz - LITTLE ROCK DEPARTURE
APP - 119.50 MHz - LITTLE ROCK APPROACH	APP - 135.40 MHz - LITTLE ROCK APPROACH
COM - 122.95 MHz - ADAMS UNICOM	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	151 ft	6,243 ft	181.51	CONCRETE	0 ft	0 ft
	46 m	1,903 m	181.93		0 m	0 m
36	151 ft	6,243 ft	1.51	CONCRETE	164 ft	194 ft
	46 m	1,903 m	1.93		50 m	59 m
04R	151 ft	8,259 ft	46.39	CONCRETE	1,056 ft	194 ft
	46 m	2,517 m	46.81		322 m	59 m
22L	151 ft	8,259 ft	226.40	CONCRETE	0 ft	400 ft
	46 m	2,517 m	226.82		0 m	122 m
04L	151 ft	8,282 ft	46.38	CONCRETE	305 ft	705 ft
	46 m	2,524 m	46.80		93 m	215 m
22R	151 ft	8,282 ft	226.39	CONCRETE	0 ft	200 ft
	46 m	2,524 m	226.81		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	ILIT	110.30 MHz	18 nm	-	-	265 ft
				33 km	-		265 m
04R	DME	ICNL	111.30 MHz	18 nm	-	-	254 ft
				33 km	-		254 m
22R	DME	IAAY	110.30 MHz	18 nm	-	-	265 ft
				33 km	-		265 m
04L	LOC-ILS	ILIT	110.30 MHz	18 nm	46.39	-	262 ft
				33 km	46.81		262 m
04R	LOC-ILS	ICNL	111.30 MHz	18 nm	46.39	-	262 ft
				33 km	46.81		262 m
22L	LOC-ILS	IBWY	110.70 MHz	18 nm	226.39	-	262 ft
				33 km	226.81		262 m
22R	LOC-ILS	IAAY	110.30 MHz	18 nm	226.39	-	262 ft
				33 km	226.81		262 m
04L	GS	ILIT	110.30 MHz	10 nm	46.39	3.00	262 ft
				19 km	46.81		262 m
04R	GS	ICNL	111.30 MHz	10 nm	46.39	3.00	262 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				19 km	46.81		262 m
22L	GS	IBWY	110.70 MHz	10 nm	226.39	3.00	262 ft
				19 km	226.81		262 m
22R	GS	IAAY	110.30 MHz	10 nm	226.39	3.00	262 ft
				19 km	226.81		262 m