

EDDN

Nurnberg


LIRF

Roma Fiumicino Leonardo Da Vinci

2024/05/23 0752Z

EDDN EUR T101 BZO M726 SUMIR UM726 ALBET M726 DENAL LIRF

464.96 nm / 861.11 km

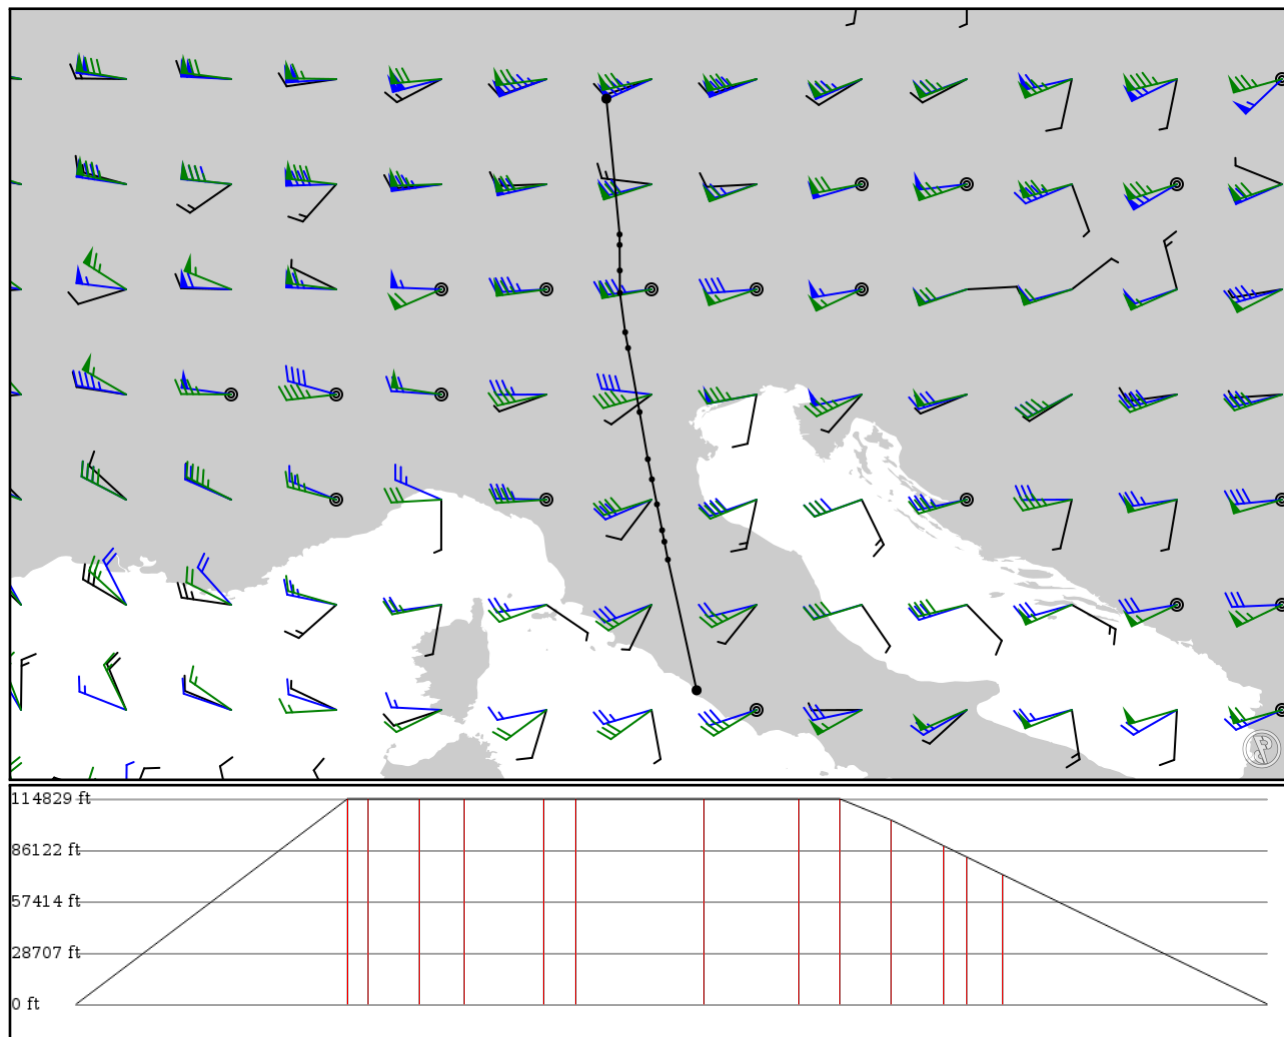

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EDDN	-	49.49874	0 ft	-	Nurnberg
APT	-	11.07758	0 m		
EUR	-	47.73499	35,000 ft	106	EURACH VOR-DME
VOR	-	11.24940	10,668 m		
OBAGA	T101	47.59861	35,000 ft	8	-
FIX	AWY-LO	11.25000	10,668 m		
NORTO	T101	47.26636	35,000 ft	19	-
FIX	AWY-LO	11.25182	10,668 m		
MATAR	T101	46.97500	35,000 ft	17	-
FIX	AWY-LO	11.25333	10,668 m		
BZO	T101	46.46389	35,000 ft	30	BOLZANO NDB
NDB	AWY-LO	11.32222	10,668 m		
SUMIR	M726	46.25889	35,000 ft	12	-
FIX	AWY-LO	11.35972	10,668 m		
ALBET	UM726	45.42667	35,000 ft	50	-
FIX	AWY-HI	11.50917	10,668 m		
FER	M726	44.81444	35,000 ft	37	FERRARA NDB
NDB	AWY-LO	11.61639	10,668 m		
ARGEX	M726	44.55250	35,000 ft	15	-
FIX	AWY-LO	11.66972	10,668 m		
PELEG	M726	44.22778	31,400 ft	19	-
FIX	AWY-LO	11.73528	9,571 m		
BAGNO	M726	43.89056	27,000 ft	20	-
FIX	AWY-LO	11.80222	8,230 m		
VERNA	M726	43.74222	25,100 ft	8	-
FIX	AWY-LO	11.83167	7,650 m		
DENAL	M726	43.50889	22,100 ft	14	-
FIX	AWY-LO	11.87722	6,736 m		
LIRF	-	41.81081	0 ft	103	Roma Fiumicino Leonardo Da Vinci
APT	-	12.25090	0 m		

EDDN

Region: GERMANY - CIVIL
Timezone: EUROPE/BERLIN
Runways: 1

Elevation: 1,043 ft / 318 m
Location: 49.498700 11.077600
Magnetic Var: 3.828 E

METAR

EDDN 230720Z AUTO VRB01KT CAVOK 18/11 Q1016 NOSIG

TAF

TAF TAF EDDN 230500Z 2306/2406 11004KT CAVOK BECMG 2306/2308 24005KT BECMG 2309/2311 30005KT BECMG 2320/2322 VRB0

Frequencies

REC - 123.08 MHz - NUERNBERG ATIS
GND - 118.10 MHz - NUERNBERG GROUND
APP - 129.53 MHz - MUENCHEN RADAR

COM - 122.80 MHz - NUERNBERG UNICOM
TWR - 118.30 MHz - NUERNBERG TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	148 ft	8,835 ft	98.58	ASPHALT	0 ft	102 ft
	45 m	2,693 m	94.76		0 m	31 m
28	148 ft	8,835 ft	278.61	ASPHALT	0 ft	108 ft
	45 m	2,693 m	274.78		0 m	33 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	LOC-ILS	INUE	109.55 MHz	18 nm	98.60	-	1,043 ft
				33 km	94.77		1,043 m
28	LOC-ILS	INUW	109.10 MHz	18 nm	278.60	-	1,043 ft
				33 km	274.77		1,043 m
10	GS	INUE	109.55 MHz	10 nm	98.60	3.00	1,043 ft
				19 km	94.77		1,043 m
28	GS	INUW	109.10 MHz	10 nm	278.60	3.00	1,043 ft
				19 km	274.77		1,043 m

LIRF

Region: ITALY
Timezone: EUROPE/ROME
Runways: 3

Elevation: 13 ft / 4 m
Location: 41.810800 12.250900
Magnetic Var: 3.669 E

METAR

LIRF 230720Z 19007KT 160V220 9999 SCT015 21/15 Q1018 NOSIG

TAF

LIRF 230500Z 2306/2412 12005KT 9999 SCT020 BECMG 2308/2310 24013KT BECMG 2318/2320 13006KT BECMG 2410/2412 23010KT

Frequencies

REC - 120.17 MHz - ATIS ARRIVAL
REC - 121.85 MHz - ATIS DEPARTURE
GND - 121.72 MHz - FIUME APRON
GND - 121.90 MHz - FIUME GROUND
TWR - 127.62 MHz - FIUME TOWER
TWR - 118.70 MHz - FIUME TOWER
DEP - 131.10 MHz - ROMA DEPARTURE
APP - 125.50 MHz - ROMA ARRIVAL
APP - 131.25 MHz - ROMA DIRECT

REC - 126.12 MHz - ATIS ARRIVAL
CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.67 MHz - FIUME GROUND
GND - 122.12 MHz - FIUME GROUND
TWR - 123.72 MHz - FIUME TOWER
DEP - 130.90 MHz - ROMA DEPARTURE
APP - 127.95 MHz - ROMA ARRIVAL
APP - 119.20 MHz - ROMA DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	10,859 ft	69.68	ASPHALT	1,348 ft	0 ft
	45 m	3,310 m	66.01		411 m	0 m
25	148 ft	10,859 ft	249.71	ASPHALT	0 ft	0 ft
	45 m	3,310 m	246.04		0 m	0 m
16R	197 ft	12,814 ft	162.66	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.00		0 m	0 m
34L	197 ft	12,814 ft	342.67	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.01		0 m	0 m
16L	197 ft	12,814 ft	162.68	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.01		0 m	0 m
34R	197 ft	12,814 ft	342.69	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.02		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	FEE	110.15 MHz	25 nm	-	-	25 ft
				46 km	-		25 m
34L	DME	ISW	108.90 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
34R	DME	FSS	111.55 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
16L	LOC-ILS	IFLL	108.10 MHz	18 nm	162.69	-	13 ft
				33 km	159.02		13 m
16R	LOC-ILS	IFRR	109.75 MHz	18 nm	162.67	-	13 ft
				33 km	159.00		13 m
25	LOC-ILS	FEE	110.15 MHz	18 nm	249.69	-	13 ft
				33 km	246.02		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34L	LOC-ILS	IFSW	108.90 MHz	18 nm	342.67	-	13 ft
				33 km	339.00		13 m
34R	LOC-ILS	FSS	111.55 MHz	18 nm	342.69	-	13 ft
				33 km	339.02		13 m
16L	GS	IFLL	108.10 MHz	10 nm	162.69	3.00	13 ft
				19 km	159.02		13 m
16R	GS	IFRR	109.75 MHz	10 nm	162.67	3.00	13 ft
				19 km	159.00		13 m
25	GS	FEE	110.15 MHz	10 nm	249.69	3.00	13 ft
				19 km	246.02		13 m
34L	GS	IFSW	108.90 MHz	10 nm	342.67	3.00	13 ft
				19 km	339.00		13 m
34R	GS	FSS	111.55 MHz	10 nm	342.69	3.00	13 ft
				19 km	339.02		13 m