

NFFN

Nadi Intl


PHNL

Daniel K. Inouye International Airport

2024/05/02 0942Z

NFFN KABAR **A579** CARRP JUSSS PHNL

2783.13 nm / 5154.35 km

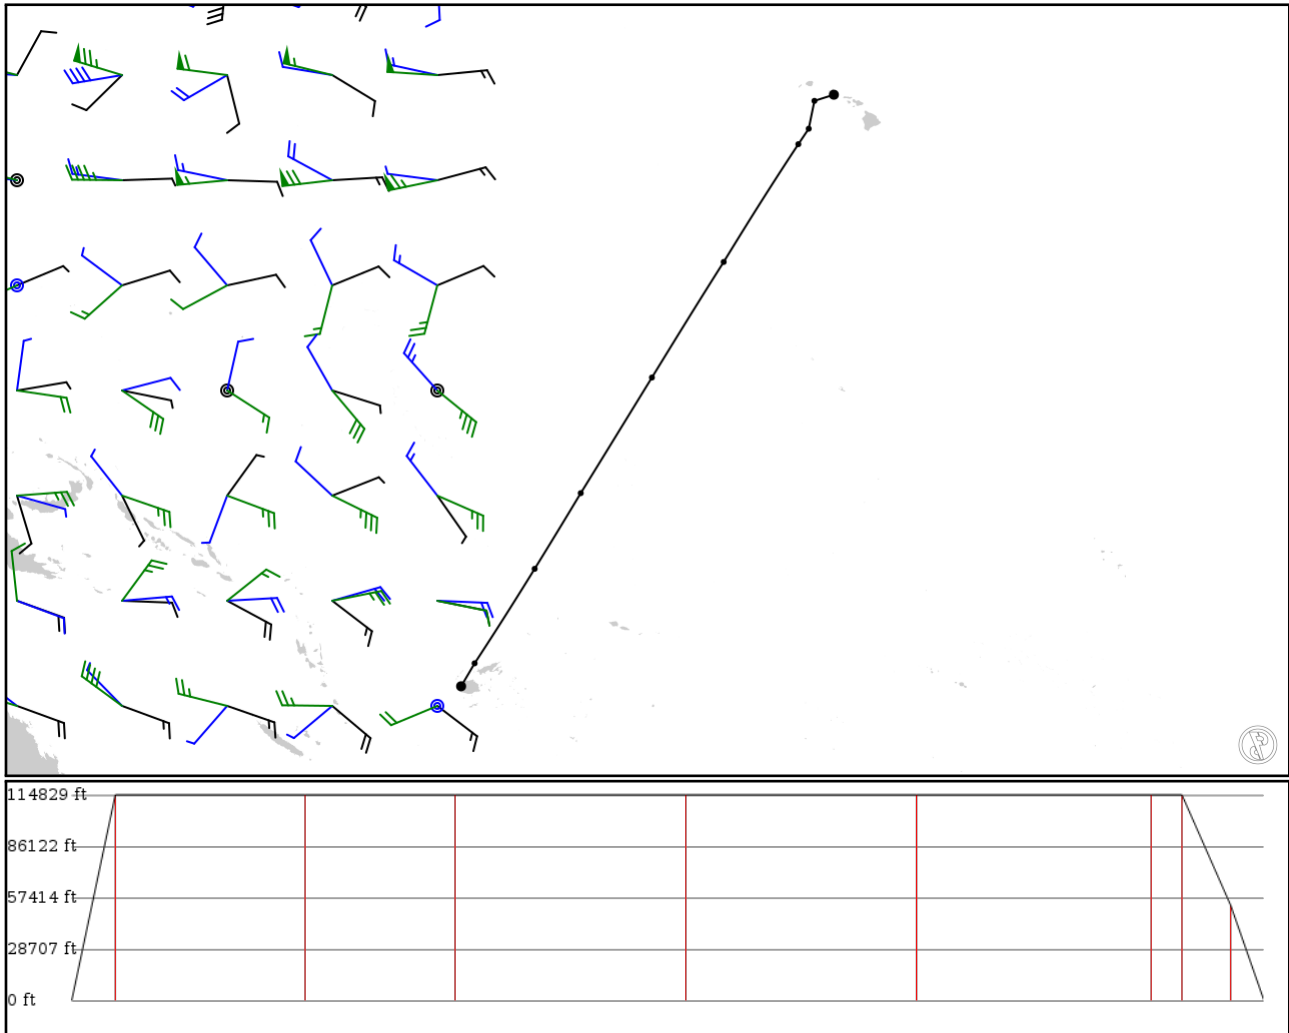

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
NFFN	-	-17.75860	0 ft	-	Nadi Intl	
APT	-	177.44200	0 m			
KABAR	-	-16.24170	35,000 ft	104	-	
FIX	-	178.33500	10,668 m			
IDEMU	A579	-10.00000	35,000 ft	440	-	
FIX	AWY-HI	-177.69700	10,668 m			
CUFFY	A579	-5.00000	35,000 ft	350	-	
FIX	AWY-HI	-174.65100	10,668 m			
CEBUR	A579	2.63778	35,000 ft	538	-	
FIX	AWY-HI	-169.94700	10,668 m			
CROBY	A579	10.27170	35,000 ft	538	-	
FIX	AWY-HI	-165.20400	10,668 m			
CHEEM	A579	18.05250	35,000 ft	548	-	
FIX	AWY-HI	-160.27000	10,668 m			
CARRP	A579	19.07330	35,000 ft	72	-	
FIX	AWY-HI	-159.58300	10,668 m			
JUSSS	-	20.91400	16,200 ft	112	-	
FIX	-	-159.20600	4,938 m			
PHNL	-	21.31940	0 ft	75	Daniel K. Inouye International Airport	
APT	-	-157.92100	0 m			

NFFN

Region: FIJI AND TONGA
Timezone: PACIFIC/FIJI
Runways: 2

Elevation: 59 ft / 18 m
Location: -17.758600 177.442000
Magnetic Var: 12.670 E

METAR

NFFN 020900Z 20006KT 9999 FEW018CB SCT025TCU BKN045 26/25 Q1011 TEMPO 5000 TSRA

TAF

TAF AMD NFFN 020856Z 0209/0306 14005KT 9999 -SHRA SCT020 BKN045 PROB30 TEMPO 0209/0212 5000 TSRA FEW017CB BECMG 02

Frequencies

REC - 127.90 MHz - NADI ATIS
TWR - 119.10 MHz - NADI TOWER

GND - 118.10 MHz - NADI GROUND
APP - 119.10 MHz - NADI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	10,816 ft	37.49	ASPHALT	279 ft	0 ft
	45 m	3,297 m	24.82		85 m	0 m
20	148 ft	10,816 ft	217.49	ASPHALT	0 ft	115 ft
	45 m	3,297 m	204.82		0 m	35 m
09	148 ft	6,996 ft	104.17	ASPHALT	0 ft	102 ft
	45 m	2,132 m	91.50		0 m	31 m
27	148 ft	6,996 ft	284.17	ASPHALT	0 ft	0 ft
	45 m	2,132 m	271.50		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02	LOC-ILS	INN	109.90 MHz	18 nm	37.49	-	41 ft
				33 km	24.82		41 m
02	GS	INN	109.90 MHz	10 nm	38.00	3.00	59 ft
				19 km	25.33		59 m

PHNL

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 4

Elevation: 13 ft / 4 m
Location: 21.319400 -157.921000
Magnetic Var: 9.260 E

METAR

PHNL 020853Z 05009KT 10SM FEW024 FEW045 24/18 A3005

TAF

PHNL 020929Z 0209/0312 06010KT P6SM FEW025 SCT060 FM022000 06016G24KT P6SM SCT030 SCT060 FM030600 06011KT P6SM SC

Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.58		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.75		0 m	212 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m