

WIMM

Kualanamu Int'l


WIDD

Batam Hang Nadim

2024/05/12 1524Z

WIMM AMVIL **N563** SALAX **A576** REKOP WIDD

350.23 nm / 648.63 km

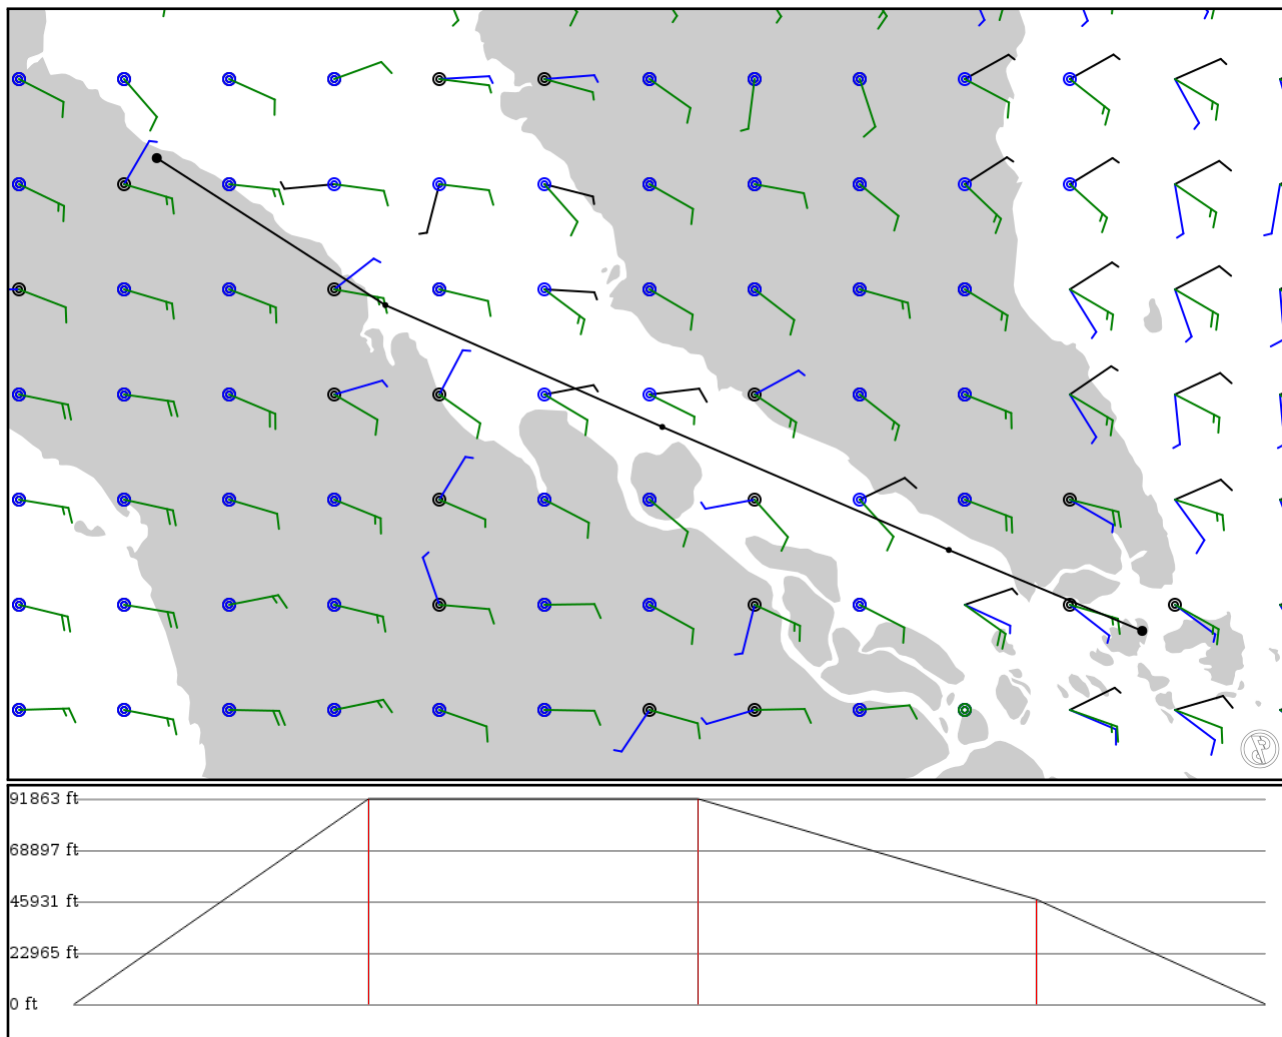

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 28000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WIMM	-	3.63782	0 ft	-	Kualanamu Int'l
APT	-	98.87060	0 m		
AMVIL	-	2.85500	28,000 ft	86	-
FIX	-	100.08800	8,534 m		
SALAX	N563	2.20670	28,000 ft	96	-
FIX	AWY-HI	101.56300	8,534 m		
REKOP	A576	1.55170	14,300 ft	99	-
FIX	AWY-HI	103.08900	4,359 m		
WIDD	-	1.12095	0 ft	67	Batam Hang Nadim
APT	-	104.11900	0 m		

WIMM

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 1

Elevation: 22 ft / 7 m
Location: 3.637820 98.870600
Magnetic Var: 0.143 W

METAR

WIMM 121430Z 22003KT 7000 FEW018 29/27 Q1009 NOSIG

TAF

TAF WIMM 121100Z 1212/1312 VRB05KT 4000 HZ SCT017 TEMPO 1218/1221 -TSRA FEW016CB BECMG 1301/1303 06010KT 9999 FEW018

Frequencies

REC - 126.30 MHz - MEDAN ATIS
GND - 130.30 MHz - KUALANAMU GROUND

TWR - 118.60 MHz - KUALANAMU TOWER
APP - 119.70 MHz - MEDAN DIRECTOR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	197 ft	12,315 ft	44.84	ASPHALT	0 ft	197 ft
	60 m	3,754 m	44.99		0 m	60 m
23	197 ft	12,315 ft	224.84	ASPHALT	0 ft	197 ft
	60 m	3,754 m	224.99		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	IMDN	110.10 MHz	18 nm	47.68	-	90 ft
				33 km	47.82		90 m
05	LOC-ILS	IDES	109.30 MHz	18 nm	44.84	-	22 ft
				33 km	44.98		22 m
23	LOC-ILS	IDEL	110.90 MHz	18 nm	224.84	-	22 ft
				33 km	224.98		22 m
05	GS	IDES	109.30 MHz	10 nm	44.84	3.00	22 ft
				19 km	44.98		22 m
23	GS	IDEL	110.90 MHz	10 nm	224.84	3.00	22 ft
				19 km	224.98		22 m
05	GS	IMDN	110.10 MHz	10 nm	47.09	3.00	90 ft
				19 km	47.24		90 m

WIDD

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 1

Elevation: 123 ft / 37 m
Location: 1.120950 104.119000
Magnetic Var: 0.213 E

METAR

WIDD 121430Z 11003KT 9999 FEW014 28/26 Q1011 NOSIG

TAF

TAF WIDD 121100Z 1212/1312 17006KT 9000 SCT014 TEMPO 1216/1219 3000 TSRA FEW013CB

Frequencies

REC - 126.25 MHz - ATIS	GND - 121.95 MHz - HANG NADIM GROUND
TWR - 118.30 MHz - HANG NADIM TOWER	TWR - 118.70 MHz - HANG NADIM TOWER
APP - 130.20 MHz - TANJUNG PINANG APPROACH	APP - 120.30 MHz - SINGAPORE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	148 ft	13,258 ft	41.35	ASPHALT	0 ft	207 ft
	45 m	4,041 m	41.14		0 m	63 m
22	148 ft	13,258 ft	221.35	ASPHALT	0 ft	190 ft
	45 m	4,041 m	221.14		0 m	58 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	IBTM	110.10 MHz	18 nm	-	-	69 ft
				33 km	-		69 m
04	LOC-ILS	IBTM	110.10 MHz	18 nm	41.35	-	123 ft
				33 km	41.14		123 m
04	GS	IBTM	110.10 MHz	10 nm	41.35	3.00	123 ft
				19 km	41.14		123 m