

HLLT

TRIPOLI INTL


LIRF

Roma Fiumicino Leonardo Da Vinci

2024/06/06 0426Z

HLLT ABRAM **M727** LPD **Q727** ASBOL **UM727** GIANO **M727** ROTUN LIRF

552.93 nm / 1024.03 km

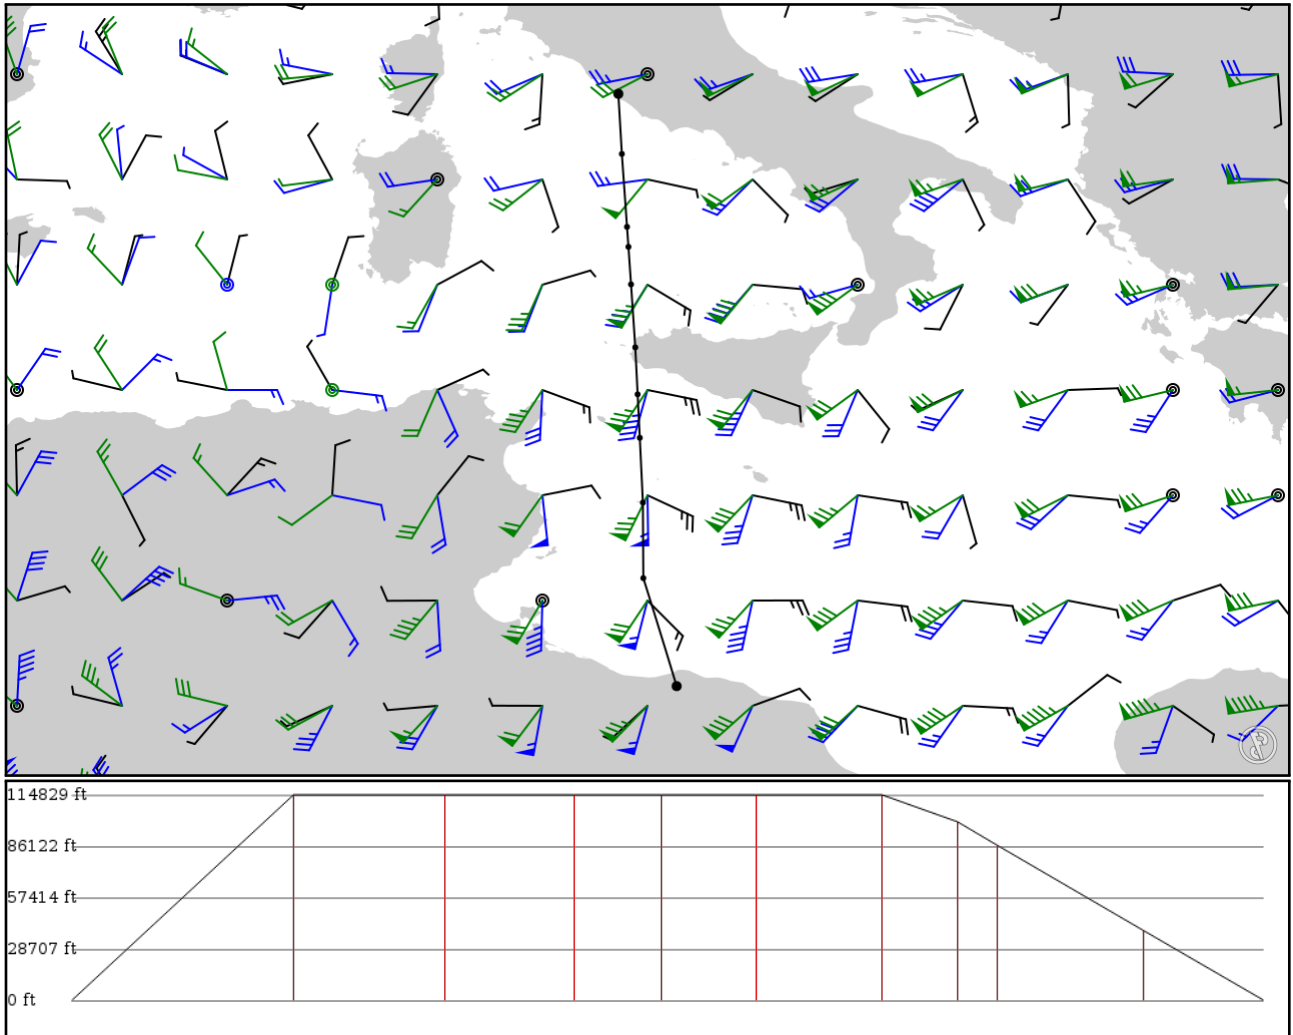

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
HLLT	-	32.66566	0 ft	-	TRIPOLI INTL
APT	-	13.15336	0 m		
ABRAM	-	34.33333	35,000 ft	103	-
FIX	-	12.63778	10,668 m		
LPD	M727	35.49971	35,000 ft	70	LAMPEDUSA VOR-DME
VOR	AWY-LO	12.63083	10,668 m		
KOLEX	Q727	36.50000	35,000 ft	60	-
FIX	AWY-LO	12.58306	10,668 m		
ASBOL	Q727	37.17139	35,000 ft	40	-
FIX	AWY-LO	12.54972	10,668 m		
TRP	UM727	37.89609	35,000 ft	43	TRAPANI VORTAC
VOR	AWY-HI	12.51333	10,668 m		
GIANO	UM727	38.86917	35,000 ft	58	-
FIX	AWY-HI	12.44750	10,668 m		
UVETO	M727	39.44861	30,400 ft	34	-
FIX	AWY-LO	12.40750	9,266 m		
CORAD	M727	39.75694	26,400 ft	18	-
FIX	AWY-LO	12.38528	8,047 m		
ROTUN	M727	40.88333	11,900 ft	67	-
FIX	AWY-LO	12.30556	3,627 m		
LIRF	-	41.81081	0 ft	55	Roma Fiumicino Leonardo Da Vinci
APT	-	12.25090	0 m		

HLLT

Region: LIBYA

Timezone: AFRICA/TRIPOLI

Runways: 2

Elevation: 263 ft / 80 m

Location: 32.665700 13.153500

Magnetic Var: 3.194 E

METAR

UNKNOWN

TAF

UNKNOWN

Frequencies

REC - 127.00 MHz - TRIPOLI ATIS

TWR - 118.10 MHz - TRIPOLI TOWER

GND - 120.10 MHz - TRIPOLI GROUND

APP - 124.00 MHz - TRIPOLI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	148 ft	11,794 ft	88.98	CONCRETE	0 ft	197 ft
	45 m	3,595 m	85.79		0 m	60 m
27	148 ft	11,794 ft	269.00	CONCRETE	0 ft	197 ft
	45 m	3,595 m	265.81		0 m	60 m
18	148 ft	8,654 ft	177.16	CONCRETE	0 ft	89 ft
	45 m	2,638 m	173.97		0 m	27 m
36	148 ft	8,654 ft	357.16	CONCRETE	377 ft	0 ft
	45 m	2,638 m	353.97		115 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
27	LOC-ILS	IIWT	109.50 MHz	18 nm	268.99	-	263 ft
				33 km	265.80		263 m
27	GS	IIWT	109.50 MHz	10 nm	268.99	3.00	263 ft
				19 km	265.80		263 m

LIRF

Region: ITALY
Timezone: EUROPE/ROME
Runways: 3

Elevation: 13 ft / 4 m
Location: 41.810800 12.250900
Magnetic Var: 3.673 E

METAR

LIRF 060350Z 34003KT CAVOK 14/12 Q1017 NOSIG

TAF

TAF LIRF 052300Z 0600/0706 01006KT CAVOK BECMG 0608/0610 30017KT BECMG 0620/0622 03006KT

Frequencies

REC - 120.17 MHz - ATIS ARRIVAL
REC - 121.85 MHz - ATIS DEPARTURE
GND - 121.72 MHz - FIUME APRON
GND - 121.90 MHz - FIUME GROUND
TWR - 127.62 MHz - FIUME TOWER
TWR - 118.70 MHz - FIUME TOWER
DEP - 131.10 MHz - ROMA DEPARTURE
APP - 125.50 MHz - ROMA ARRIVAL
APP - 131.25 MHz - ROMA DIRECT

REC - 126.12 MHz - ATIS ARRIVAL
CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.67 MHz - FIUME GROUND
GND - 122.12 MHz - FIUME GROUND
TWR - 123.72 MHz - FIUME TOWER
DEP - 130.90 MHz - ROMA DEPARTURE
APP - 127.95 MHz - ROMA ARRIVAL
APP - 119.20 MHz - ROMA DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	10,859 ft	69.68	ASPHALT	1,348 ft	0 ft
	45 m	3,310 m	66.01		411 m	0 m
25	148 ft	10,859 ft	249.71	ASPHALT	0 ft	0 ft
	45 m	3,310 m	246.03		0 m	0 m
16R	197 ft	12,814 ft	162.66	ASPHALT	0 ft	0 ft
	60 m	3,906 m	158.99		0 m	0 m
34L	197 ft	12,814 ft	342.67	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.00		0 m	0 m
16L	197 ft	12,814 ft	162.68	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.01		0 m	0 m
34R	197 ft	12,814 ft	342.69	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.02		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	FEE	110.15 MHz	25 nm	-	-	25 ft
				46 km	-		25 m
34L	DME	ISW	108.90 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
34R	DME	FSS	111.55 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
16L	LOC-ILS	IFLL	108.10 MHz	18 nm	162.69	-	13 ft
				33 km	159.02		13 m
16R	LOC-ILS	IFRR	109.75 MHz	18 nm	162.67	-	13 ft
				33 km	159.00		13 m
25	LOC-ILS	FEE	110.15 MHz	18 nm	249.69	-	13 ft
				33 km	246.02		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34L	LOC-ILS	IFSW	108.90 MHz	18 nm	342.67	-	13 ft
				33 km	339.00		13 m
34R	LOC-ILS	FSS	111.55 MHz	18 nm	342.69	-	13 ft
				33 km	339.02		13 m
16L	GS	IFLL	108.10 MHz	10 nm	162.69	3.00	13 ft
				19 km	159.02		13 m
16R	GS	IFRR	109.75 MHz	10 nm	162.67	3.00	13 ft
				19 km	159.00		13 m
25	GS	FEE	110.15 MHz	10 nm	249.69	3.00	13 ft
				19 km	246.02		13 m
34L	GS	IFSW	108.90 MHz	10 nm	342.67	3.00	13 ft
				19 km	339.00		13 m
34R	GS	FSS	111.55 MHz	10 nm	342.69	3.00	13 ft
				19 km	339.02		13 m