

LEZL

Sevilla-San Pablo


LPFR

Faro

2024/04/28 0719Z

LEZL MINTA LPFR

102.34 nm / 189.53 km

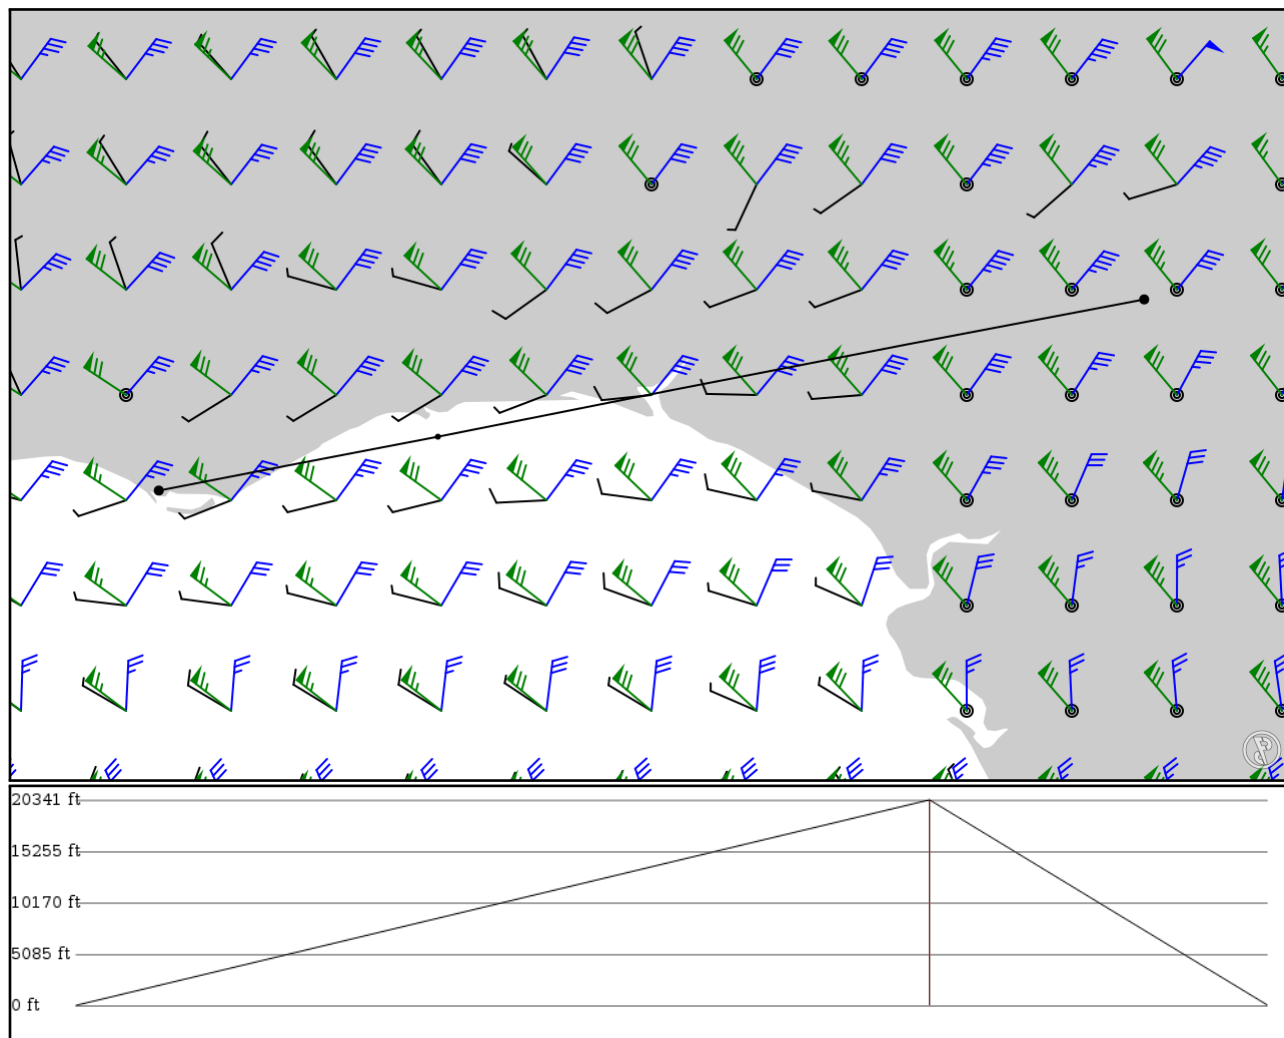

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LEZL	-	37.41790	0 ft	-	Sevilla-San Pablo
APT	-	-5.89309	0 m		
MINTA	-	37.12880	6,200 ft	73	-
FIX	-	-7.38333	1,890 m		
LPFR	-	37.01530	0 ft	29	Faro
APT	-	-7.97232	0 m		

LEZL

Region: SPAIN
Timezone: EUROPE/MADRID
Runways: 1

Elevation: 110 ft / 34 m
Location: 37.417900 -5.893090
Magnetic Var: 0.555 W

METAR

LEZL 280700Z 01003KT 320V050 CAVOK 11/07 Q1012 NOSIG

TAF

TAF LEZL 280200Z 2803/2903 VRB02KT 9999 FEW040 TX21/2815Z TN09/2806Z BECMG 2812/2814 28010KT BECMG 2821/2823 VRB0

Frequencies

REC - 118.17 MHz - ATIS
GND - 121.70 MHz - SEVILLA GROUND
APP - 124.72 MHz - SEVILLA APPROACH
TWR - 118.10 MHz - SEVILLA TOWER
APP - 120.80 MHz - SEVILLA APPROACH
APP - 128.50 MHz - SEVILLA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	148 ft	11,008 ft	89.75	ASPHALT	0 ft	164 ft
	45 m	3,355 m	90.30		0 m	50 m
27	148 ft	11,008 ft	269.77	ASPHALT	0 ft	171 ft
	45 m	3,355 m	270.33		0 m	52 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09	DME	ISE	111.10 MHz	18 nm	-	-	102 ft
				33 km	-		102 m
27	DME	ISV	110.10 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
09	LOC-ILS	ISE	111.10 MHz	18 nm	89.77	-	111 ft
				33 km	90.33		111 m
27	LOC-ILS	ISV	110.10 MHz	18 nm	269.74	-	111 ft
				33 km	270.30		111 m
09	GS	ISE	111.10 MHz	10 nm	90.51	3.00	111 ft
				19 km	91.07		111 m
27	GS	ISV	110.10 MHz	10 nm	270.51	3.00	22 ft
				19 km	271.07		22 m

LPFR

Region: PORTUGAL
Timezone: EUROPE/LISBON
Runways: 1

Elevation: 22 ft / 7 m
Location: 37.015300 -7.972320
Magnetic Var: 1.179 W

METAR

LPFR 280700Z 03002KT CAVOK 12/09 Q1013

TAF

TAF LPFR 280500Z 2806/2906 31008KT CAVOK BECMG 2809/2811 26015KT 9999 FEW025 PROB30 TEMPO 2812/2816 25017G27KT FE

Frequencies

REC - 124.20 MHz - ATIS
TWR - 120.75 MHz -

GND - 118.57 MHz -
APP - 119.40 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	148 ft	8,179 ft	100.08	ASPHALT	148 ft	0 ft
	45 m	2,493 m	101.26		45 m	0 m
28	148 ft	8,179 ft	280.09	ASPHALT	144 ft	0 ft
	45 m	2,493 m	281.27		44 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	DME	IIF	109.50 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28	LOC-ILS	IIF	109.50 MHz	18 nm	280.08	-	22 ft
				33 km	281.26		22 m
28	GS	IIF	109.50 MHz	10 nm	280.17	3.00	24 ft
				19 km	281.35		24 m