


2024/06/05 0819Z

RJ00 GUJYO Y13 BASIN RJSK

374.85 nm / 694.22 km

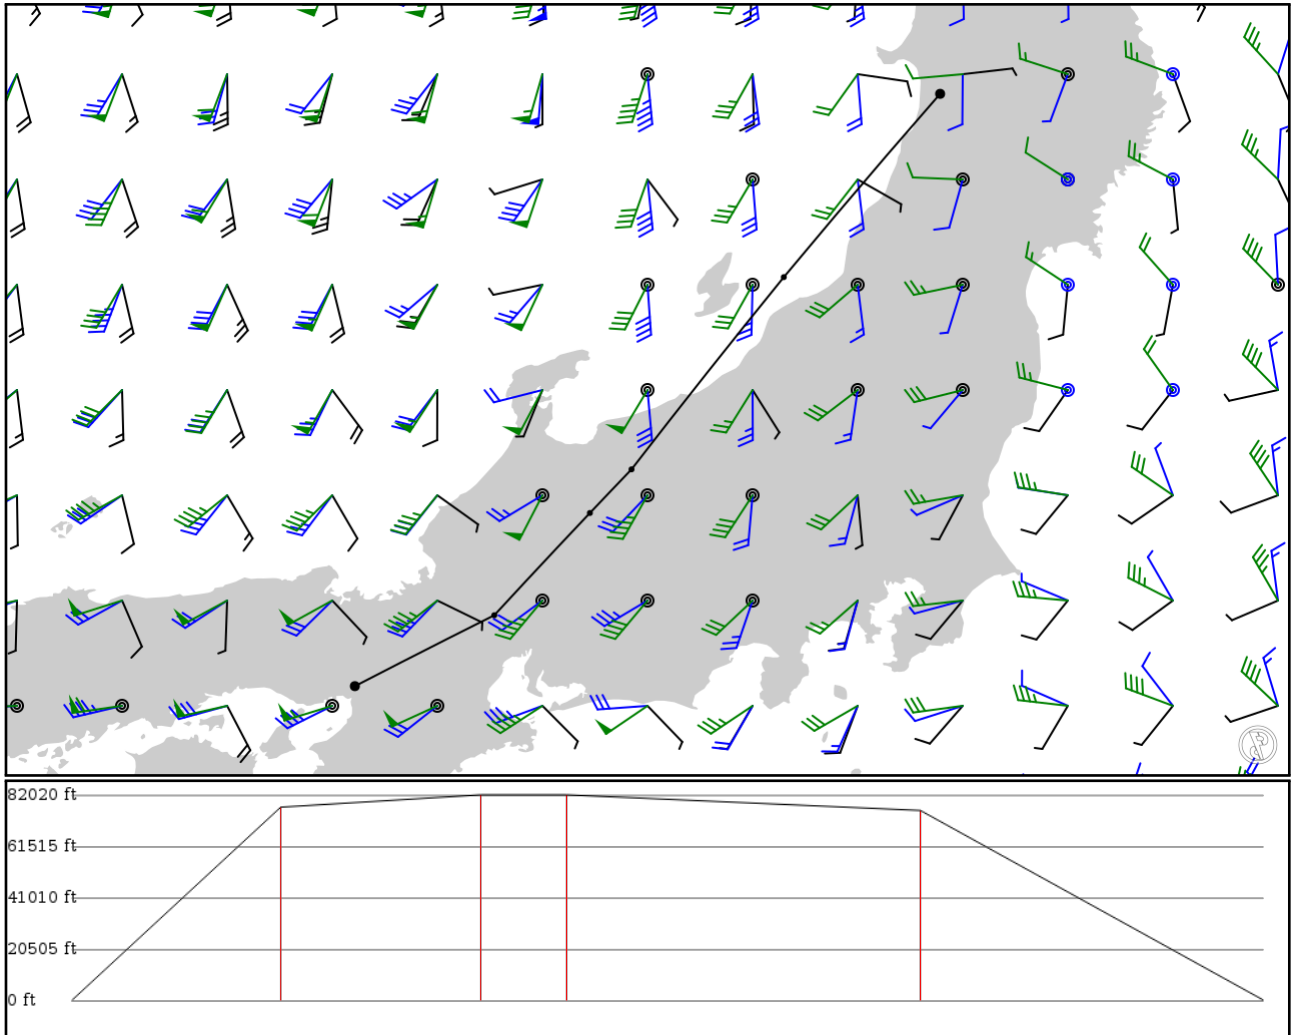

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 25000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJ00	-	34.78560	0 ft	-	Osaka Intl
APT	-	135.43800	0 m		
GUJYO	-	35.36400	23,500 ft	65	-
FIX	-	136.57700	7,163 m		
GOHEI	Y13	36.19770	25,000 ft	62	-
FIX	AWY-HI	137.35800	7,620 m		
KROBE	Y13	36.55360	25,000 ft	26	-
FIX	AWY-HI	137.69800	7,620 m		
BASIN	Y13	38.12100	23,100 ft	111	-
FIX	AWY-HI	138.94200	7,041 m		
RJSK	-	39.61560	0 ft	107	AKITA
APT	-	140.21900	0 m		

RJ00

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 39 ft / 12 m
Location: 34.785600 135.438000
Magnetic Var: 8.115 W

METAR

RJ00 050800Z 33012KT 9999 FEW030 SCT/// 27/13 Q1016 RMK 1CU030 A3000

TAF

TAF RJ00 050505Z 0506/0612 35009KT 9999 FEW030 BECMG 0521/0600 22006KT

Frequencies

CLD - 118.80 MHz - OSAKA DELIVERY	GND - 121.70 MHz - OSAKA GROUND
TWR - 118.10 MHz - OSAKA TOWER	DEP - 119.50 MHz - KANSAI DEPARTURE
APP - 120.45 MHz - KANSAI APPROACH	REC - 128.60 MHz - OSAKA ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14R	200 ft	9,846 ft	135.14	ASPHALT	128 ft	213 ft
	61 m	3,001 m	143.26		39 m	65 m
32L	200 ft	9,846 ft	315.15	ASPHALT	125 ft	249 ft
	61 m	3,001 m	323.27		38 m	76 m
14L	143 ft	5,995 ft	135.18	ASPHALT	128 ft	679 ft
	44 m	1,827 m	143.29		39 m	207 m
32R	143 ft	5,995 ft	315.18	ASPHALT	118 ft	571 ft
	44 m	1,827 m	323.30		36 m	174 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
32L	LOC-ILS	ISK	110.10 MHz	18 nm	315.13	-	50 ft
				33 km	323.25		50 m
32L	GS	ISK	110.10 MHz	10 nm	315.28	3.00	54 ft
				19 km	323.40		54 m

RJSK

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 1

Elevation: 312 ft / 95 m
Location: 39.615600 140.219000
Magnetic Var: 8.989 W

METAR

RJSK 050800Z 28011KT 9999 FEW020 BKN035 16/12 Q1019

TAF

TAF RJSK 050505Z 0506/0612 28014KT 9999 FEW010 BKN015 BECMG 0513/0515 13004KT TEMPO 0515/0521 FEW005 BKN008 BECMG

Frequencies

REC - 127.10 MHz - SAPPORO INFO
TWR - 118.60 MHz -

TWR - 126.20 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	197 ft 60 m	8,184 ft 2,494 m	96.62 105.61	ASPHALT	0 ft 0 m	200 ft 61 m
28	197 ft 60 m	8,184 ft 2,494 m	276.64 285.63	ASPHALT	0 ft 0 m	200 ft 61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	DME	IUW	108.90 MHz	18 nm 33 km	- -	-	328 ft 328 m
28	LOC-ILS	IUW	108.90 MHz	18 nm 33 km	276.62 285.61	-	286 ft 286 m
28	GS	IUW	108.90 MHz	10 nm 19 km	277.26 286.25	3.00	300 ft 300 m