


2024/05/15 0637Z

LFST GILIR LFLL

198.17 nm / 367.01 km

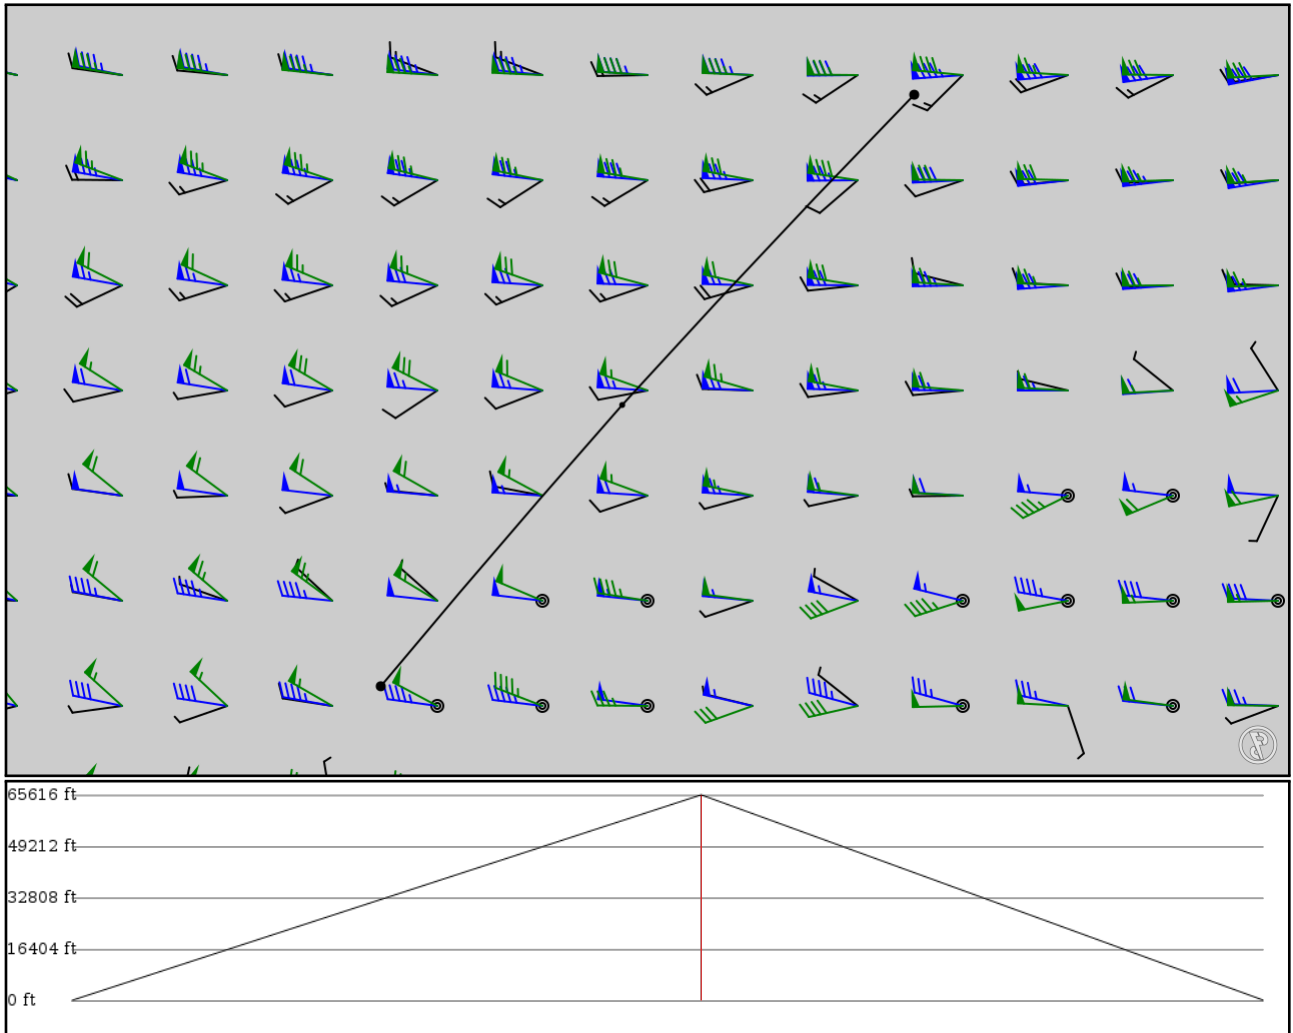

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFST	-	48.53830	0 ft	-	Entzheim
APT	-	7.62826	0 m		
GILIR	-	47.06330	20,000 ft	104	-
FIX	-	6.23917	6,096 m		
LFLL	-	45.72580	0 ft	93	Lyon Saint Exupery
APT	-	5.09073	0 m		

LFST

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 1

Elevation: 504 ft / 154 m
Location: 48.538300 7.628260
Magnetic Var: 2.911 E

METAR

LFST 150600Z AUTO 18003KT 140V210 9999 BKN039 OVC045 14/13 Q1007 NOSIG

TAF

TAF LFST 150500Z 1506/1606 VRB03KT 9999 BKN040 TEMPO 1506/1510 -RA TEMPO 1510/1523 -RA FEW020CB PROB40 TEMPO 1519/

Frequencies

REC - 126.92 MHz - LFST ATIS
TWR - 126.87 MHz - STRASBOURG TWR
APP - 119.57 MHz - STRASBOURG APP
GND - 121.80 MHz - STRASBOURG GND
APP - 119.45 MHz - STRASBOURG APP
APP - 120.70 MHz - STRASBOURG APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	148 ft	7,899 ft	48.60	ASPHALT	0 ft	860 ft
	45 m	2,408 m	45.69		0 m	262 m
23	148 ft	7,899 ft	228.62	ASPHALT	0 ft	902 ft
	45 m	2,408 m	225.71		0 m	275 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	DME	ENT	108.55 MHz	18 nm	-	-	504 ft
				33 km	-		504 m
23	DME	STZ	109.55 MHz	18 nm	-	-	504 ft
				33 km	-		504 m
05	LOC-ILS	ENT	108.55 MHz	18 nm	48.63	-	499 ft
				33 km	45.72		499 m
23	LOC-ILS	STZ	109.55 MHz	18 nm	228.59	-	515 ft
				33 km	225.68		515 m
05	GS	ENT	108.55 MHz	10 nm	49.22	3.50	561 ft
				19 km	46.31		561 m
23	GS	STZ	109.55 MHz	10 nm	229.22	3.00	542 ft
				19 km	226.31		542 m

LFL

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 2

Elevation: 817 ft / 249 m
Location: 45.725800 5.090730
Magnetic Var: 2.260 E

METAR

LFL 150600Z 30005KT 280V340 7000 -RA FEW005 SCT018 BKN026 FEW030TCU 12/12 Q1007 NOSIG

TAF

TAF LFL 150500Z 1506/1612 30005KT 9999 SCT006 BKN040 TEMPO 1506/1512 4000 -RA BKN005 PROB40 TEMPO 1506/1508 RA BKN005

Frequencies

REC - 126.17 MHz - SAINT EXUPERY ATIS	CLD - 121.65 MHz - SAINT EXUPERY DELIVERY
GND - 121.82 MHz - SAINT EXUPERY GROUND	TWR - 120.45 MHz - SAINT EXUPERY TOWER
APP - 120.22 MHz - LYON APPROACH	APP - 125.42 MHz - LYON APPROACH
APP - 125.80 MHz - LYON APPROACH	APP - 133.15 MHz - LYON APPROACH
APP - 136.07 MHz - LYON APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	145 ft	13,135 ft	175.14	ASPHALT	0 ft	190 ft
	44 m	4,003 m	172.88		0 m	58 m
35L	145 ft	13,135 ft	355.14	ASPHALT	0 ft	184 ft
	44 m	4,003 m	352.89		0 m	56 m
17L	148 ft	8,766 ft	175.14	ASPHALT	0 ft	59 ft
	45 m	2,672 m	172.88		0 m	18 m
35R	148 ft	8,766 ft	355.14	ASPHALT	0 ft	62 ft
	45 m	2,672 m	352.88		0 m	19 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	LSS	109.10 MHz	18 nm	-	-	775 ft
				33 km	-		775 m
35L	DME	SAN	110.75 MHz	18 nm	-	-	810 ft
				33 km	-		810 m
35R	DME	LSN	111.50 MHz	18 nm	-	-	812 ft
				33 km	-		812 m
17L	LOC-ILS	LSS	109.10 MHz	18 nm	175.14	-	818 ft
				33 km	172.88		818 m
35L	LOC-ILS	SAN	110.75 MHz	18 nm	355.15	-	818 ft
				33 km	352.89		818 m
35R	LOC-ILS	LSN	111.50 MHz	18 nm	355.14	-	818 ft
				33 km	352.88		818 m
17L	GS	LSS	109.10 MHz	10 nm	175.14	3.00	818 ft
				19 km	172.88		818 m
35L	GS	SAN	110.75 MHz	10 nm	355.15	3.00	818 ft
				19 km	352.89		818 m
35R	GS	LSN	111.50 MHz	10 nm	355.14	3.00	818 ft
				19 km	352.88		818 m