

6V5

Bison Muni


KSEA

Seattle-Tacoma Intl

2024/05/23 0227Z

6V5 DIXLE V120 LWT J70 EPH V120 OZALI KSEA

831.53 nm / 1539.99 km

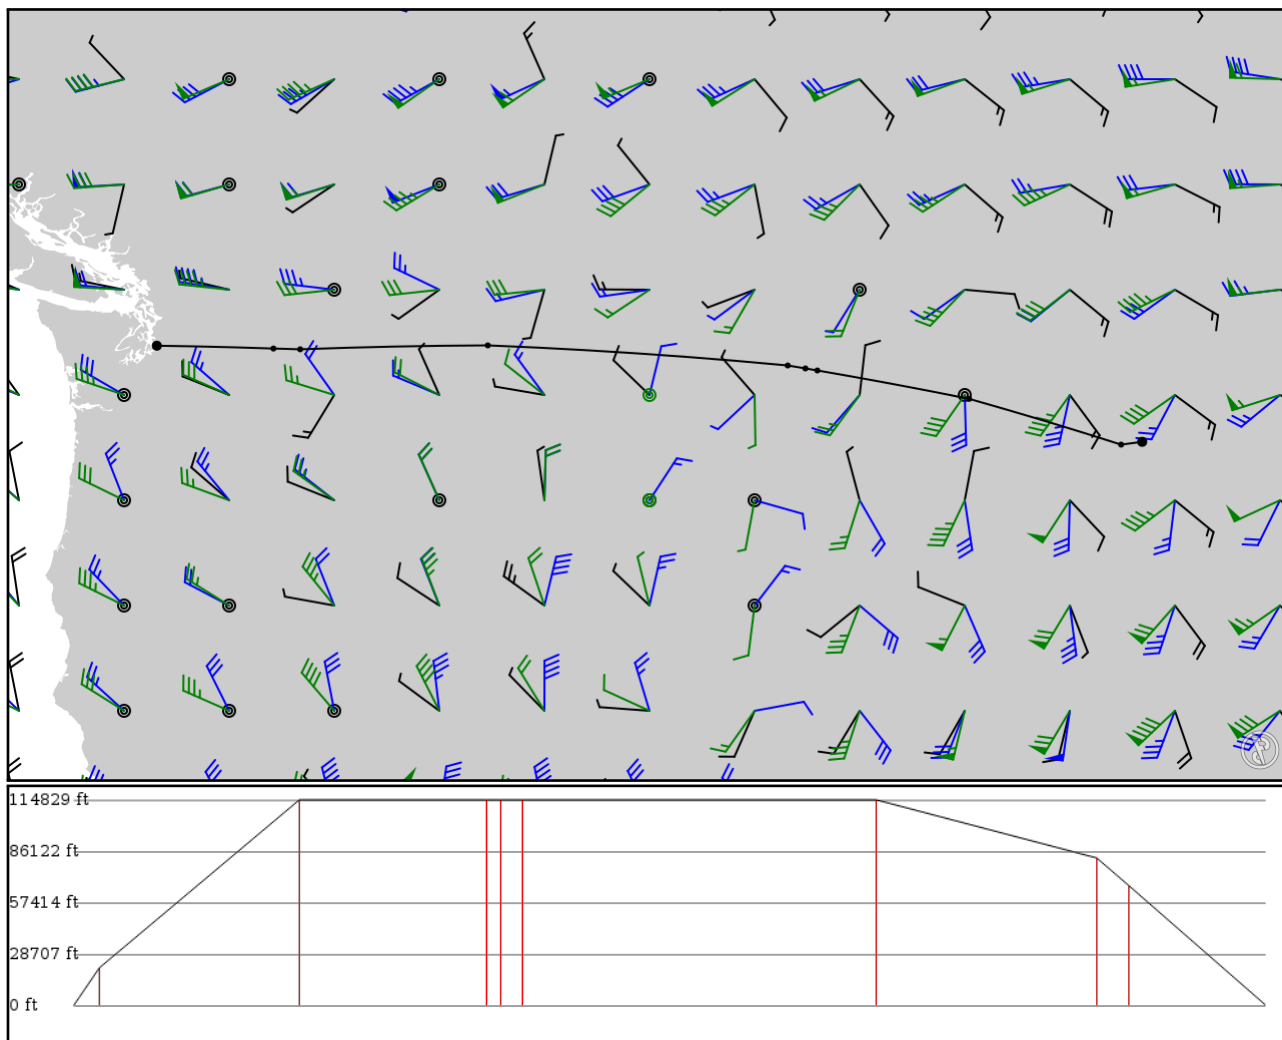

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
6V5 APT	- -	45.51830 -102.46800	0 ft 0 m	-	Bison Muni
DIXLE FIX	- -	45.46230 -102.89200	6,400 ft 1,951 m	18	-
MLS VOR	V120 AWY-LO	46.38220 -105.95400	35,000 ft 10,668 m	139	MILES CITY
ESTRO FIX	V120 AWY-LO	46.95260 -109.01000	35,000 ft 10,668 m	130	-
CIWXU FIX	V120 AWY-LO	46.99360 -109.25100	35,000 ft 10,668 m	10	-
LWT VOR	V120 AWY-LO	47.05300 -109.60600	35,000 ft 10,668 m	14	LEWISTOWN
MLP VOR	J70 AWY-HI	47.45690 -115.64600	35,000 ft 10,668 m	247	MULLAN PASS
EPH VOR	J70 AWY-HI	47.37790 -119.42400	25,100 ft 7,650 m	153	EPHRATA
OZALI FIX	V120 AWY-LO	47.39340 -119.96300	20,400 ft 6,218 m	21	-
KSEA APT	- -	47.45020 -122.31200	0 ft 0 m	95	Seattle-Tacoma Intl

KSEA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 432 ft / 132 m
Location: 47.450200 -122.312000
Magnetic Var: 14.769 E

METAR

KSEA 230153Z 28005KT 10SM FEW039 BKN070 BKN250 14/05 A3004 RMK A02 SLP177 T01390050

TAF

TAF KSEA 222326Z 2300/2406 34010KT P6SM SCT030 BKN060 FM230200 VRB04KT P6SM SCT030 BKN060 FM230500 20004KT P6SM B

Frequencies

REC - 118.00 MHz - SEATTLE ATIS
GND - 121.70 MHz - SEATTLE GROUND
TWR - 120.95 MHz - SEATTLE TOWER
DEP - 120.10 MHz - SEATTLE DEPARTURE
CLD - 128.00 MHz - SEATTLE CLEARANCE
TWR - 119.90 MHz - SEATTLE TOWER
APP - 133.65 MHz - SEATTLE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.58		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.58		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.57		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.57		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.57		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.57		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IB EJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.57		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.57		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.57		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.57		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.57		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.57		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.90		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.92		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.90		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.90		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.90		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.92		355 m