

# LIPE

Bologna-Borgo Panigale "Guglielmo Marconi"


# LIPR

Rimini-Miramare "Federico Fellini"

2024/06/05 1309Z

LIPE BOA LIPR

64.85 nm / 120.10 km

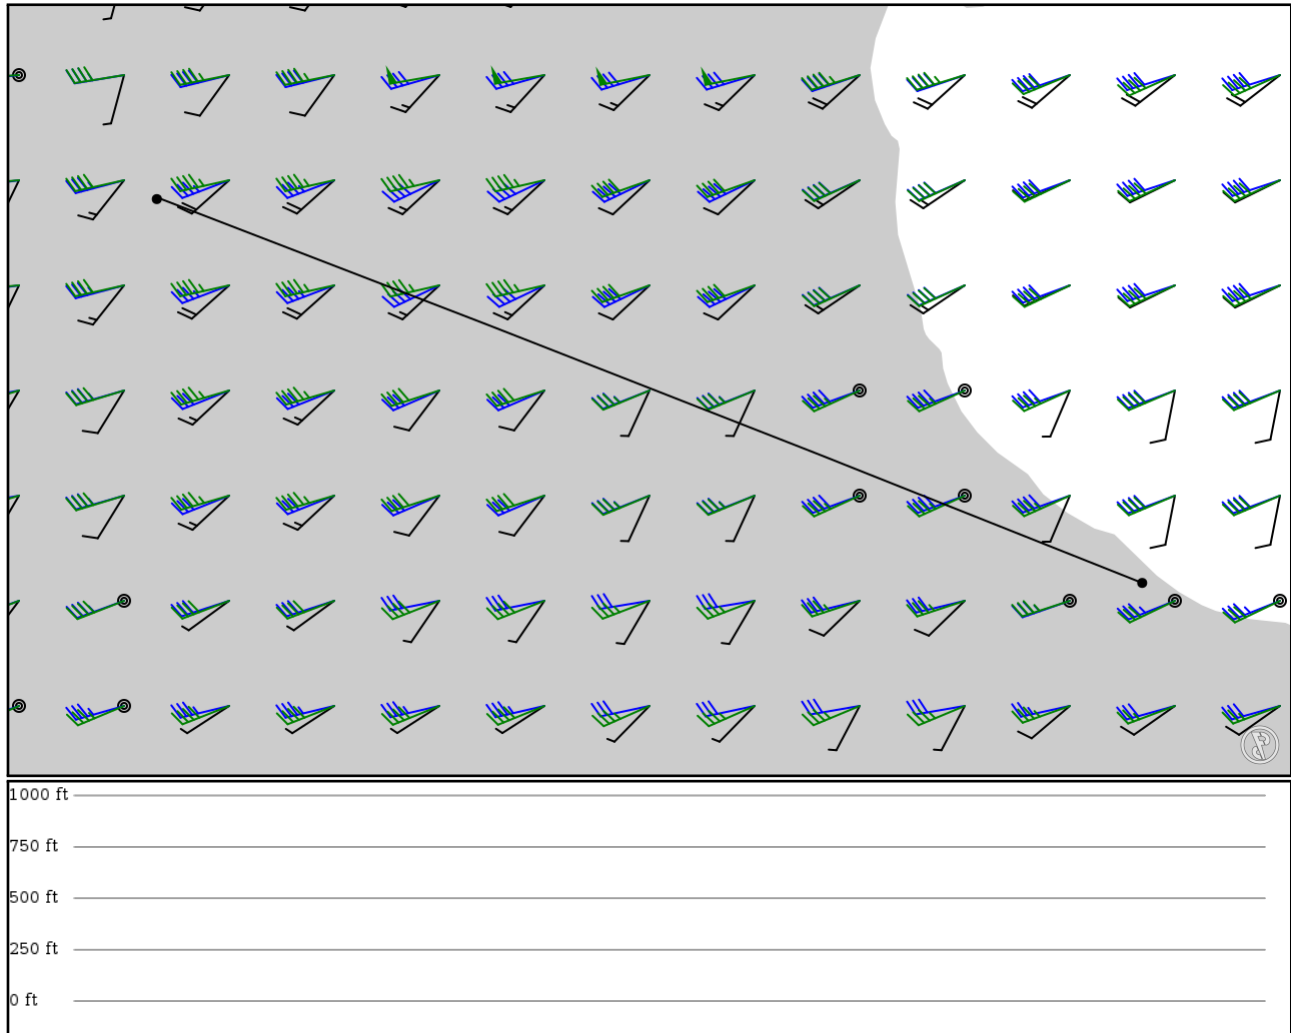

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident		Via	Lat		Alt	Dist	Name
Type			Lon			(nm)	
LIPE	-	44.53560	0 ft	-	Bologna-Borgo Panigale		"Guglielmo Marconi"
APT	-	11.28830	0 m				
BOA	-	44.53700	0 ft	0	BOLOGNA		
VOR	-	11.29070	0 m				
LIPR	-	44.02040	0 ft	64	Rimini-Miramare		"Federico Fellini"
APT	-	12.61160	0 m				

## LIPE

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 1

Elevation: 123 ft / 37 m  
Location: 44.535600 11.288300  
Magnetic Var: 3.640 E

## METAR

LIPE 051220Z VRB01KT CAVOK 28/13 Q1015

## TAF

TAF LIPE 051100Z 0512/0612 VRB06KT 9999 FEW030

## Frequencies

REC - 134.87 MHz - ATIS  
TWR - 120.80 MHz - BOLOGNA TOWER  
APP - 129.90 MHz - BOLOGNA APPROACH  
GND - 129.92 MHz - BOLOGNA GROUND  
APP - 120.10 MHz - BOLOGNA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	9,206 ft	116.79	ASPHALT	1,017 ft	243 ft
	45 m	2,806 m	113.15		310 m	74 m
30	148 ft	9,206 ft	296.81	ASPHALT	1,188 ft	180 ft
	45 m	2,806 m	293.17		362 m	55 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	DME	BLN	108.90 MHz	18 nm	-	-	131 ft
				33 km	-		131 m
30	DME	IBBP	109.75 MHz	18 nm	-	-	123 ft
				33 km	-		123 m
12	LOC-ILS	BLN	108.90 MHz	18 nm	116.81	-	123 ft
				33 km	113.17		123 m
30	LOC-ILS	IBBP	109.75 MHz	18 nm	296.66	-	123 ft
				33 km	293.02		123 m
12	GS	BLN	108.90 MHz	10 nm	117.59	3.00	120 ft
				19 km	113.95		120 m
30	GS	IBBP	109.75 MHz	10 nm	297.75	3.50	123 ft
				19 km	294.11		123 m

## LIPR

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 1

Elevation: 41 ft / 12 m  
Location: 44.020400 12.611600  
Magnetic Var: 3.876 E

## METAR

LIPR 051220Z 04009KT 010V070 CAVOK 24/19 Q1015

## TAF

TAF LIPR 051100Z 0512/0612 08010KT CAVOK BECMG 0516/0518 VRB05KT BECMG 0608/0610 07010KT

## Frequencies

TWR - 119.10 MHz - RIMINI TOWER  
TWR - 122.10 MHz - RIMINI TOWER  
APP - 122.10 MHz - ROMAGNA RADAR

TWR - 121.60 MHz - RIMINI TOWER  
APP - 118.15 MHz - ROMAGNA RADAR  
APP - 118.57 MHz - ROMAGNA RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13	148 ft	9,728 ft	127.78	CONCRETE	1,024 ft	830 ft
	45 m	2,965 m	123.91		312 m	253 m
31	148 ft	9,728 ft	307.80	CONCRETE	896 ft	459 ft
	45 m	2,965 m	303.93		273 m	140 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
31	LOC-ILS	MIR	109.30 MHz	18 nm	307.77	-	41 ft
				33 km	303.89		41 m
31	GS	MIR	109.30 MHz	10 nm	308.60	3.00	41 ft
				19 km	304.72		41 m