

YSSY

Sydney Kingsford Smith Intl


NZAA

Auckland Intl

2024/05/05 0505Z

YSSY KAMPI EVONN L521 LUNBI NZAA

1177.44 nm / 2180.61 km

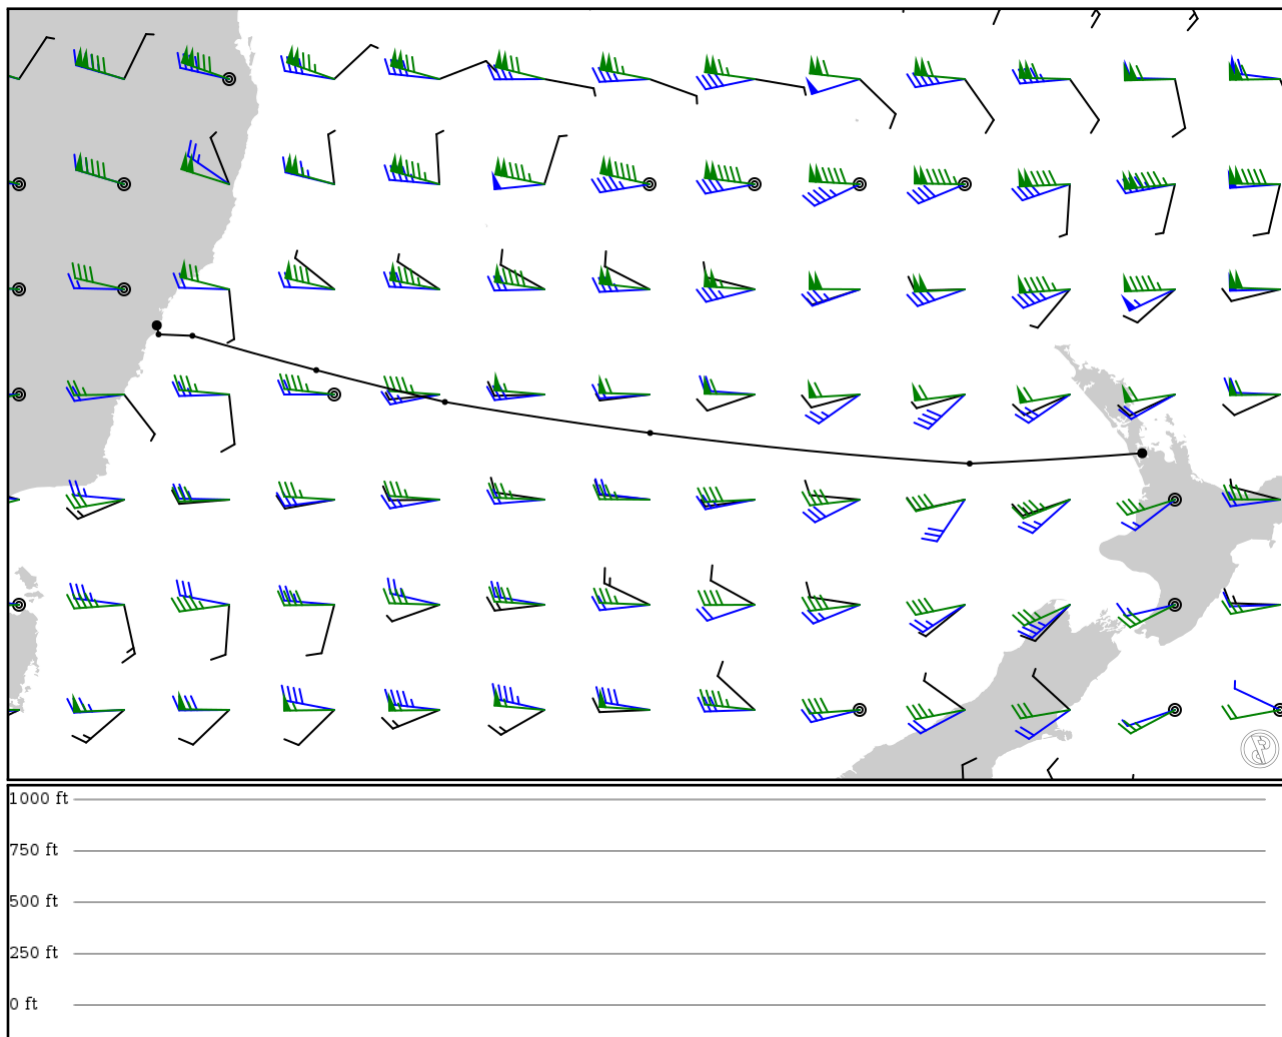

Notes

Requested: YSSY KAMPI EVONN L521 LUNBI NZAA

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
YSSY	-	-33.94610	0 ft	-	Sydney Kingsford Smith Intl
APT	-	151.17700	0 m	-	
KAMPI	-	-34.16170	0 ft	13	-
FIX	-	151.22000	0 m	-	
EVONN	-	-34.19520	0 ft	40	-
FIX	-	152.03100	0 m	-	
GEROS	L521	-35.01820	0 ft	154	-
FIX	AWY-HI	154.99900	0 m	-	
WALTZ	L521	-35.78080	0 ft	157	-
FIX	AWY-HI	158.08200	0 m	-	
LEGAN	L521	-36.52350	0 ft	242	-
FIX	AWY-HI	163.00000	0 m	-	
LUNBI	L521	-37.25700	0 ft	370	-
FIX	AWY-HI	170.65700	0 m	-	
NZAA	-	-37.00810	0 ft	198	Auckland Intl
APT	-	174.79200	0 m	-	

YSSY

Region: AUSTRALIA
Timezone: AUSTRALIA/SYDNEY
Runways: 3

Elevation: 21 ft / 6 m
Location: -33.946100 151.177000
Magnetic Var: 12.671 E

METAR

YSSY 050435Z 19010G20KT 8000 -RA FEW012 SCT025 BKN035 16/15 Q1020

TAF

TAF YSSY 050204Z 0503/0606 17017KT 9999 -RA SCT010 BKN015 FM051800 15017KT 9999 -SHRA SCT020 BKN040 TEMPO 0503/0506 17017KT 9999 -RA SCT010 BKN015

Frequencies

REC - 118.55 MHz - ATIS	REC - 126.55 MHz - ATIS
TWR - 124.70 MHz - SYDNEY TOWER	TWR - 120.50 MHz - SYDNEY TOWER
GND - 126.50 MHz - SYDNEY GROUND	GND - 121.70 MHz - SYDNEY GROUND
GND - 130.95 MHz - ANSETT APRON	GND - 127.60 MHz - SYDNEY COORDINATOR
CLD - 133.80 MHz - SYDNEY CLEARANCE DELIVERY	APP - 124.40 MHz - SYDNEY APPROACH
APP - 128.30 MHz - SYDNEY APPROACH	APP - 135.90 MHz - SYDNEY APPROACH
APP - 126.10 MHz - SYDNEY DIRECT	APP - 125.30 MHz - SYDNEY DIRECT
APP - 133.95 MHz - ILS MONITOR	APP - 119.45 MHz - ILS MONITOR
DEP - 129.70 MHz - SYDNEY DEPARTURE	DEP - 128.30 MHz - SYDNEY DEPARTURE
DEP - 123.00 MHz - SYDNEY DEPARTURE	DEP - 118.40 MHz - SYDNEY DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	148 ft	8,018 ft	167.85	ASPHALT	758 ft	295 ft
	45 m	2,444 m	155.18		231 m	90 m
34R	148 ft	8,018 ft	347.85	ASPHALT	125 ft	295 ft
	45 m	2,444 m	335.18		38 m	90 m
07	148 ft	8,285 ft	74.14	ASPHALT	0 ft	489 ft
	45 m	2,525 m	61.46		0 m	149 m
25	148 ft	8,285 ft	254.12	ASPHALT	331 ft	197 ft
	45 m	2,525 m	241.45		101 m	60 m
16R	148 ft	13,029 ft	167.86	ASPHALT	279 ft	299 ft
	45 m	3,971 m	155.19		85 m	91 m
34L	148 ft	13,029 ft	347.85	ASPHALT	0 ft	620 ft
	45 m	3,971 m	335.18		0 m	189 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	DME	ISY	109.90 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
16L	DME	ISS	110.90 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
25	DME	ISW	109.70 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
34R	DME	IKN	109.30 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
07	LOC-ILS	ISY	109.90 MHz	18 nm	74.13	-	21 ft
				33 km	61.46		21 m
16L	LOC-ILS	ISS	110.90 MHz	18 nm	167.85	-	21 ft
				33 km	155.18		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16R	LOC-ILS	IKS	109.50 MHz	18 nm	167.86	-	21 ft
				33 km	155.19		21 m
25	LOC-ILS	ISW	109.70 MHz	18 nm	254.13	-	21 ft
				33 km	241.46		21 m
34L	LOC-ILS	ISN	110.10 MHz	18 nm	347.86	-	21 ft
				33 km	335.19		21 m
34R	LOC-ILS	IKN	109.30 MHz	18 nm	347.85	-	21 ft
				33 km	335.18		21 m
07	GS	ISY	109.90 MHz	10 nm	74.13	3.00	21 ft
				19 km	61.46		21 m
16L	GS	ISS	110.90 MHz	10 nm	167.85	3.00	21 ft
				19 km	155.18		21 m
16R	GS	IKS	109.50 MHz	10 nm	167.86	3.00	21 ft
				19 km	155.19		21 m
25	GS	ISW	109.70 MHz	10 nm	254.13	3.00	21 ft
				19 km	241.46		21 m
34L	GS	ISN	110.10 MHz	10 nm	347.86	3.00	21 ft
				19 km	335.19		21 m
34R	GS	IKN	109.30 MHz	10 nm	347.85	3.00	21 ft
				19 km	335.18		21 m

NZAA

Region: NEW ZEALAND AND ANTARCTICA
Timezone: PACIFIC/AUCKLAND
Runways: 1

Elevation: 23 ft / 7 m
Location: -37.008100 174.792000
Magnetic Var: 20.178 E

METAR

NZAA 050430Z AUTO 05006KT 9999 BKN055/// 18/10 Q1021

TAF

TAF NZAA 050202Z 0503/0606 03010KT 9999 FEW050 BECMG 0508/0510 VRB02KT FM052300 02010KT 9999 -SHRA SCT025 BKN050

Frequencies

REC - 127.80 MHz - ATIS	REC - 127.00 MHz - ATIS
GND - 121.90 MHz - AUCKLAND GROUND	TWR - 118.70 MHz - AUCKLAND TOWER
TWR - 120.95 MHz - AUCKLAND TOWER	CLD - 128.20 MHz - CLEARANCE DELIVERY
APP - 120.10 MHz - AUCKLAND APPROACH	APP - 124.30 MHz - AUCKLAND APPROACH
APP - 129.50 MHz - AUCKLAND APPROACH	APP - 129.60 MHz - AUCKLAND APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	151 ft	12,040 ft	70.92	CONCRETE	1,250 ft	0 ft
	46 m	3,670 m	50.75		381 m	0 m
23L	151 ft	12,040 ft	250.90	CONCRETE	0 ft	131 ft
	46 m	3,670 m	230.72		0 m	40 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	DME	IAA	110.30 MHz	18 nm	-	-	23 ft
				33 km	-		23 m
23L	DME	IMG	109.90 MHz	18 nm	-	-	23 ft
				33 km	-		23 m
05R	LOC-ILS	IAA	110.30 MHz	18 nm	70.91	-	23 ft
				33 km	50.73		23 m
23L	LOC-ILS	IMG	109.90 MHz	18 nm	250.91	-	23 ft
				33 km	230.73		23 m
05R	GS	IAA	110.30 MHz	10 nm	70.91	3.00	23 ft
				19 km	50.73		23 m
23L	GS	IMG	109.90 MHz	10 nm	250.91	3.00	23 ft
				19 km	230.73		23 m