

UTAT

Dashoguz


ZUUU

Chengdu Shuangliu Intl

2024/05/06 2008Z

UTAT DIKNA **B370** TMD TMD **B363** AN **G134** OSH KHG **A364** SCH **W187** SADAN **L888** PEXUN **B213** KAMAX ZUUU

2363.90 nm / 4377.94 km

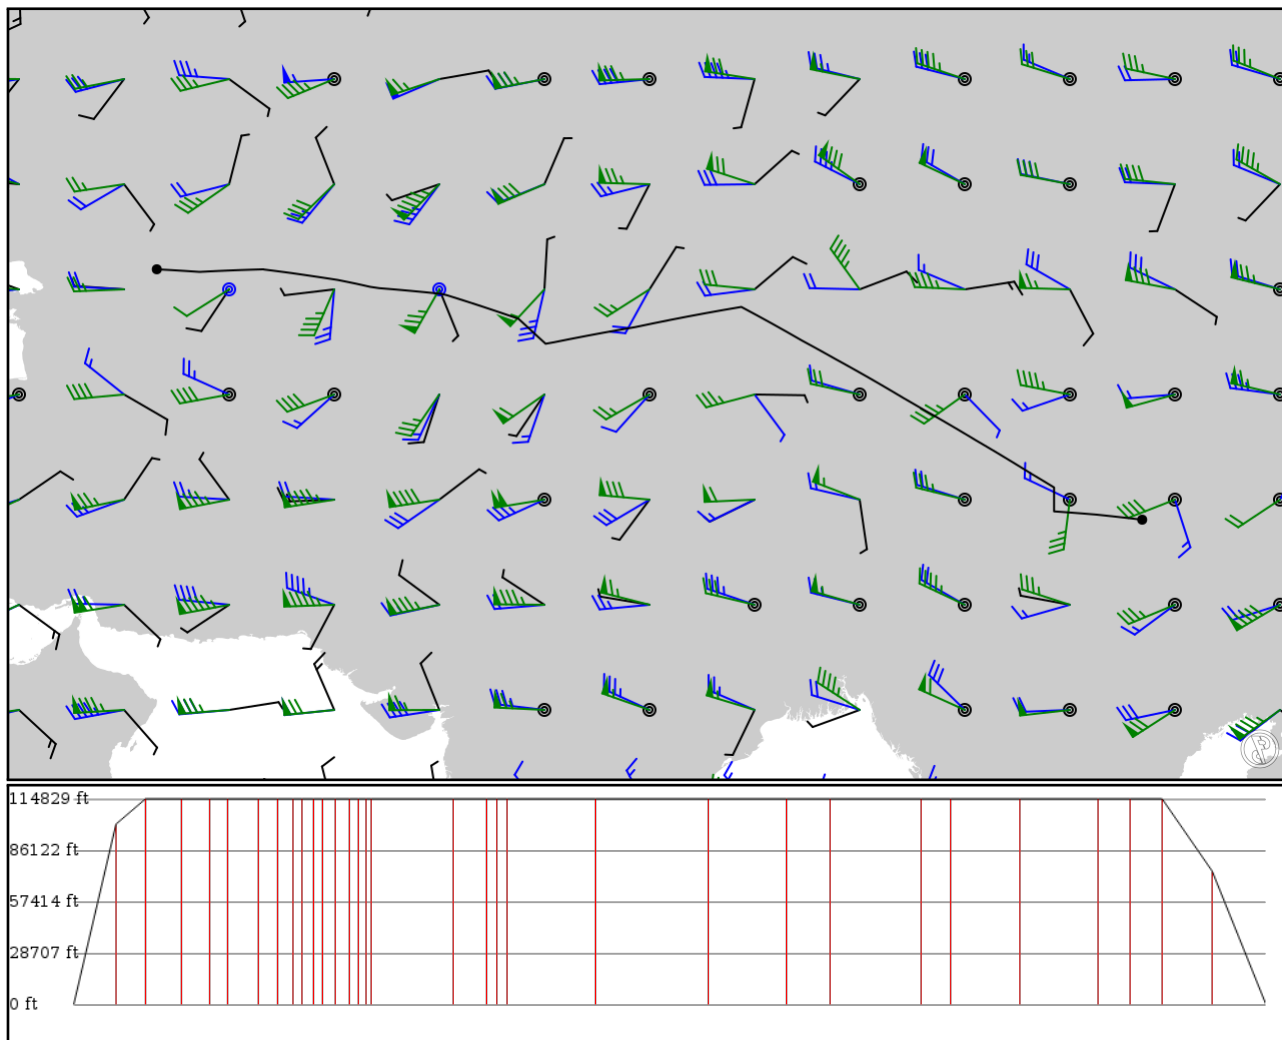

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
UTAT	-	41.76000	0 ft	-	Dashoguz
APT	-	59.83440	0 m		
DIKNA	-	41.64330	30,700 ft	86	-
FIX	-	61.75000	9,357 m		
RUMAM	B370	41.70330	35,000 ft	56	-
FIX	AWY-HI	63.00000	10,668 m		
TMD	B370	41.75970	35,000 ft	72	TAMDYBULAK
VOR	AWY-HI	64.61650	10,668 m		
TMD	-	41.75000	35,000 ft	0	TAMDYBULAK VOR-DME
DME	-	64.63330	10,668 m		
TAGAM	B363	41.59500	35,000 ft	54	-
FIX	AWY-HI	65.83830	10,668 m		
OGOLI	B363	41.48280	35,000 ft	35	-
FIX	AWY-HI	66.60890	10,668 m		
DIBAD	B363	41.28330	35,000 ft	60	-
FIX	AWY-HI	67.93330	10,668 m		
ABEKA	B363	41.11810	35,000 ft	37	-
FIX	AWY-HI	68.74500	10,668 m		
USOLO	B363	40.97500	35,000 ft	30	-
FIX	AWY-HI	69.38670	10,668 m		
LELBA	B363	40.91500	35,000 ft	18	-
FIX	AWY-HI	69.79500	10,668 m		
GIKOD	B363	40.87500	35,000 ft	22	-
FIX	AWY-HI	70.28830	10,668 m		
NULMO	B363	40.84170	35,000 ft	17	-
FIX	AWY-HI	70.67830	10,668 m		
KOLIX	B363	40.79000	35,000 ft	26	-
FIX	AWY-HI	71.25330	10,668 m		
RINDO	B363	40.73170	35,000 ft	28	-
FIX	AWY-HI	71.86830	10,668 m		
AN	B363	40.69350	35,000 ft	17	ANDIZHAN
NDB	AWY-HI	72.24740	10,668 m		
OGODA	G134	40.65500	35,000 ft	15	-
FIX	AWY-HI	72.58000	10,668 m		
OSH	G134	40.60620	35,000 ft	10	OSH
VOR	AWY-HI	72.80200	10,668 m		
KHG	-	39.54670	35,000 ft	161	KASHI
VOR	-	76.02330	10,668 m		
ANKIV	A364	38.70830	35,000 ft	65	-
FIX	AWY-HI	76.93330	10,668 m		
SCH	A364	38.42830	35,000 ft	22	SHACHE VOR-DME
DME	AWY-HI	77.24000	10,668 m		
PUBOD	W187	38.49670	35,000 ft	18	-
FIX	AWY-HI	77.62330	10,668 m		
TAPUG	W187	39.17500	35,000 ft	174	-
FIX	AWY-HI	81.26000	10,668 m		
SADAN	W187	40.07670	35,000 ft	225	-
FIX	AWY-HI	86.00000	10,668 m		
NOLEP	L888	38.57500	35,000 ft	154	-
FIX	AWY-HI	88.70830	10,668 m		
TONAX	L888	37.75830	35,000 ft	85	-
FIX	AWY-HI	90.18830	10,668 m		
LEBAK	L888	36.00000	35,000 ft	181	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	93.25830	10,668 m		
TEMOL	L888	35.45170	35,000 ft	56	-
FIX	AWY-HI	94.20330	10,668 m		
MUMAN	L888	34.10830	35,000 ft	139	-
FIX	AWY-HI	96.50000	10,668 m		
LUVAR	L888	32.60170	35,000 ft	154	-
FIX	AWY-HI	99.00000	10,668 m		
SANLI	L888	32.00000	35,000 ft	62	-
FIX	AWY-HI	100.00000	10,668 m		
PEXUN	L888	30.92830	35,000 ft	64	-
FIX	AWY-HI	100.00000	10,668 m		
KAMAX	B213	30.78330	22,700 ft	98	-
FIX	AWY-HI	101.90300	6,919 m		
ZUUU	-	30.55650	0 ft	106	Chengdu Shuangliu Intl
APT	-	103.94500	0 m		

UTAT

Region: TAJIKISTAN, TURKMENISTAN AND UZBEKISTAN Elevation: 282 ft / 86 m
Timezone: ASIA/ASHGABAT Location: 41.760000 59.834400
Runways: 1 Magnetic Var: 6.719 E

METAR

UTAT 061900Z 11008KT CAVOK 24/11 Q1011 R08/CLRD70 NOSIG

TAF

TAF UTAT 061630Z 0617/0718 09018KT 9999 -SHRA SCT050CB OVC070 TEMPO 0617/0623 VRB32KT 3000 -TSRA BKN030CB TEMPO 0

Frequencies

APP - 124.70 MHz - DASHOGUZ APPROACH TWR - 122.70 MHz - DASHOGUZ TOWER
REC - 112.00 MHz - DASHOGUZ INFORMATION

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	197 ft	12,439 ft	90.19	CONCRETE	0 ft	0 ft
	60 m	3,791 m	83.48		0 m	0 m
26	197 ft	12,439 ft	270.23	CONCRETE	0 ft	0 ft
	60 m	3,791 m	263.51		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	LOC-ILS	IRP	108.30 MHz	18 nm	90.21	-	282 ft
				33 km	83.49		282 m
26	LOC-ILS	ISH	111.30 MHz	18 nm	270.21	-	282 ft
				33 km	263.49		282 m
08	GS	IRP	108.30 MHz	10 nm	90.21	3.00	282 ft
				19 km	83.49		282 m
26	GS	ISH	111.30 MHz	10 nm	270.21	3.00	282 ft
				19 km	263.49		282 m

ZUUU

Region: CHINA
Timezone: ASIA/CHONGQING
Runways: 2

Elevation: 1,680 ft / 512 m
Location: 30.556500 103.945000
Magnetic Var: 2.090 W

METAR

ZUUU 061900Z 21002MPS CAVOK 20/17 Q1015 NOSIG

TAF

TAF ZUUU 061502Z 0618/0718 22003MPS 6000 SCT050 TX27/0707Z TN18/0622Z TEMPO 0700/0704 -SHRA FEW030CB SCT050

Frequencies

REC - 126.45 MHz - ATIS	REC - 128.60 MHz - ATIS
CLD - 121.60 MHz - CHENGDU DELIVERY	GND - 121.85 MHz - CHENGDU GROUND
GND - 121.75 MHz - CHENGDU GROUND	GND - 121.70 MHz - CHENGDU GROUND
GND - 121.90 MHz - SHUANGLIU APRON	GND - 121.80 MHz - SHUANGLIU APRON
GND - 121.65 MHz - SHUANGLIU APRON	TWR - 123.00 MHz - CHENGDU TOWER
TWR - 130.35 MHz - CHENGDU TOWER	TWR - 118.85 MHz - CHENGDU TOWER
APP - 124.85 MHz - CHENGDU APPROACH	APP - 119.70 MHz - CHENGDU APPROACH
APP - 119.25 MHz - CHENGDU APPROACH	APP - 124.75 MHz - CHENGDU APPROACH
APP - 119.42 MHz - CHENGDU APPROACH	APP - 127.70 MHz - CHENGDU APPROACH
APP - 125.25 MHz - CHENGDU APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02R	197 ft	11,848 ft	21.83	CONCRETE	0 ft	394 ft
	60 m	3,611 m	23.92		0 m	120 m
20L	197 ft	11,848 ft	201.83	CONCRETE	0 ft	394 ft
	60 m	3,611 m	203.92		0 m	120 m
02L	148 ft	11,839 ft	21.84	ASPHALT	0 ft	197 ft
	45 m	3,609 m	23.93		0 m	60 m
20R	148 ft	11,839 ft	201.84	ASPHALT	0 ft	200 ft
	45 m	3,609 m	203.93		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02L	LOC-ILS	IZW	111.10 MHz	18 nm	21.85	-	1,681 ft
				33 km	23.94		1,681 m
02R	LOC-ILS	ICR	108.70 MHz	18 nm	21.86	-	1,681 ft
				33 km	23.95		1,681 m
20L	LOC-ILS	IDE	109.70 MHz	18 nm	201.86	-	1,681 ft
				33 km	203.95		1,681 m
20R	LOC-ILS	IAA	109.10 MHz	18 nm	201.85	-	1,681 ft
				33 km	203.94		1,681 m
02L	GS	IZW	111.10 MHz	10 nm	21.85	3.00	1,681 ft
				19 km	23.94		1,681 m
02R	GS	ICR	108.70 MHz	10 nm	21.86	3.00	1,681 ft
				19 km	23.95		1,681 m
20L	GS	IDE	109.70 MHz	10 nm	201.86	3.00	1,681 ft
				19 km	203.95		1,681 m
20R	GS	IAA	109.10 MHz	10 nm	201.85	3.00	1,681 ft
				19 km	203.94		1,681 m