

KJFK

John F. Kennedy Intl


KBOS

General Edward Lawrence Logan Intl

2024/05/23 0644Z

KJFK WIPOR KBOS

161.93 nm / 299.89 km

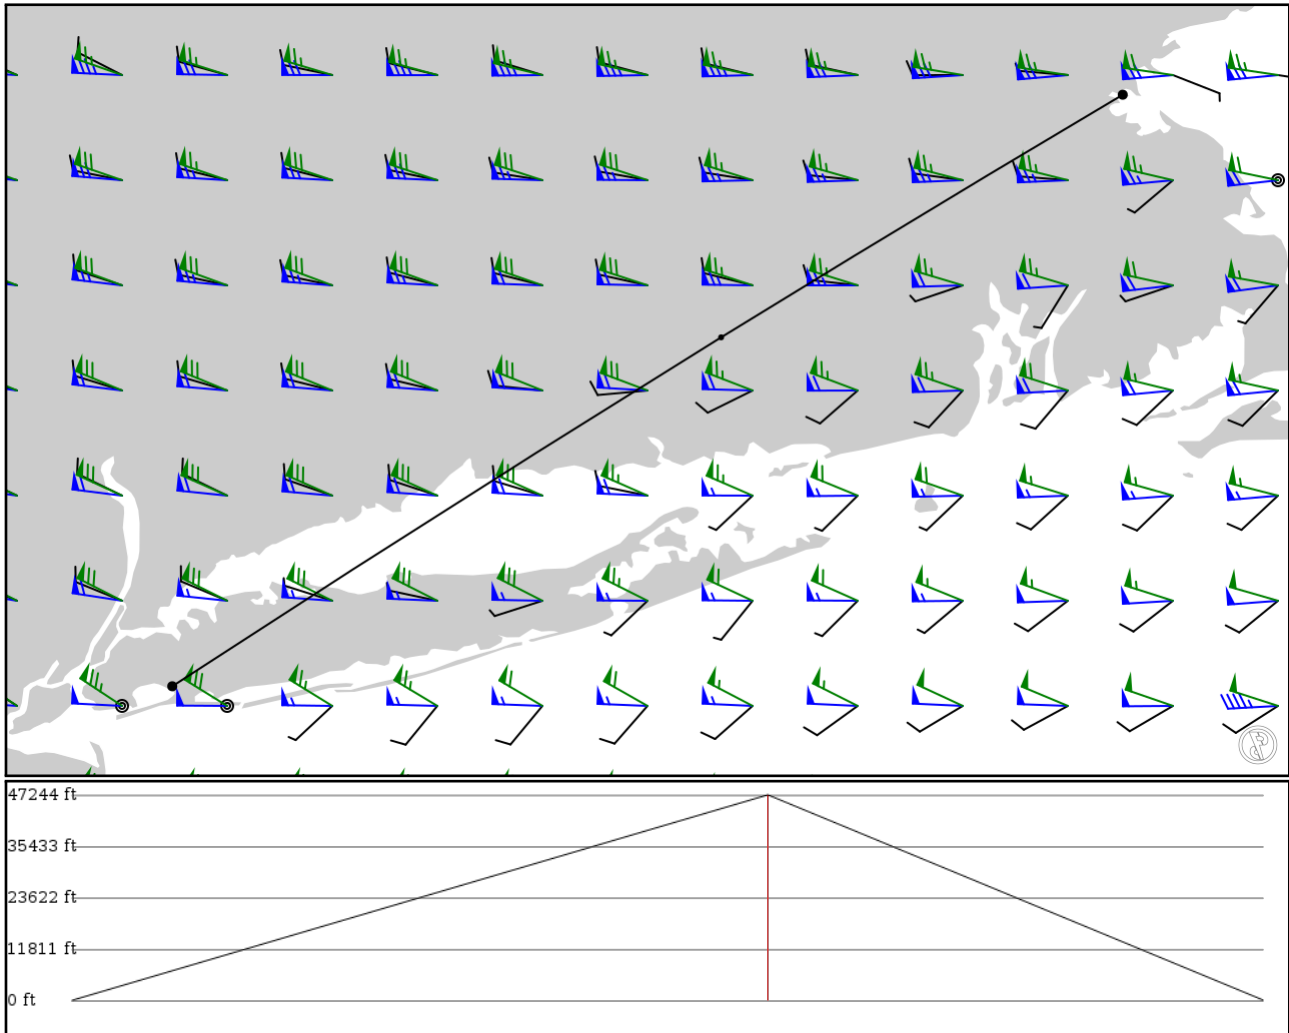

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 15000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
KJFK	-	40.64010	0 ft	-	John F. Kennedy Intl	
APT	-	-73.77650	0 m			
WIPOR	-	41.65640	14,400 ft	94	-	
FIX	-	-72.17710	4,389 m			
KBOS	-	42.36300	0 ft	67	General Edward Lawrence Logan Intl	
APT	-	-71.00680	0 m			

KJFK

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 12 ft / 4 m
Location: 40.640100 -73.776500
Magnetic Var: 12.818 W

METAR

KJFK 230551Z 18006KT 10SM SCT250 18/16 A2989 RMK AO2 SLP122 T01780156 10200 20178 58007 \$

TAF

TAF KJFK 230539Z 2306/2412 20008KT P6SM BKN120 BKN250 FM231100 20009KT P6SM -SHRA OVC040 TEMPO 2314/2315 25009G20

Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.48		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.49		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
31R	DME	IRTH	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm	30.68	-	12 ft
				33 km	43.50		12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm	30.67	-	12 ft
				33 km	43.49		12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm	120.87	-	12 ft
				33 km	133.69		12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm	210.67	-	12 ft
				33 km	223.49		12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm	210.68	-	12 ft
				33 km	223.50		12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm	300.84	-	12 ft
				33 km	313.66		12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm	300.87	-	12 ft
				33 km	313.69		12 m
04L	GS	IHIQ	110.90 MHz	10 nm	30.68	3.00	12 ft
				19 km	43.50		12 m
04R	GS	IJFK	109.50 MHz	10 nm	30.67	3.00	12 ft
				19 km	43.49		12 m
13L	GS	ITLK	111.50 MHz	10 nm	120.87	3.00	12 ft
				19 km	133.69		12 m
22L	GS	IIWY	110.90 MHz	10 nm	210.67	3.00	12 ft
				19 km	223.49		12 m
22R	GS	IJOC	109.50 MHz	10 nm	210.68	3.00	12 ft
				19 km	223.50		12 m
31L	GS	IMOH	111.35 MHz	10 nm	300.84	3.00	12 ft
				19 km	313.66		12 m
31R	GS	IRTH	111.50 MHz	10 nm	300.87	3.00	12 ft
				19 km	313.69		12 m

KBOS

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 6

Elevation: 19 ft / 6 m
Location: 42.363000 -71.006800
Magnetic Var: 14.284 W

METAR

KBOS 230554Z 21010KT 10SM FEW250 19/14 A2984 RMK AO2 SLP103 T01940144 10239 20194 56003

TAF

TAF KBOS 230539Z 2306/2412 22008KT P6SM FEW250 PROB30 2315/2319 4SM -SHRA OVC030 FM240100 25006KT P6SM BKN250

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 121.65 MHz - CLEARANCE DELIVERY	GND - 121.75 MHz - BOSTON GROUND
GND - 121.90 MHz - BOSTON GROUND	TWR - 128.80 MHz - BOSTON TOWER
TWR - 124.72 MHz - BOSTON TOWER	TWR - 132.22 MHz - BOSTON TOWER
APP - 118.25 MHz - BOSTON APPROACH	APP - 120.60 MHz - BOSTON APPROACH
APP - 127.20 MHz - BOSTON APPROACH	DEP - 133.00 MHz - BOSTON DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	148 ft	10,092 ft	135.27	ASPHALT	883 ft	197 ft
	45 m	3,076 m	149.55		269 m	60 m
33L	148 ft	10,092 ft	315.29	ASPHALT	0 ft	167 ft
	45 m	3,076 m	329.57		0 m	51 m
04R	148 ft	10,012 ft	19.69	ASPHALT	1,155 ft	420 ft
	45 m	3,052 m	33.97		352 m	128 m
22L	148 ft	10,012 ft	199.69	ASPHALT	1,201 ft	200 ft
	45 m	3,052 m	213.98		366 m	61 m
04L	148 ft	7,871 ft	19.66	ASPHALT	0 ft	1,250 ft
	45 m	2,399 m	33.94		0 m	381 m
22R	148 ft	7,871 ft	199.66	ASPHALT	820 ft	200 ft
	45 m	2,399 m	213.95		250 m	61 m
09	148 ft	7,008 ft	76.51	ASPHALT	0 ft	932 ft
	45 m	2,136 m	90.80		0 m	284 m
27	148 ft	7,008 ft	256.53	ASPHALT	0 ft	161 ft
	45 m	2,136 m	270.81		0 m	49 m
14	98 ft	5,005 ft	125.76	ASPHALT	0 ft	0 ft
	30 m	1,526 m	140.05		0 m	0 m
32	98 ft	5,005 ft	305.77	ASPHALT	0 ft	801 ft
	30 m	1,526 m	320.06		0 m	244 m
15L	98 ft	2,558 ft	135.31	ASPHALT	0 ft	305 ft
	30 m	780 m	149.59		0 m	93 m
33R	98 ft	2,558 ft	315.31	ASPHALT	0 ft	59 ft
	30 m	780 m	329.60		0 m	18 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IBOS	110.30 MHz	18 nm	-	-	35 ft
				33 km	-		35 m
15R	DME	IMDC	110.70 MHz	18 nm	-	-	27 ft
				33 km	-		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	DME	ILQN	110.30 MHz	18 nm 33 km	- -	-	35 ft 35 m
27	DME	IDGU	111.30 MHz	18 nm 33 km	- -	-	28 ft 28 m
33L	DME	ILIP	110.70 MHz	18 nm 33 km	- -	-	19 ft 19 m
04R	LOC-ILS	IBOS	110.30 MHz	18 nm 33 km	19.68 33.96	-	20 ft 20 m
15R	LOC-ILS	IMDC	110.70 MHz	18 nm 33 km	135.28 149.56	-	20 ft 20 m
22L	LOC-ILS	ILQN	110.30 MHz	18 nm 33 km	199.68 213.96	-	20 ft 20 m
27	LOC-ILS	IDGU	111.30 MHz	18 nm 33 km	256.52 270.80	-	20 ft 20 m
33L	LOC-ILS	ILIP	110.70 MHz	18 nm 33 km	315.28 329.56	-	20 ft 20 m
04R	GS	IBOS	110.30 MHz	10 nm 19 km	19.68 33.96	3.00	20 ft 20 m
15R	GS	IMDC	110.70 MHz	10 nm 19 km	135.28 149.56	3.00	20 ft 20 m
22L	GS	ILQN	110.30 MHz	10 nm 19 km	199.68 213.96	3.00	20 ft 20 m
27	GS	IDGU	111.30 MHz	10 nm 19 km	256.52 270.80	3.00	20 ft 20 m
33L	GS	ILIP	110.70 MHz	10 nm 19 km	315.28 329.56	3.00	20 ft 20 m