


2024/05/11 0149Z

LFPC KOPOR LF0B

28.42 nm / 52.63 km

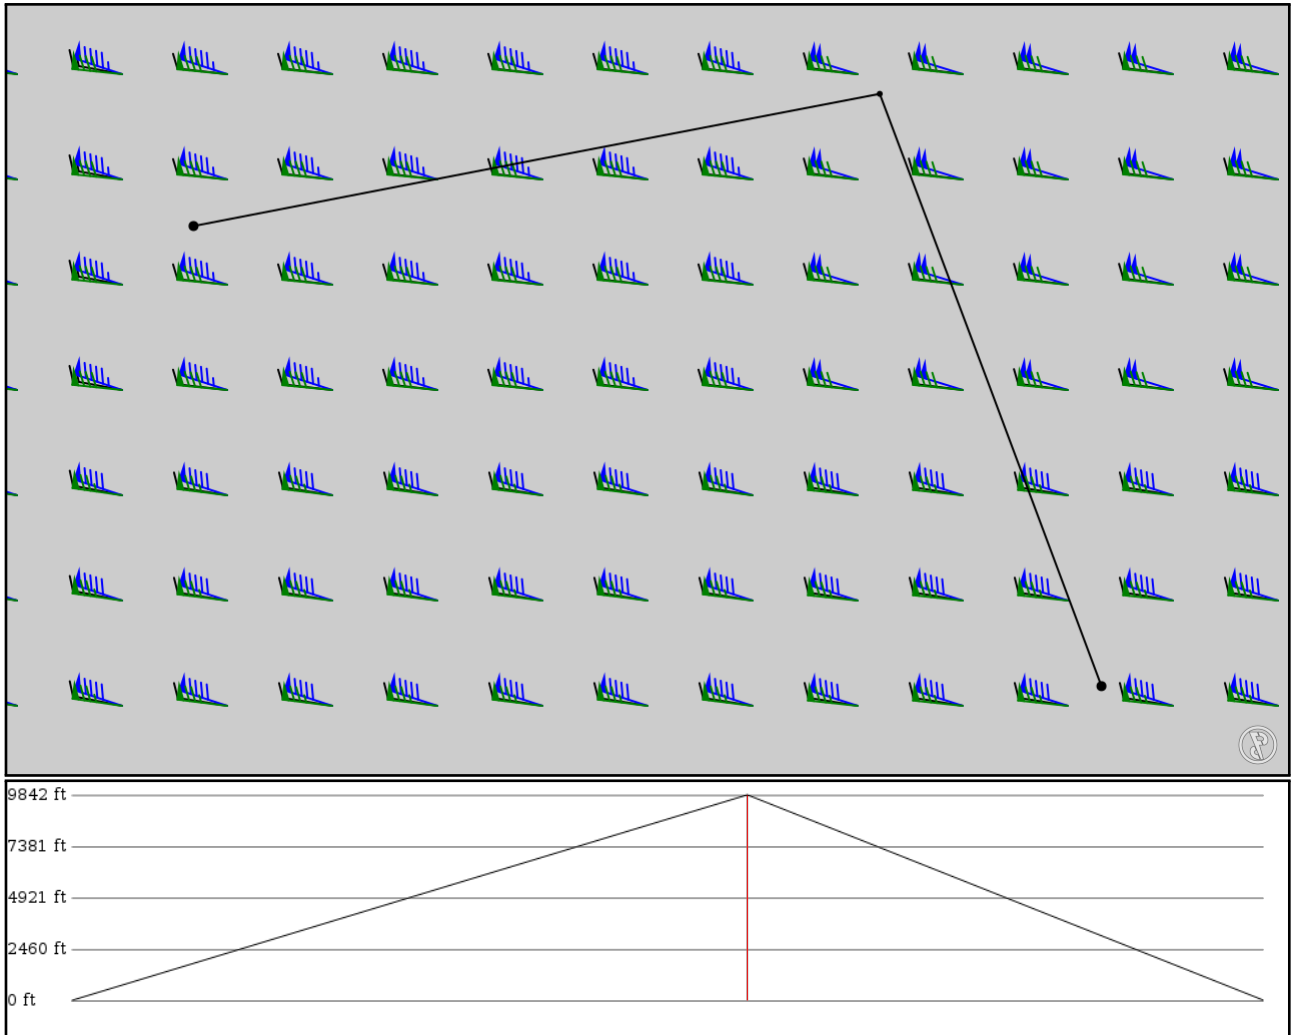

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 120kts
- Cruise Altitude: 3000ft
- Cruise Speed: 140kts
- Descent Rate: 1000ft/min
- Descent Speed: 90kts

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFPC	-	49.25354	0 ft	-	Creil AB
APT	-	2.51913	0 m		
KOPOR	-	49.51417	3,000 ft	16	-
FIX	-	2.42139	914 m		
LFOB	-	49.45600	0 ft	12	Beauvais-Tille
APT	-	2.11891	0 m		

LFPC

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 1

Elevation: 291 ft / 89 m
Location: 49.253500 2.519130
Magnetic Var: 1.472 E

METAR

UNKNOWN

TAF

UNKNOWN

Frequencies

TWR - 122.10 MHz - CREIL SOL
APP - 123.30 MHz - DE GAULLE APP

TWR - 119.70 MHz - CREIL TOWER
APP - 118.15 MHz - DE GAULLE APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	164 ft	7,853 ft	65.13	ASPHALT	643 ft	997 ft
	50 m	2,394 m	63.66		196 m	304 m
25	164 ft	7,853 ft	245.15	ASPHALT	0 ft	971 ft
	50 m	2,394 m	243.68		0 m	296 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	LOC-ILS	CRL	111.50 MHz	18 nm	245.20	-	270 ft
				33 km	243.73		270 m
25	GS	CRL	111.50 MHz	10 nm	245.00	3.00	291 ft
				19 km	243.53		291 m

LFOB

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 2

Elevation: 359 ft / 109 m
Location: 49.456000 2.118930
Magnetic Var: 1.342 E

METAR

LFOB 110130Z AUTO VRB01KT 7000 NSC 11/08 Q1020 TEMPO 3000 BR

TAF

TAF TAF LFOB 102300Z 1100/1124 06005KT CAVOK PROB30 1102/1106 3000 BR

Frequencies

REC - 120.00 MHz - ATIS	REC - 118.37 MHz - ATIS
TWR - 119.90 MHz - BEAUVAIS TOWER	TWR - 121.40 MHz - BEAUVAIS TOWER
APP - 119.90 MHz - BEAUVAIS APPROACH	APP - 121.40 MHz - BEAUVAIS APPROACH
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 133.35 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	7,952 ft	123.73	ASPHALT	144 ft	0 ft
	45 m	2,424 m	122.39		44 m	0 m
30	148 ft	7,952 ft	303.75	ASPHALT	0 ft	0 ft
	45 m	2,424 m	302.41		0 m	0 m
04	59 ft	2,320 ft	41.41	ASPHALT	0 ft	0 ft
	18 m	707 m	40.07		0 m	0 m
22	59 ft	2,320 ft	221.41	ASPHALT	0 ft	0 ft
	18 m	707 m	220.07		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	DME	BVT	111.15 MHz	18 nm	-	-	344 ft
				33 km	-		344 m
30	DME	BI	109.95 MHz	18 nm	-	-	303 ft
				33 km	-		303 m
12	LOC-ILS	BVT	111.15 MHz	18 nm	123.75	-	359 ft
				33 km	122.41		359 m
30	LOC-LOC	BI	109.95 MHz	18 nm	303.75	-	359 ft
				33 km	302.41		359 m
12	GS	BVT	111.15 MHz	10 nm	123.75	3.00	359 ft
				19 km	122.41		359 m