

LICR

Reggio Calabria "Tito Minniti"


LIRF

Roma-Fiumicino "Leonardo da Vinci"

2024/05/21 0216Z

LICR DIRET **T111** DELER **M729** EDOPA LIRF

275.58 nm / 510.38 km

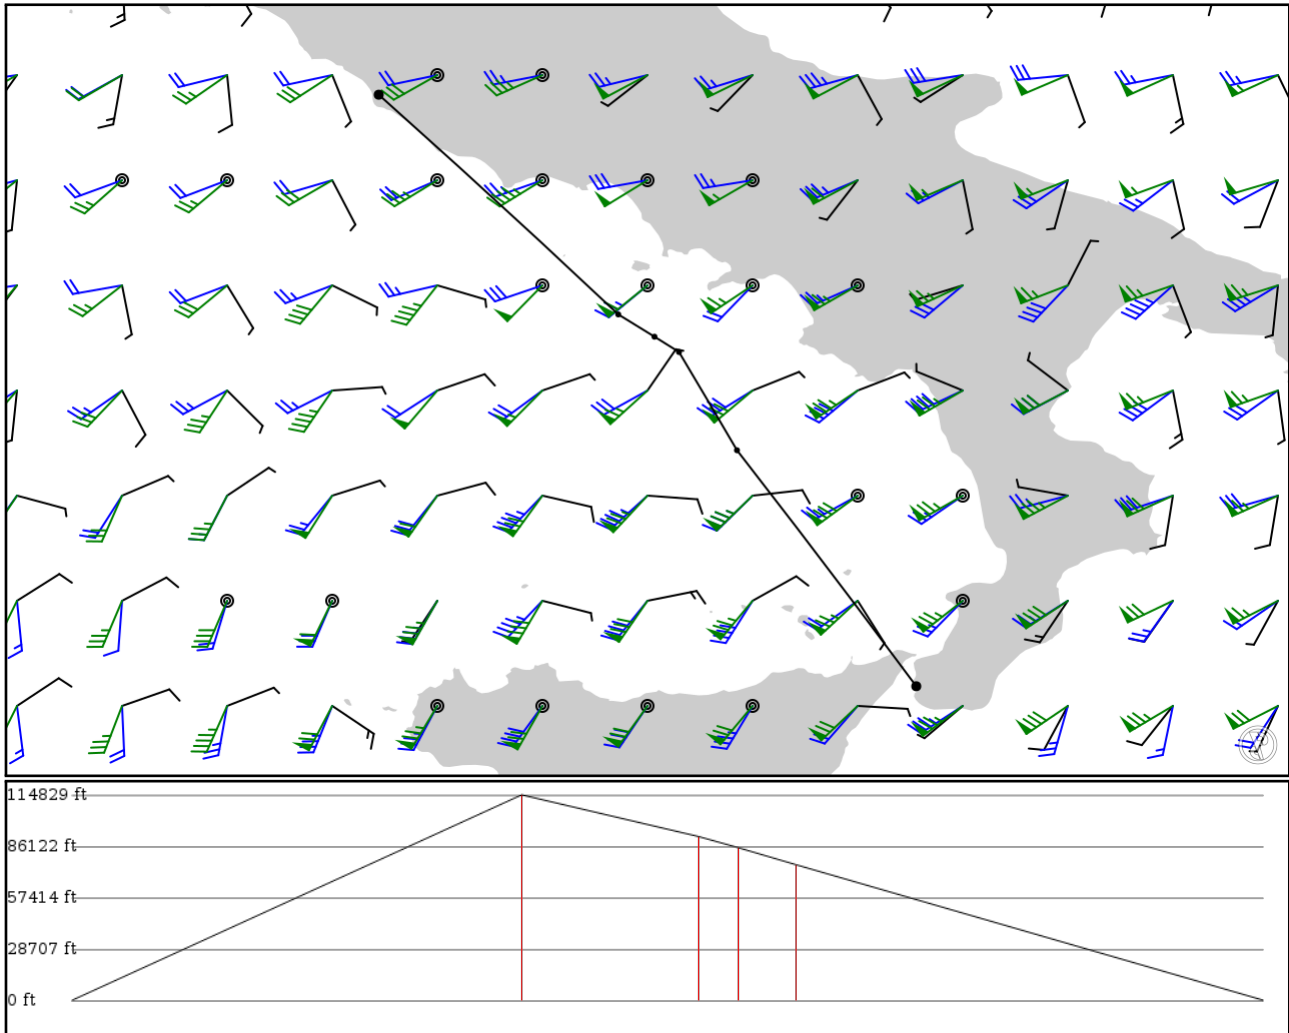

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LICR	-	38.07280	0 ft	-	Reggio Calabria "Tito Minniti"
APT	-	15.64930	0 m	-	
DIRED	-	39.56420	35,000 ft	104	-
FIX	-	14.51580	10,668 m	-	-
DELER	T111	40.18500	27,900 ft	40	-
FIX	AWY-HI	14.14920	8,504 m	-	-
PEVIR	M729	40.28170	26,000 ft	9	-
FIX	AWY-HI	13.99420	7,925 m	-	-
EDOPA	M729	40.42250	23,100 ft	13	-
FIX	AWY-HI	13.76530	7,041 m	-	-
LIRF	-	41.81080	0 ft	107	Roma-Fiumicino "Leonardo da Vinci"
APT	-	12.25090	0 m	-	

LICR

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 96 ft / 29 m
Location: 38.072800 15.649300
Magnetic Var: 3.969 E

METAR

LICR 210150Z AUTO 35005KT 9999 NCD 19/17 Q1009

TAF

TAF LICR 202300Z 2100/2124 20018KT 9999 SCT030 BECMG 2100/2102 01015G25KT TEMPO 2108/2116 SHRA

Frequencies

TWR - 118.25 MHz - REGGIO TOWER

APP - 120.27 MHz - REGGIO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	148 ft	6,561 ft	152.90	ASPHALT	820 ft	0 ft
	45 m	2,000 m	148.93		250 m	0 m
33	148 ft	6,561 ft	332.90	ASPHALT	164 ft	0 ft
	45 m	2,000 m	328.93		50 m	0 m
11	148 ft	5,579 ft	112.65	ASPHALT	0 ft	0 ft
	45 m	1,701 m	108.68		0 m	0 m
29	148 ft	5,579 ft	292.66	ASPHALT	0 ft	0 ft
	45 m	1,701 m	288.69		0 m	0 m

Approach Navaids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
33	LOC-LOC	REG	109.30 MHz	18 nm	19.16	-	95 ft
				33 km	15.20		95 m

LIRF

Region: ITALY
Timezone: EUROPE/ROME
Runways: 3

Elevation: 13 ft / 4 m
Location: 41.810800 12.250900
Magnetic Var: 3.668 E

METAR

LIRF 210150Z 26013KT 9999 FEW010 BKN035 20/17 Q1005 NOSIG

TAF

TAF LIRF 202300Z 2100/2206 31007KT 9999 SCT040 TEMPO 2100/2110 SHRA BECMG 2100/2102 26015KT

Frequencies

REC - 120.17 MHz - ATIS ARRIVAL	REC - 126.12 MHz - ATIS ARRIVAL
REC - 121.85 MHz - ATIS DEPARTURE	CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.72 MHz - FIUME APRON	GND - 121.67 MHz - FIUME GROUND
GND - 121.90 MHz - FIUME GROUND	GND - 122.12 MHz - FIUME GROUND
TWR - 127.62 MHz - FIUME TOWER	TWR - 123.72 MHz - FIUME TOWER
TWR - 118.70 MHz - FIUME TOWER	DEP - 130.90 MHz - ROMA DEPARTURE
DEP - 131.10 MHz - ROMA DEPARTURE	APP - 127.95 MHz - ROMA ARRIVAL
APP - 125.50 MHz - ROMA ARRIVAL	APP - 119.20 MHz - ROMA DIRECT
APP - 131.25 MHz - ROMA DIRECT	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	10,859 ft	69.68	ASPHALT	1,348 ft	0 ft
	45 m	3,310 m	66.01		411 m	0 m
25	148 ft	10,859 ft	249.71	ASPHALT	0 ft	0 ft
	45 m	3,310 m	246.04		0 m	0 m
16R	197 ft	12,814 ft	162.66	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.00		0 m	0 m
34L	197 ft	12,814 ft	342.67	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.01		0 m	0 m
16L	197 ft	12,814 ft	162.68	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.01		0 m	0 m
34R	197 ft	12,814 ft	342.69	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.02		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	FEE	110.15 MHz	25 nm	-	-	25 ft
				46 km	-		25 m
34L	DME	ISW	108.90 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
34R	DME	FSS	111.55 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
16L	LOC-ILS	IFLL	108.10 MHz	18 nm	162.69	-	13 ft
				33 km	159.02		13 m
16R	LOC-ILS	IFRR	109.75 MHz	18 nm	162.67	-	13 ft
				33 km	159.00		13 m
25	LOC-ILS	FEE	110.15 MHz	18 nm	249.69	-	13 ft
				33 km	246.02		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34L	LOC-ILS	IFSW	108.90 MHz	18 nm	342.67	-	13 ft
				33 km	339.00		13 m
34R	LOC-ILS	FSS	111.55 MHz	18 nm	342.69	-	13 ft
				33 km	339.02		13 m
16L	GS	IFLL	108.10 MHz	10 nm	162.69	3.00	13 ft
				19 km	159.02		13 m
16R	GS	IFRR	109.75 MHz	10 nm	162.67	3.00	13 ft
				19 km	159.00		13 m
25	GS	FEE	110.15 MHz	10 nm	249.69	3.00	13 ft
				19 km	246.02		13 m
34L	GS	IFSW	108.90 MHz	10 nm	342.67	3.00	13 ft
				19 km	339.00		13 m
34R	GS	FSS	111.55 MHz	10 nm	342.69	3.00	13 ft
				19 km	339.02		13 m