

MYGF

Grand Bahama International


KFLL

Fort Lauderdale-Hollywood Intl

2024/05/18 1624Z

MYGF VALLY PADUS JANUS BONDI JUMAR ZUKED SNAPE ADOTE KFLL

89.73 nm / 166.19 km

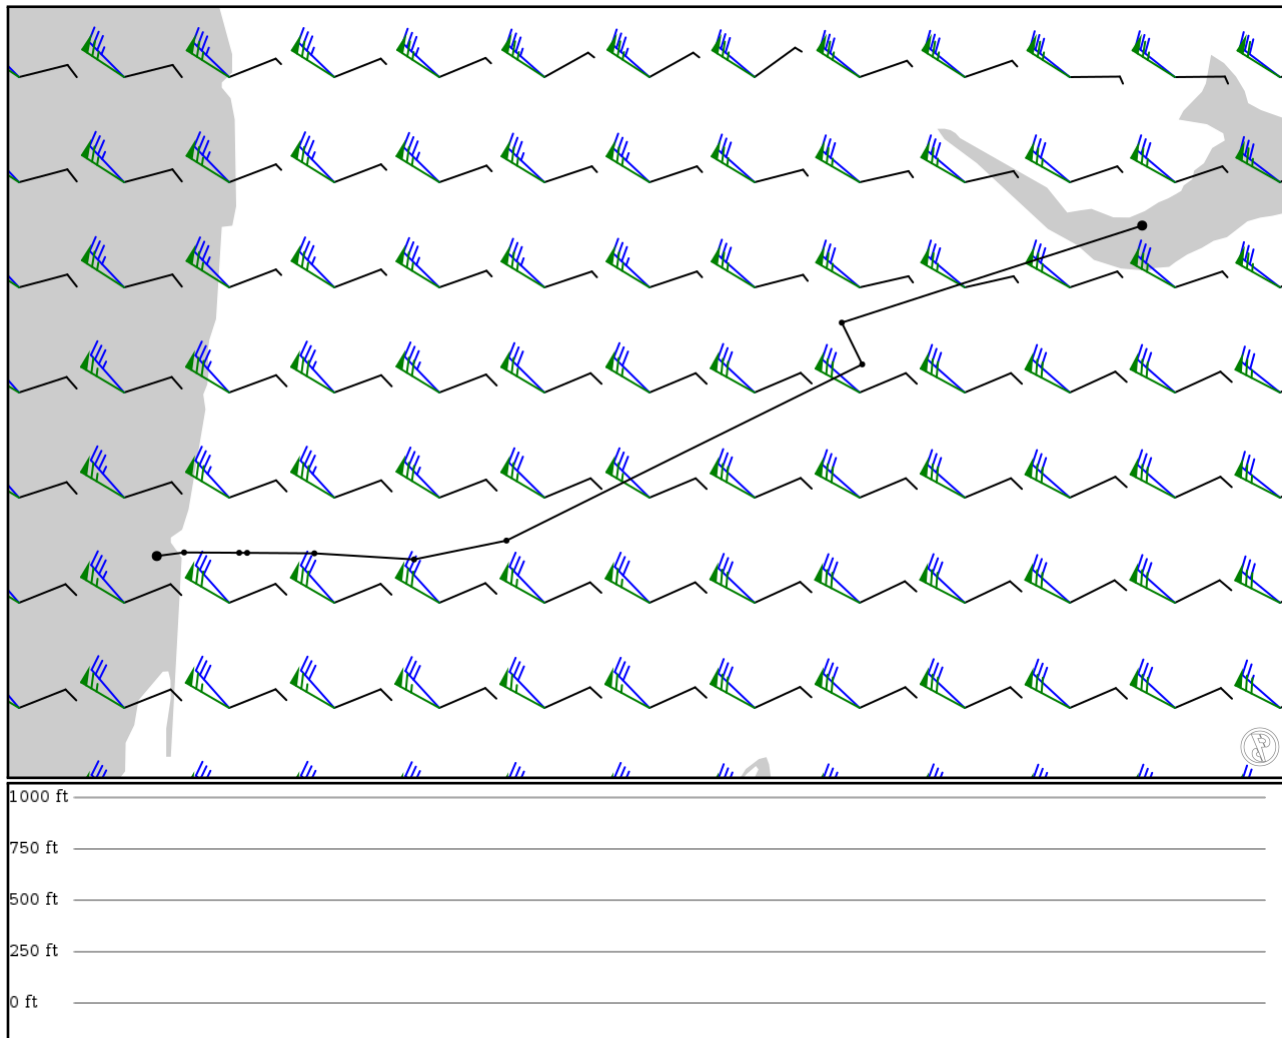

Notes

Requested: MYGF VALLY ZFPNB PADUS JANUS BONDI JUMAR ZUKED SNAPE ADOTE KFLL

Unmatched points: ZFPNB

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
MYGF	-	26.55870	0 ft	-	Grand Bahama International
APT	-	-78.69550	0 m	-	
VALLY	-	26.41550	0 ft	25	-
FIX	-	-79.13880	0 m	-	
PADUS	-	26.35400	0 ft	4	-
FIX	-	-79.10860	0 m	-	
JANUS	-	26.09410	0 ft	32	-
FIX	-	-79.63350	0 m	-	
BONDI	-	26.06630	0 ft	7	-
FIX	-	-79.76980	0 m	-	
JUMAR	-	26.07530	0 ft	7	-
FIX	-	-79.91700	0 m	-	
ZUKED	-	26.07600	0 ft	5	-
FIX	-	-80.01620	0 m	-	
SNAPE	-	26.07610	0 ft	0	-
FIX	-	-80.02790	0 m	-	
ADOTE	-	26.07660	0 ft	4	-
FIX	-	-80.10920	0 m	-	
KFLL	-	26.07130	0 ft	2	Fort Lauderdale-Hollywood Intl
APT	-	-80.14950	0 m	-	

MYGF

Region: BAHAMAS
Timezone: AMERICA/NASSAU
Runways: 1

Elevation: 6 ft / 2 m
Location: 26.558700 -78.695500
Magnetic Var: 8.289 W

METAR

MYGF 181600Z 20009KT 170V240 9999 FEW015 31/25 A3000

TAF

TAF MYGF 181100Z 1812/1912 16006KT 9999 SCT030

Frequencies

GND - 121.70 MHz -
APP - 126.50 MHz -

TWR - 118.50 MHz -
COM - 123.00 MHz - UNICOM

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	151 ft	11,016 ft	60.89	ASPHALT	0 ft	239 ft
	46 m	3,358 m	69.18		0 m	73 m
24	151 ft	11,016 ft	240.91	ASPHALT	0 ft	226 ft
	46 m	3,358 m	249.20		0 m	69 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IZFP	109.70 MHz	18 nm	60.91	-	7 ft
				33 km	69.20		7 m
06	GS	IZFP	109.70 MHz	10 nm	61.80	3.00	7 ft
				19 km	70.09		7 m

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.392 W

METAR

KFLL 181553Z 20010G20KT 160V230 10SM SCT036 34/24 A2997 RMK A02 SLP147 T03390239

TAF

TAF AMD KFLL 181456Z 1815/1918 17011KT P6SM FEW030 SCT050 FM181800 15012G19KT P6SM VCTS SCT030CB BKN050 FM190000 1

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m