

KLAX

Los Angeles Intl


MMUN

Cancun International

2024/06/07 2112Z

KLAX JLI J93 PPE UT11 DEL V42 MOV V2 REX V10 MAM UJ2 ABBOT UT11 ALORI MMUN

1855.91 nm / 3437.14 km

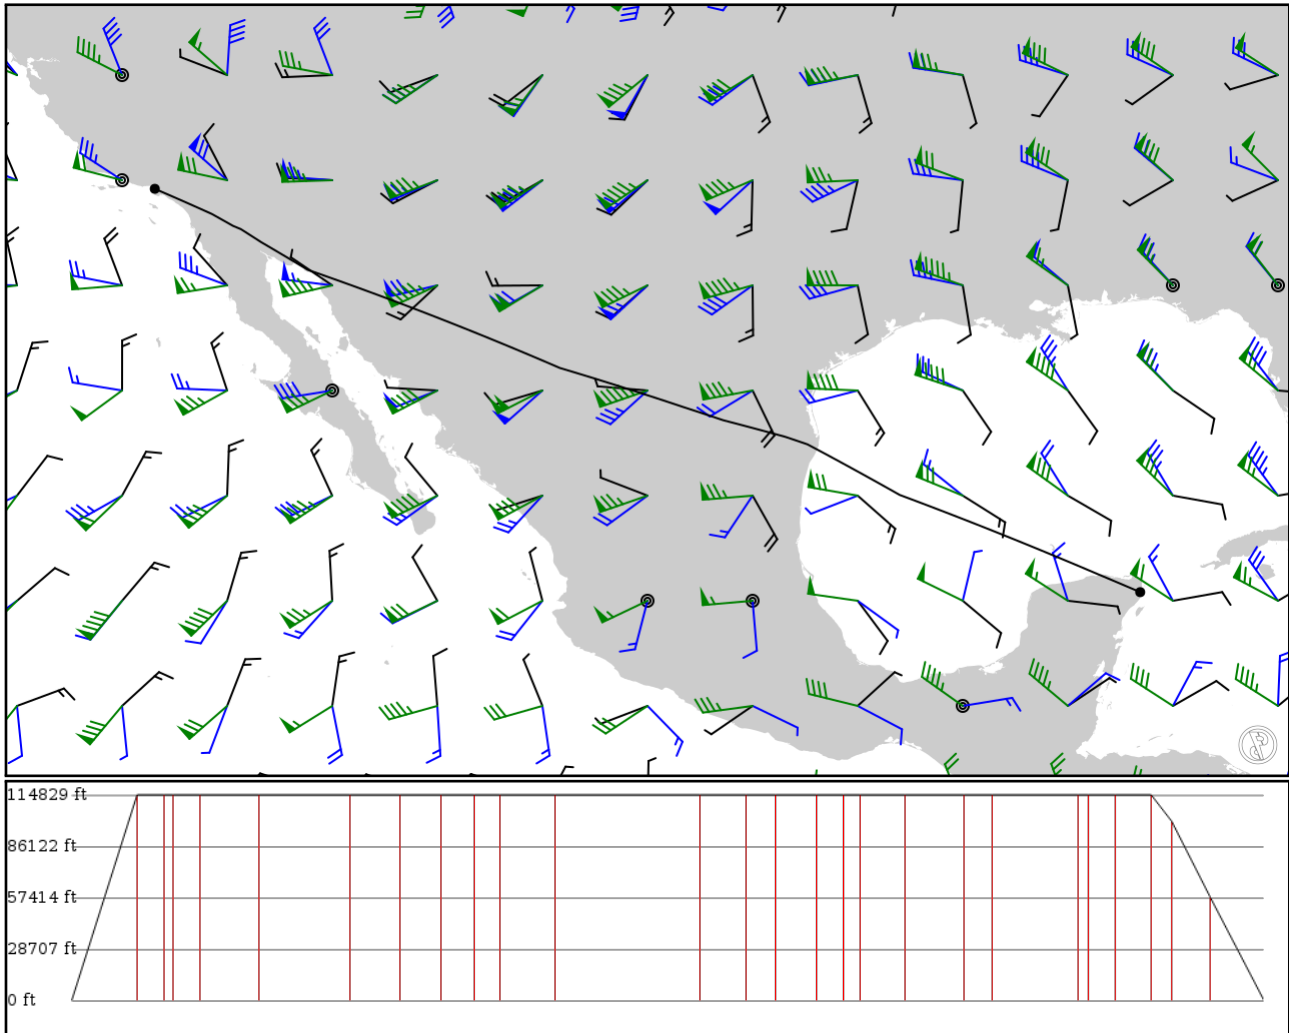

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAX APT	-	33.94313 -118.40892	0 ft 0 m	-	Los Angeles Intl
JLI VOR	-	33.14047 -116.58594	35,000 ft 10,668 m	103	JULIAN VORTAC
GWIRE FIX	J93 AWY-HI	32.75868 -115.90634	35,000 ft 10,668 m	41	-
ASUTA FIX	J93 AWY-HI	32.65258 -115.65292	35,000 ft 10,668 m	14	-
ALTAR FIX	J93 AWY-HI	32.23731 -115.00446	35,000 ft 10,668 m	41	-
PPE VOR	J93 AWY-HI	31.35425 -113.51939	35,000 ft 10,668 m	92	PENASCO VOR-DME
BEXO FIX	UT11 AWY-HI	30.44451 -110.99142	35,000 ft 10,668 m	141	-
XONGO FIX	UT11 AWY-HI	29.91924 -109.61021	35,000 ft 10,668 m	78	-
BIBIN FIX	UT11 AWY-HI	29.48241 -108.50000	35,000 ft 10,668 m	63	-
IMAPA FIX	UT11 AWY-HI	29.11312 -107.58634	35,000 ft 10,668 m	52	-
DUTRO FIX	UT11 AWY-HI	28.83083 -106.90194	35,000 ft 10,668 m	39	-
DEL VOR	UT11 AWY-HI	28.21411 -105.44844	35,000 ft 10,668 m	85	DELICIAS VOR-DME
MOV VOR	V42 AWY-LO	26.95550 -101.47103	35,000 ft 10,668 m	224	MONCLOVA VOR-DME
NOTAL FIX	V2 AWY-LO	26.54185 -100.21863	35,000 ft 10,668 m	71	-
TALBI FIX	V2 AWY-LO	26.32139 -99.37917	35,000 ft 10,668 m	47	-
REX VOR	V2 AWY-LO	26.01064 -98.23186	35,000 ft 10,668 m	64	REYNOSA VOR-DME
MAM VOR	V10 AWY-LO	25.77083 -97.52392	35,000 ft 10,668 m	40	MATAMOROS VOR-DME
RADAS FIX	UJ2 AWY-HI	25.54556 -97.10167	35,000 ft 10,668 m	26	-
TIMAS FIX	UJ2 AWY-HI	24.95211 -96.00689	35,000 ft 10,668 m	69	-
ABBOT FIX	UJ2 AWY-HI	24.15174 -94.56934	35,000 ft 10,668 m	92	-
MATOL FIX	UT11 AWY-HI	23.87774 -93.83947	35,000 ft 10,668 m	43	-
LESI FIX	UT11 AWY-HI	23.00345 -91.58800	35,000 ft 10,668 m	134	-
DURLI FIX	UT11 AWY-HI	22.90306 -91.33667	35,000 ft 10,668 m	15	-
AMIPI FIX	UT11 AWY-HI	22.62583 -90.64889	35,000 ft 10,668 m	41	-
MEDIR FIX	UT11 AWY-HI	22.24639 -89.72361	35,000 ft 10,668 m	56	-
IKURA FIX	UT11 AWY-HI	22.02637 -89.19519	30,500 ft 9,296 m	32	-
ALORI	UT11	21.61258	17,600 ft	59	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	-88.21644	5,364 m		
MMUN	-	21.04229	0 ft	82	Cancun International
APT	-	-86.87333	0 m		

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.434 E

METAR

KLAX 072053Z 24010KT 10SM FEW004 SCT009 BKN018 19/15 A2991 RMK A02 SLP128 T01940150 58004 \$

TAF

TAF AMD KLAX 072008Z 0720/0824 26006KT P6SM BKN015 FM072200 27012KT P6SM BKN015 FM080300 25008KT P6SM OVC008 FM080800 25008KT P6SM BKN015

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.52		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.54	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.54	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.55	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.54	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.54	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.54	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.54	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.55	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.54	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.54	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.55	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.54	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.54	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.54	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.54	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.55	3.00	125 ft 125 m

MMUN

Region: MEXICO
Timezone: AMERICA/CANCUN
Runways: 2

Elevation: 22 ft / 7 m
Location: 21.042100 -86.873500
Magnetic Var: 2.730 W

METAR

UNKNOWN

TAF

TAF MMUN 071608Z 0718/0818 16010KT P6SM SCT015CB TX33/0719Z TN28/0812Z FM072100 16010KT P6SM VC TS BKN015CB TEMPO

Frequencies

REC - 127.70 MHz - ATIS	REC - 122.30 MHz - CANCUN INFO
GND - 121.00 MHz - CANCUN GROUND	GND - 121.70 MHz - CANCUN GROUND
TWR - 118.10 MHz - CANCUN TOWER	TWR - 118.60 MHz - CANCUN TOWER
CLD - 122.10 MHz - CLEARANCE DELIVERY	APP - 124.70 MHz - CANCUN APPROACH
APP - 123.20 MHz - CANCUN ARRIVAL	DEP - 124.20 MHz - CANCUN DEPARTURE
DEP - 123.50 MHz - CANCUN DEPARTURE	GND - 130.50 MHz - GENERAL AVIATION RAMP CONTROL
APP - 125.20 MHz - MERIDA CONTROL	APP - 125.80 MHz - MERIDA CONTROL
APP - 128.00 MHz - MERIDA CONTROL	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	190 ft	11,550 ft	123.85	ASPHALT	0 ft	476 ft
	58 m	3,520 m	126.58		0 m	145 m
30L	190 ft	11,550 ft	303.86	ASPHALT	0 ft	443 ft
	58 m	3,520 m	306.59		0 m	135 m
12L	148 ft	9,189 ft	123.84	ASPHALT	0 ft	72 ft
	45 m	2,801 m	126.57		0 m	22 m
30R	148 ft	9,189 ft	303.84	ASPHALT	0 ft	98 ft
	45 m	2,801 m	306.57		0 m	30 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	INCP	110.70 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
12R	DME	ICUN	111.10 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
12L	LOC-ILS	INCP	110.70 MHz	18 nm	123.84	-	21 ft
				33 km	126.57		21 m
12R	LOC-ILS	ICUN	111.10 MHz	18 nm	123.85	-	21 ft
				33 km	126.58		21 m
12L	GS	INCP	110.70 MHz	10 nm	123.84	3.00	21 ft
				19 km	126.57		21 m
12R	GS	ICUN	111.10 MHz	10 nm	123.85	3.00	21 ft
				19 km	126.58		21 m