


2024/05/06 0154Z

KEWR LACIE **V147** ULW **V36** BURST CYYZ

303.31 nm / 561.73 km

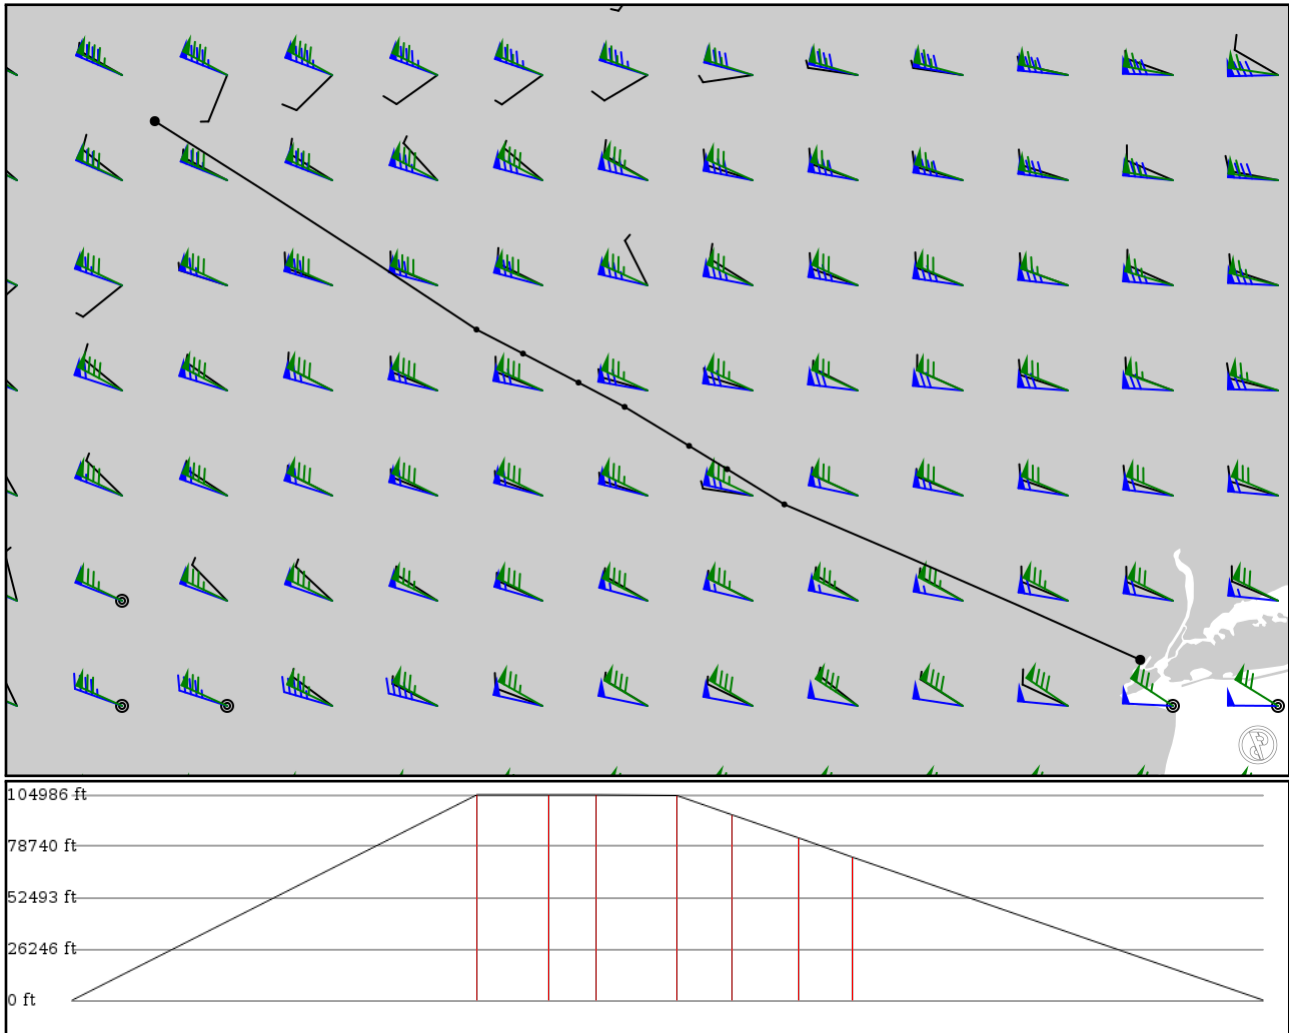

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 32000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KEWR APT	-	40.69360 -74.16860	0 ft 0 m	-	Newark Liberty International
LACIE FIX	-	41.55420 -76.14010	32,000 ft 9,754 m	103	-
TWIIN FIX	V147 AWY-LO	41.74940 -76.45700	32,000 ft 9,754 m	18	-
BIPOD FIX	V147 AWY-LO	41.87820 -76.66780	32,000 ft 9,754 m	12	-
ULW VOR	V147 AWY-LO	42.09420 -77.02480	31,900 ft 9,723 m	20	ELMIRA
THINK FIX	V36 AWY-LO	42.22870 -77.28030	28,900 ft 8,809 m	13	-
HORNE FIX	V36 AWY-LO	42.38920 -77.58780	25,300 ft 7,711 m	16	-
BURST FIX	V36 AWY-LO	42.52230 -77.84540	22,300 ft 6,797 m	13	-
CYYZ APT	-	43.67610 -79.62770	0 ft 0 m	104	Toronto Pearson Intl

KEWR

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 17 ft / 5 m
Location: 40.693600 -74.168600
Magnetic Var: 12.651 W

METAR

KEWR 060051Z 11003KT 7SM OVC005 12/11 A3015 RMK A02 RAE50 SLP208 P0000 T01170106

TAF

TAF KEWR 052326Z 0600/0706 12008KT 5SM -SHRA BR OVC007 FM060300 16008KT 3SM -SHRA BR OVC005 FM060800 20006KT 3SM B

Frequencies

REC - 115.70 MHz - D-ATIS	REC - 134.82 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.85 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - NEWARK GROUND	GND - 126.15 MHz - NEWARK GROUND
GND - 132.45 MHz - RAMP CONTROL	TWR - 118.30 MHz - NEWARK TOWER
TWR - 134.05 MHz - NEWARK TOWER	APP - 127.60 MHz - NEW YORK APPROACH
APP - 128.55 MHz - NEW YORK APPROACH	APP - 132.70 MHz - NEW YORK APPROACH
APP - 132.80 MHz - NEW YORK APPROACH	DEP - 119.20 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	11,011 ft	25.75	ASPHALT	2,539 ft	610 ft
	46 m	3,356 m	38.40		774 m	186 m
22R	150 ft	11,011 ft	205.76	ASPHALT	1,440 ft	0 ft
	46 m	3,356 m	218.41		439 m	0 m
04R	150 ft	10,009 ft	25.74	ASPHALT	1,191 ft	299 ft
	46 m	3,051 m	38.39		363 m	91 m
22L	150 ft	10,009 ft	205.75	ASPHALT	1,791 ft	0 ft
	46 m	3,051 m	218.40		546 m	0 m
11	150 ft	6,732 ft	95.00	ASPHALT	0 ft	505 ft
	46 m	2,052 m	107.65		0 m	154 m
29	150 ft	6,732 ft	275.02	ASPHALT	223 ft	0 ft
	46 m	2,052 m	287.67		68 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IEWR	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04R	DME	IEZA	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22L	DME	ILSQ	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22R	DME	IJNN	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04L	LOC-ILS	IEWR	110.75 MHz	18 nm	25.76	-	17 ft
				33 km	38.41		17 m
04R	LOC-ILS	IEZA	108.70 MHz	18 nm	25.75	-	17 ft
				33 km	38.40		17 m
11	LOC-ILS	IGPR	109.15 MHz	18 nm	95.01	-	17 ft
				33 km	107.66		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	LOC-ILS	ILSQ	108.70 MHz	18 nm	205.75	-	17 ft
				33 km	218.40		17 m
22R	LOC-ILS	IJNN	110.75 MHz	18 nm	205.76	-	17 ft
				33 km	218.41		17 m
04L	GS	IEWR	110.75 MHz	10 nm	25.76	3.00	17 ft
				19 km	38.41		17 m
04R	GS	IEZA	108.70 MHz	10 nm	25.75	3.00	17 ft
				19 km	38.40		17 m
11	GS	IGPR	109.15 MHz	10 nm	95.01	3.00	17 ft
				19 km	107.66		17 m
22L	GS	ILSQ	108.70 MHz	10 nm	205.75	3.00	17 ft
				19 km	218.40		17 m
22R	GS	IJNN	110.75 MHz	10 nm	205.76	3.00	17 ft
				19 km	218.41		17 m

CYYZ

Region: CANADA
Timezone: AMERICA/TORONTO
Runways: 5

Elevation: 564 ft / 172 m
Location: 43.676100 -79.627700
Magnetic Var: 10.261 W

METAR

CYYZ 060100Z 20004KT 15SM FEW045 FEW260 14/14 A3000 RMK SC1CI1 SLP162

TAF

TAF CYYZ 052340Z 0600/0706 03008KT P6SM SCT020 BKN040 TEMPO 0600/0603 BKN020 FM060300 36008KT P6SM FEW020 RMK NXT

Frequencies

TWR - 118.35 MHz - TORONTO TOWER	TWR - 118.70 MHz - TORONTO TOWER
GND - 119.10 MHz - TORONTO GROUND	GND - 121.65 MHz - TORONTO GROUND
GND - 121.90 MHz - TORONTO GROUND	REC - 120.82 MHz - ATIS
REC - 133.10 MHz - ATIS	CLD - 121.30 MHz - CLEARANCE DELIVERY
APP - 132.80 MHz - TORONTO APPROACH	APP - 124.47 MHz - TORONTO APPROACH
APP - 125.40 MHz - TORONTO APPROACH	APP - 123.27 MHz - LONDON RADIO
DEP - 127.57 MHz - TORONTO DEPARTURE	DEP - 128.80 MHz - TORONTO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	9,707 ft	46.43	ASPHALT	0 ft	131 ft
	60 m	2,959 m	56.69		0 m	40 m
24R	197 ft	9,707 ft	226.45	ASPHALT	194 ft	98 ft
	60 m	2,959 m	236.71		59 m	30 m
06R	197 ft	9,007 ft	46.43	ASPHALT	0 ft	95 ft
	60 m	2,745 m	56.69		0 m	29 m
24L	197 ft	9,007 ft	226.45	ASPHALT	0 ft	95 ft
	60 m	2,745 m	236.71		0 m	29 m
05	197 ft	11,128 ft	46.39	ASPHALT	141 ft	141 ft
	60 m	3,392 m	56.65		43 m	43 m
23	197 ft	11,128 ft	226.41	ASPHALT	492 ft	141 ft
	60 m	3,392 m	236.67		150 m	43 m
15L	197 ft	11,061 ft	136.64	ASPHALT	0 ft	92 ft
	60 m	3,372 m	146.90		0 m	28 m
33R	197 ft	11,061 ft	316.66	ASPHALT	0 ft	89 ft
	60 m	3,372 m	326.92		0 m	27 m
15R	197 ft	9,097 ft	136.62	ASPHALT	597 ft	0 ft
	60 m	2,773 m	146.88		182 m	0 m
33L	197 ft	9,097 ft	316.64	ASPHALT	591 ft	0 ft
	60 m	2,773 m	326.90		180 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24L	DME	IIDP	111.95 MHz	18 nm	-	-	568 ft
				33 km	-		568 m
24R	DME	INV	109.30 MHz	18 nm	-	-	546 ft
				33 km	-		546 m
05	LOC-ILS	ITX	109.70 MHz	18 nm	46.40	-	564 ft
				33 km	56.66		564 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IJS	109.10 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
06R	LOC-ILS	ICV	111.95 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
15L	LOC-ILS	IRW	110.50 MHz	18 nm 33 km	136.65 146.91	-	564 ft 564 m
15R	LOC-ILS	ILP	110.95 MHz	18 nm 33 km	136.63 146.89	-	564 ft 564 m
23	LOC-ILS	IYZ	111.50 MHz	18 nm 33 km	226.40 236.66	-	564 ft 564 m
24L	LOC-ILS	IDP	111.95 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
24R	LOC-ILS	INV	109.30 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
33L	LOC-ILS	ITO	110.95 MHz	18 nm 33 km	316.63 326.89	-	564 ft 564 m
33R	LOC-ILS	ILE	110.30 MHz	18 nm 33 km	316.65 326.91	-	564 ft 564 m
05	GS	ITX	109.70 MHz	10 nm 19 km	46.40 56.66	3.00	564 ft 564 m
06L	GS	IJS	109.10 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
06R	GS	ICV	111.95 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
15L	GS	IRW	110.50 MHz	10 nm 19 km	136.65 146.91	3.00	564 ft 564 m
15R	GS	ILP	110.95 MHz	10 nm 19 km	136.63 146.89	3.00	564 ft 564 m
23	GS	IYZ	111.50 MHz	10 nm 19 km	226.40 236.66	3.00	564 ft 564 m
24L	GS	IIDP	111.95 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
24R	GS	INV	109.30 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
33L	GS	ITO	110.95 MHz	10 nm 19 km	316.63 326.89	3.00	564 ft 564 m
33R	GS	ILE	110.30 MHz	10 nm 19 km	316.65 326.91	3.00	564 ft 564 m