

WSSS

Singapore Changi Intl


VHHH

Hong Kong Intl

2024/05/23 0356Z

WSSS RAXIM **M771** DUMOL **J103** ISBAN VHHH

1444.65 nm / 2675.49 km

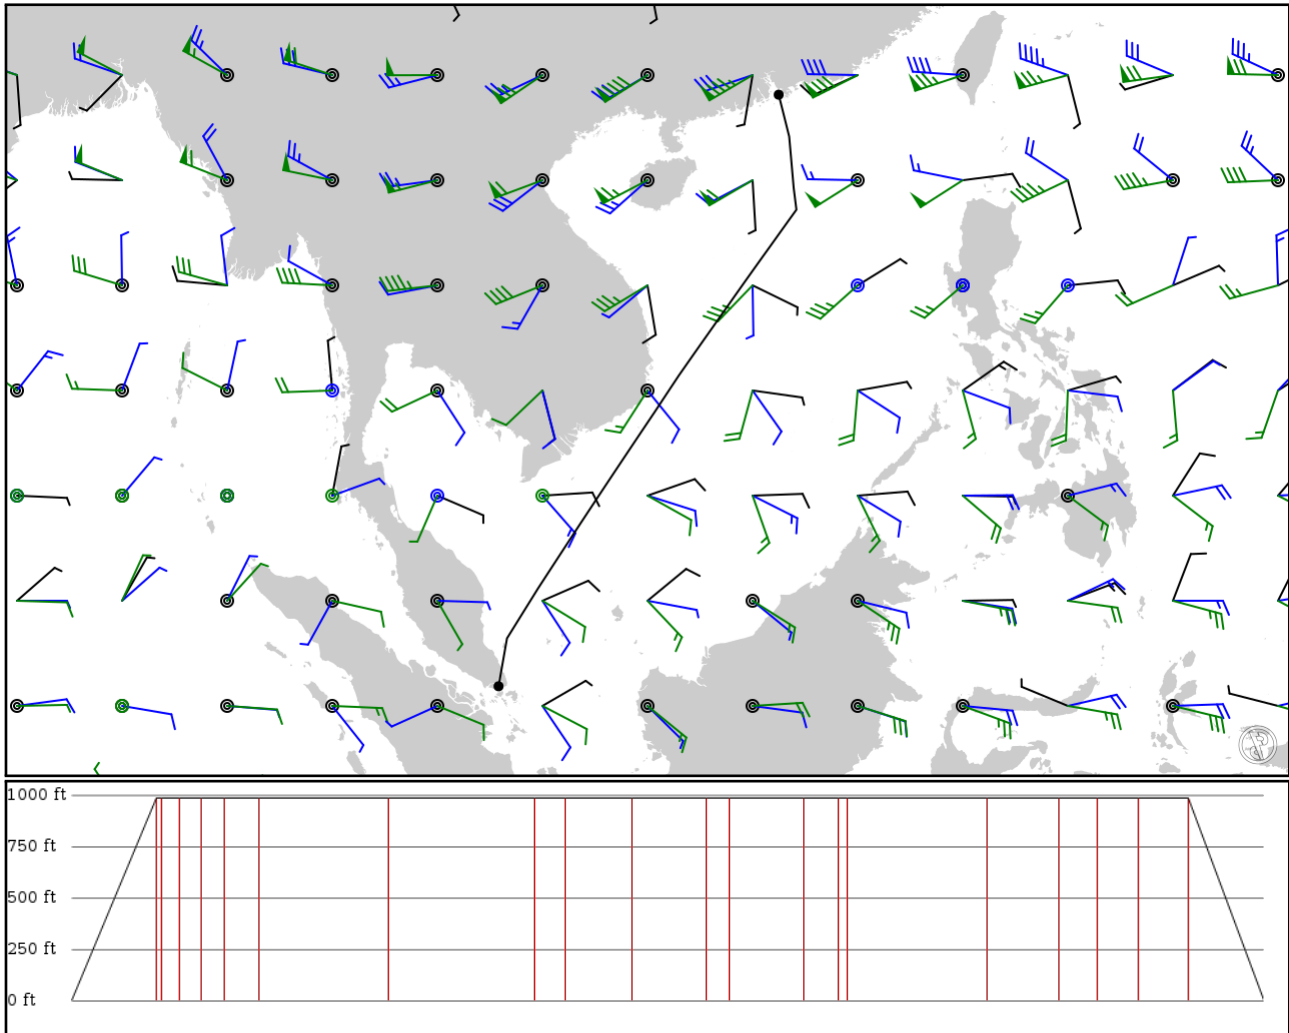

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 330ft
- Cruise Speed: 250kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WSSS	-	1.35551	0 ft	-	Singapore Changi Intl
APT	-	103.98800	0 m	-	
RAXIM	-	3.05500	300 ft	103	-
FIX	-	104.28700	91 m	-	-
OTLON	M771	3.13111	300 ft	5	-
FIX	AWY-HI	104.33500	91 m	-	-
VISAT	M771	3.43889	300 ft	21	-
FIX	AWY-HI	104.52600	91 m	-	-
DUBSA	M771	3.81694	300 ft	26	-
FIX	AWY-HI	104.76100	91 m	-	-
DAMOG	M771	4.20694	300 ft	27	-
FIX	AWY-HI	105.00400	91 m	-	-
DOLOX	M771	4.81139	300 ft	42	-
FIX	AWY-HI	105.38000	91 m	-	-
DUDIS	M771	7.00000	300 ft	156	-
FIX	AWY-HI	106.80900	91 m	-	-
DAGAG	M771	9.46333	300 ft	176	-
FIX	AWY-HI	108.44200	91 m	-	-
SUDUN	M771	9.99278	300 ft	38	-
FIX	AWY-HI	108.79600	91 m	-	-
DAMVO	M771	11.10830	300 ft	80	-
FIX	AWY-HI	109.54500	91 m	-	-
DOXAR	M771	12.36670	300 ft	90	-
FIX	AWY-HI	110.37800	91 m	-	-
NITOM	M771	12.74190	300 ft	27	-
FIX	AWY-HI	110.64000	91 m	-	-
DAMEL	M771	13.97830	300 ft	89	-
FIX	AWY-HI	111.51000	91 m	-	-
34BC	M771	14.56670	300 ft	42	-
FIX	AWY-HI	111.92500	91 m	-	-
DONDA	M771	14.70330	300 ft	9	-
FIX	AWY-HI	112.02200	91 m	-	-
DOSUT	M771	17.03330	300 ft	169	-
FIX	AWY-HI	113.68000	91 m	-	-
DULOP	M771	18.23670	300 ft	87	-
FIX	AWY-HI	114.54300	91 m	-	-
DUMOL	M771	19.00000	300 ft	46	-
FIX	AWY-HI	114.44700	91 m	-	-
ARROW	J103	19.83590	300 ft	50	-
FIX	AWY-HI	114.37400	91 m	-	-
ISBAN	J103	20.82620	300 ft	59	-
FIX	AWY-HI	114.28700	91 m	-	-
VHHH	-	22.30890	0 ft	91	Hong Kong Intl
APT	-	113.91500	0 m	-	

WSSS

Region: SINGAPORE

Timezone: ASIA/SINGAPORE

Runways: 2

Elevation: 20 ft / 6 m

Location: 1.355510 103.988000

Magnetic Var: 0.198 E

METAR

WSSS 230330Z 17005KT 9999 FEW018TCU SCT030 BKN160 30/26 Q1009 NOSIG

TAF

TAF WSSS 222300Z 2300/2406 15007KT 9999 FEW015 SCT020 TEMPO 2306/2309 3000 TSRA FEW012CB BKN015

Frequencies

DEP - 123.70 MHz - SINGAPORE RADAR	DEP - 127.30 MHz - SINGAPORE RADAR
DEP - 133.80 MHz - SINGAPORE RADAR	DEP - 133.25 MHz - SINGAPORE RADAR
DEP - 135.80 MHz - SINGAPORE RADAR	DEP - 134.20 MHz - SINGAPORE RADAR
DEP - 133.35 MHz - SINGAPORE RADAR	DEP - 134.40 MHz - SINGAPORE RADAR
DEP - 128.10 MHz - SINGAPORE RADAR	DEP - 255.40 MHz - SINGAPORE RADAR
DEP - 124.05 MHz - SINGAPORE RADAR	APP - 120.30 MHz - SINGAPORE APPROACH
APP - 124.60 MHz - SINGAPORE APPROACH	APP - 119.30 MHz - SINGAPORE ARRIVAL
TWR - 118.60 MHz - SINGAPORE TOWER	TWR - 118.25 MHz - SINGAPORE TOWER
GND - 124.30 MHz - SINGAPORE GROUND	GND - 121.72 MHz - SINGAPORE GROUND
GND - 121.85 MHz - SINGAPORE GROUND	GND - 121.00 MHz - SINGAPORE GROUND EMERGENCY
GND - 122.55 MHz - SINGAPORE GROUND	CLD - 121.65 MHz - SINGAPORE DELIVERY
CLD - 119.60 MHz - SINGAPORE DELIVERY	REC - 128.60 MHz -
REC - 128.02 MHz -	CHANGI AIRPORT INFORMATION (D-ATIS)
CHANGI AIRPORT ARRIVAL INFORMATION	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02L	197 ft	13,187 ft	22.88	ASPHALT	0 ft	0 ft
	60 m	4,020 m	22.68		0 m	0 m
20R	197 ft	13,187 ft	202.88	ASPHALT	2,428 ft	390 ft
	60 m	4,020 m	202.68		740 m	119 m
02C	197 ft	13,187 ft	22.88	ASPHALT	0 ft	0 ft
	60 m	4,020 m	22.68		0 m	0 m
20C	197 ft	13,187 ft	202.88	ASPHALT	0 ft	0 ft
	60 m	4,020 m	202.68		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02C	DME	ICE	108.30 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
02L	DME	ICW	110.90 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
20C	DME	ICC	109.70 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
20R	DME	ICH	108.90 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
02C	LOC-ILS	ICE	108.30 MHz	18 nm	22.88	-	20 ft
				33 km	22.68		20 m
02L	LOC-ILS	ICW	110.90 MHz	18 nm	22.88	-	20 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	22.68		20 m
20C	LOC-ILS	ICC	109.70 MHz	18 nm	202.88	-	20 ft
				33 km	202.68		20 m
20R	LOC-ILS	ICH	108.90 MHz	18 nm	202.88	-	20 ft
				33 km	202.68		20 m
02C	GS	ICE	108.30 MHz	10 nm	22.88	3.00	20 ft
				19 km	22.68		20 m
02L	GS	ICW	110.90 MHz	10 nm	22.88	3.00	20 ft
				19 km	22.68		20 m
20C	GS	ICC	109.70 MHz	10 nm	202.88	3.00	20 ft
				19 km	202.68		20 m
20R	GS	ICH	108.90 MHz	10 nm	202.88	3.00	20 ft
				19 km	202.68		20 m

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.240 W

METAR

VHHH 230330Z 09007KT 060V140 9999 -SHRA FEW007 SCT030 28/24 Q1010 NOSIG

TAF

TAF VHHH 230200Z 2303/2409 12010KT 9999 FEW010 SCT025 TX29/2306Z TX28/2406Z TN25/2322Z TEMPO 2303/2306 24010KT 40

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m