

# KFLL

Fort Lauderdale Hollywood Intl


# KLGA

La Guardia

2024/05/10 2205Z

KFLL PERMT **AR16** SEELO **AR19** DIW **J174** ORF **J121** SAWED **J209** VILLS KLGA

951.95 nm / 1763.01 km

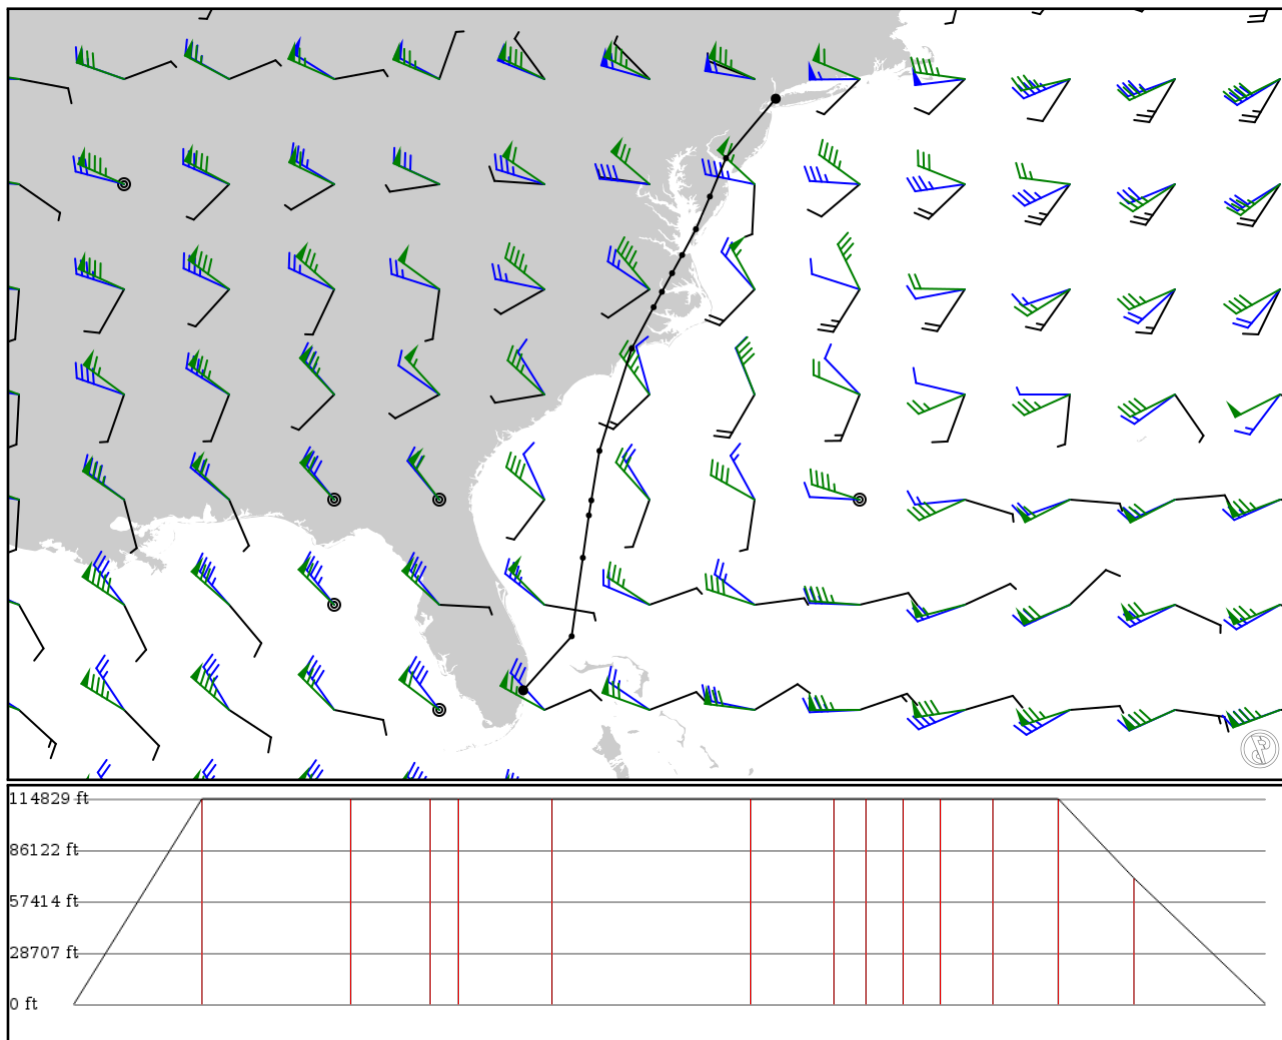

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFLL APT	-	26.07164 -80.15269	0 ft 0 m	-	Fort Lauderdale Hollywood Intl
PERMT FIX	-	27.41420 -78.94727	35,000 ft 10,668 m	103	-
LEND5 FIX	AR16 AWY-HI	29.36594 -78.67010	35,000 ft 10,668 m	118	-
SNABS FIX	AR16 AWY-HI	30.42036 -78.52036	35,000 ft 10,668 m	63	-
EMCEE FIX	AR16 AWY-HI	30.79273 -78.45917	35,000 ft 10,668 m	22	-
SEELO FIX	AR16 AWY-HI	32.02341 -78.25695	35,000 ft 10,668 m	74	-
DIW NDB	AR19 AWY-HI	34.56853 -77.45294	35,000 ft 10,668 m	158	DIXON NDB
CLAPY FIX	J174 AWY-HI	35.59472 -76.90953	35,000 ft 10,668 m	67	-
GILMA FIX	J174 AWY-HI	35.97672 -76.70337	35,000 ft 10,668 m	25	-
EDDYS FIX	J174 AWY-HI	36.44044 -76.45011	35,000 ft 10,668 m	30	-
ORF VOR	J174 AWY-HI	36.89189 -76.20033	35,000 ft 10,668 m	29	NORFOLK VORTAC
SAWED FIX	J121 AWY-HI	37.53354 -75.85808	35,000 ft 10,668 m	41	-
SBY VOR	J209 AWY-HI	38.34500 -75.51058	35,000 ft 10,668 m	51	SALISBURY VORTAC
VILLS FIX	J209 AWY-HI	39.30107 -75.11052	21,500 ft 6,553 m	60	-
KLGA APT	-	40.77724 -73.87261	0 ft 0 m	105	La Guardia

## KFLL

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 2

Elevation: 65 ft / 20 m  
Location: 26.071300 -80.149500  
Magnetic Var: 7.390 W

## METAR

KFLL 102053Z 13014KT 10SM BKN065 BKN150 BKN250 32/24 A2983 RMK A02 SLP101 T03170239 58014

## TAF

TAF AMD KFLL 102105Z 1021/1124 12012KT P6SM SCT030 SCT050 FM110100 21007KT P6SM SCT035 SCT250 FM110600 VRB04KT P6SM

## Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m

## KLGA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 2

Elevation: 21 ft / 6 m  
Location: 40.777200 -73.872600  
Magnetic Var: 12.802 W

## METAR

KLGA 102051Z 07009KT 10SM -RA FEW026 OVC050 12/04 A2979 RMK A02 RAB24 SLP088 P0000 60000 T01170044 53005

## TAF

KLGA 101942Z 1020/1124 05010KT P6SM -SHRA OVC030 FM110300 02009KT P6SM BKN045 FM111500 07009KT P6SM SCT045 FM1119

## Frequencies

REC - 125.95 MHz - ATIS ARRIVAL	REC - 127.05 MHz - ATIS DEPARTURE
TWR - 118.70 MHz - LAGUARDIA TOWER	GND - 121.70 MHz - LAGUARDIA GROUND
GND - 121.85 MHz - LAGUARDIA GROUND	GND - 127.67 MHz - LAGUARDIA GROUND
CLD - 121.87 MHz - LAGUARDIA CLEARANCE	CLD - 135.20 MHz - LAGUARDIA CLEARANCE
COM - 122.95 MHz - LAGUARDIA UNICOM	APP - 132.70 MHz - NEW YORK APPROACH
APP - 120.05 MHz - NEW YORK APPROACH	APP - 120.80 MHz - NEW YORK APPROACH
APP - 124.95 MHz - NEW YORK APPROACH	APP - 127.30 MHz - NEW YORK APPROACH
APP - 128.80 MHz - NEW YORK APPROACH	DEP - 120.40 MHz - NEW YORK DEPARTURE
DEP - 124.45 MHz - NEW YORK DEPARTURE	DEP - 127.05 MHz - NEW YORK DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	150 ft	7,006 ft	32.03	ASPHALT	0 ft	322 ft
	46 m	2,135 m	44.83		0 m	98 m
22	150 ft	7,006 ft	212.04	ASPHALT	0 ft	98 ft
	46 m	2,135 m	224.84		0 m	30 m
13	150 ft	6,994 ft	122.24	ASPHALT	0 ft	95 ft
	46 m	2,132 m	135.04		0 m	29 m
31	150 ft	6,994 ft	302.25	ASPHALT	0 ft	374 ft
	46 m	2,132 m	315.06		0 m	114 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
13	DME	IGDI	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
31	DME	IPZV	108.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
04	LOC-ILS	ILGA	110.50 MHz	18 nm	32.04	-	21 ft
				33 km	44.84		21 m
13	LOC-ILS	IGDI	108.50 MHz	18 nm	122.25	-	21 ft
				33 km	135.05		21 m
22	LOC-ILS	IURD	110.50 MHz	18 nm	212.04	-	21 ft
				33 km	224.84		21 m
31	LOC-LOC	IPZV	108.50 MHz	18 nm	302.25	-	21 ft
				33 km	315.05		21 m
04	GS	ILGA	110.50 MHz	10 nm	32.04	3.10	21 ft
				19 km	44.84		21 m
13	GS	IGDI	108.50 MHz	10 nm	122.25	3.10	21 ft
				19 km	135.05		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	GS	IURD	110.50 MHz	10 nm	212.04	3.00	21 ft
				19 km	224.84		21 m