


2024/05/09 0539Z

LIPE IXUSI **UZ805** BOL **UN737** ROTUN **UM727** CORAD LICJ

393.05 nm / 727.93 km

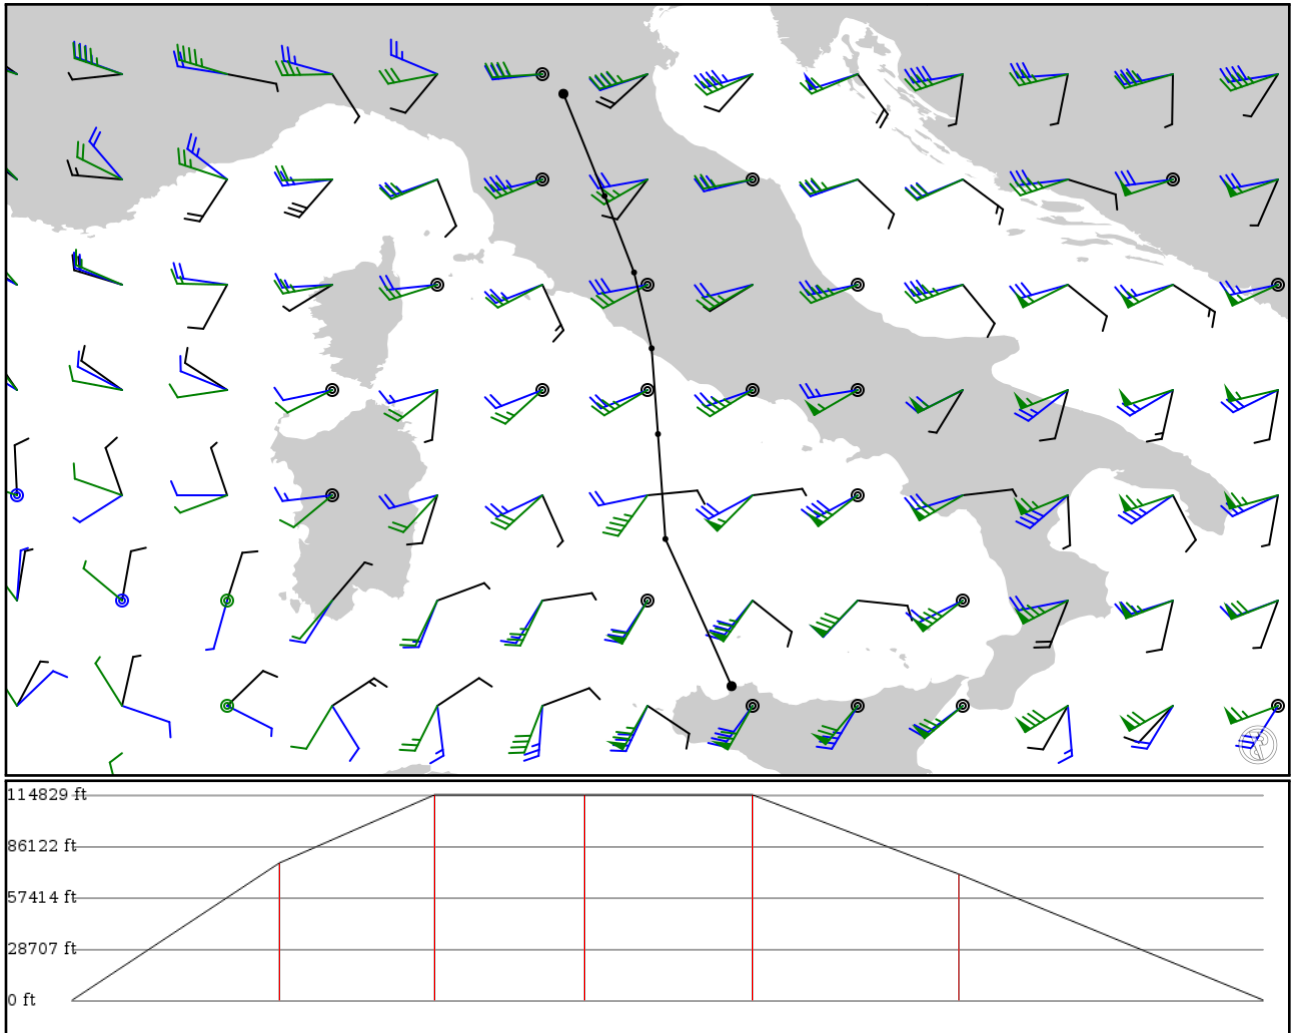

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIPE APT	-	44.53545 11.28866	0 ft 0 m	-	BOLOGNA
IXUSI FIX	-	43.43861 11.73083	23,400 ft 7,132 m	68	-
BOL VOR	UZ805 AWY-HI	42.61833 12.04861	35,000 ft 10,668 m	51	BOLSENA VORTAC
OST VOR	UN737 AWY-HI	41.80388 12.23750	35,000 ft 10,668 m	49	OSTIA VOR-DME
ROTUN FIX	UN737 AWY-HI	40.88333 12.30556	35,000 ft 10,668 m	55	-
CORAD FIX	UM727 AWY-HI	39.75694 12.38528	21,500 ft 6,553 m	67	-
LICJ APT	-	38.17738 13.09704	0 ft 0 m	100	PALERMO

LIPE

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 123 ft / 37 m
Location: 44.535600 11.288300
Magnetic Var: 3.631 E

METAR

LIPE 090450Z 30003KT 9999 BKN020 15/13 Q1018

TAF

TAF LIPE 082300Z 0900/0924 VRB05KT 9999 SCT060

Frequencies

REC - 134.87 MHz - ATIS
TWR - 120.80 MHz - BOLOGNA TOWER
APP - 129.90 MHz - BOLOGNA APPROACH
GND - 129.92 MHz - BOLOGNA GROUND
APP - 120.10 MHz - BOLOGNA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	9,206 ft	116.79	ASPHALT	1,017 ft	243 ft
	45 m	2,806 m	113.15		310 m	74 m
30	148 ft	9,206 ft	296.81	ASPHALT	1,188 ft	180 ft
	45 m	2,806 m	293.18		362 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	DME	BLN	108.90 MHz	18 nm	-	-	131 ft
				33 km	-		131 m
30	DME	IBBP	109.75 MHz	18 nm	-	-	123 ft
				33 km	-		123 m
12	LOC-ILS	BLN	108.90 MHz	18 nm	116.81	-	123 ft
				33 km	113.18		123 m
30	LOC-ILS	IBBP	109.75 MHz	18 nm	296.66	-	123 ft
				33 km	293.03		123 m
12	GS	BLN	108.90 MHz	10 nm	117.59	3.00	120 ft
				19 km	113.96		120 m
30	GS	IBBP	109.75 MHz	10 nm	297.75	3.50	123 ft
				19 km	294.12		123 m

LICJ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 63 ft / 19 m
Location: 38.177500 13.097200
Magnetic Var: 3.574 E

METAR

LICJ 090450Z 06005KT 9999 SCT020 BKN030 15/13 Q1011 RERA

TAF

TAF LICJ 082300Z 0900/0924 VRB05KT 9999 SCT040 TEMPO 0900/0914 4000 SHRA BECMG 0906/0908 02013KT BECMG 0919/0921 V

Frequencies

GND - 121.62 MHz - RAISI GROUND
APP - 120.20 MHz - PALERMO APPROACH
REC - 123.87 MHz - ATIS

TWR - 119.05 MHz - RAISI TOWER
APP - 118.65 MHz - PALERMO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	6,791 ft	23.79	ASPHALT	0 ft	0 ft
	45 m	2,070 m	20.22		0 m	0 m
20	148 ft	6,791 ft	203.80	ASPHALT	0 ft	0 ft
	45 m	2,070 m	200.23		0 m	0 m
07	197 ft	10,922 ft	66.82	ASPHALT	404 ft	577 ft
	60 m	3,329 m	63.25		123 m	176 m
25	197 ft	10,922 ft	246.84	ASPHALT	669 ft	302 ft
	60 m	3,329 m	243.27		204 m	92 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20	DME	ITO	110.55 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
25	DME	RAI	109.50 MHz	18 nm	-	-	65 ft
				33 km	-		65 m
20	LOC-ILS	ITO	110.55 MHz	18 nm	203.92	-	64 ft
				33 km	200.35		64 m
25	LOC-ILS	RAI	109.50 MHz	18 nm	246.80	-	64 ft
				33 km	243.23		64 m
20	GS	ITO	110.55 MHz	10 nm	203.92	3.00	64 ft
				19 km	200.35		64 m
25	GS	RAI	109.50 MHz	10 nm	246.80	3.00	64 ft
				19 km	243.23		64 m