


2024/05/13 1956Z

VHHH OCEAN NOMAN MIKIN LIMLE 1700N14000E TERYY 1800N15000E 1900N16000E 2000N17000E 2000N18000E
2000N17000W CHOKO PHNL

5108.81 nm / 9461.51 km

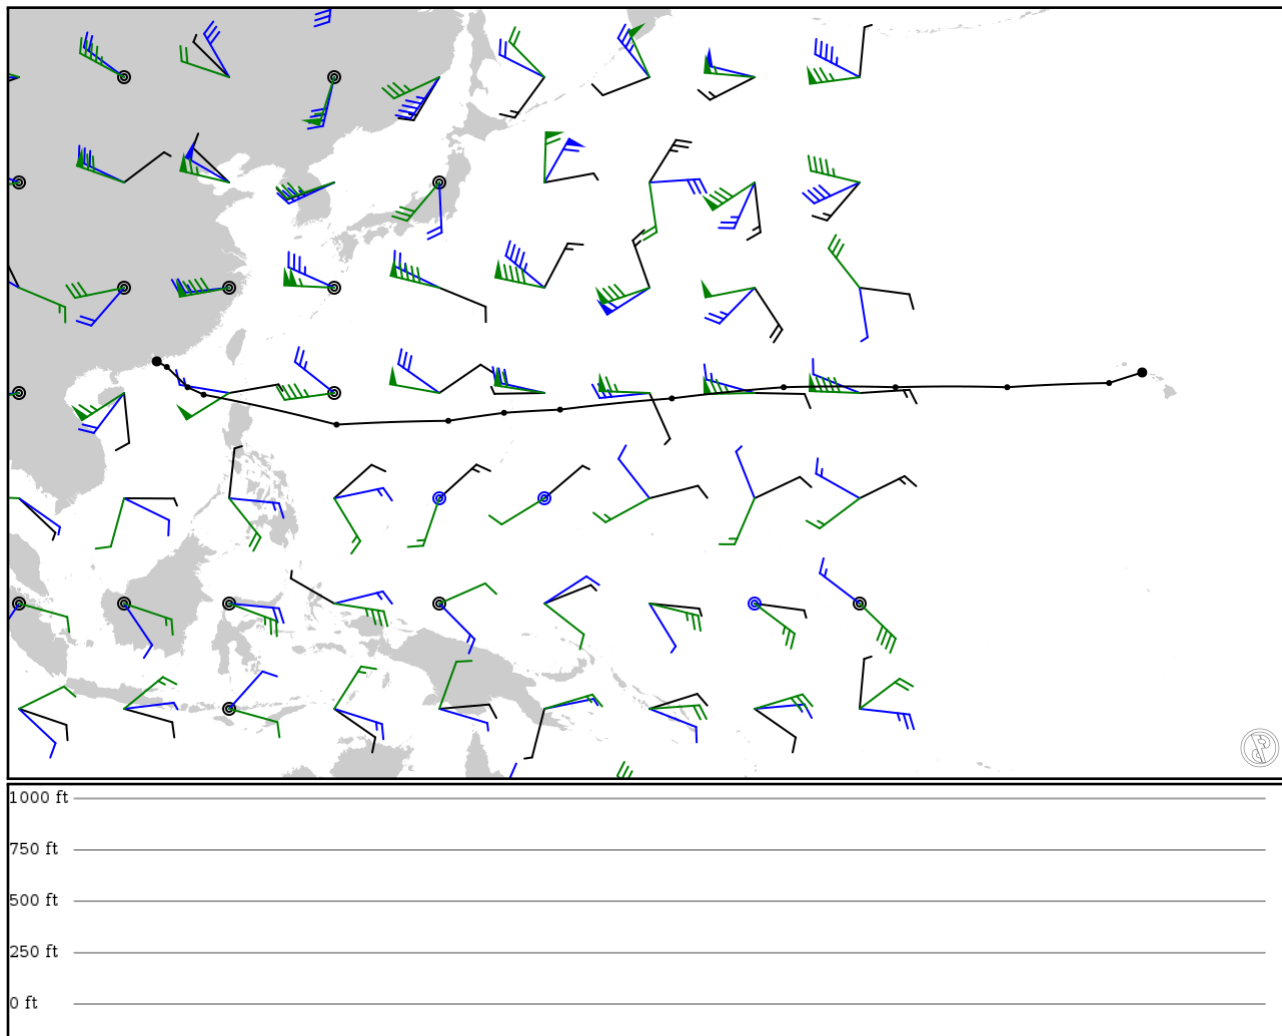

Notes

Requested: VHHH OCEAN V4 NOMAN M501 MIKIN M501 LIMLE 1700N 14000E TERYY 1800N 15000E 1900N 16000E 2000N 17000E 2000N 17000W CHOKO PHNL

Unmatched points: M501 M501 OPACA4

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VHHH	-	22.30899	0 ft	-	Hong Kong Intl
APT	-	113.91461	0 m	-	
OCEAN	-	21.81194	0 ft	58	-
FIX	-	114.81333	0 m	-	-
NOMAN	-	20.00000	0 ft	150	-
FIX	-	116.67167	0 m	-	-
MIKIN	-	19.33519	0 ft	90	-
FIX	-	118.10975	0 m	-	-
LIMLE	-	16.66167	0 ft	697	-
FIX	-	130.00000	0 m	-	-
1700N14000E	-	17.00000	0 ft	575	-
LATLON	-	140.00000	0 m	-	-
TERYY	-	17.71667	0 ft	288	-
FIX	-	144.98333	0 m	-	-
1800N15000E	-	18.00000	0 ft	287	-
LATLON	-	150.00000	0 m	-	-
1900N16000E	-	19.00000	0 ft	572	-
LATLON	-	160.00000	0 m	-	-
2000N17000E	-	20.00000	0 ft	569	-
LATLON	-	170.00000	0 m	-	-
2000N18000E	-	20.00000	0 ft	564	-
LATLON	-	180.00000	0 m	-	-
2000N17000W	-	20.00000	0 ft	564	-
LATLON	-	-170.00000	0 m	-	-
CHOKO	-	20.37734	0 ft	514	-
FIX	-	-160.88310	0 m	-	-
PHNL	-	21.31938	0 ft	175	Honolulu Intl
APT	-	-157.92128	0 m	-	

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.238 W

METAR

VHHH 131930Z 09013KT 9999 FEW015 SCT045 24/19 Q1012 NOSIG

TAF

TAF VHHH 131700Z 1318/1424 09010KT 9999 FEW015 SCT030 TX29/1406Z TN23/1322Z TN24/1422Z BECMG 1403/1405 27010KT BE

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m

PHNL

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 4

Elevation: 13 ft / 4 m
Location: 21.319400 -157.921000
Magnetic Var: 9.259 E

METAR

PHNL 131853Z 13007KT 10SM FEW025 SCT070 26/21 A3004

TAF

TAF PHNL 131720Z 1318/1424 VRB05KT P6SM FEW025 SCT060 FM132100 14011KT P6SM VCSH SCT025 BKN050 FM140600 VRB05KT P

Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.58		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.75		0 m	212 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m