

# ZUUU

Chengdu Shuangliu Intl


# ZUNZ

Linzhi Nyingchi

2024/05/30 0230Z

ZUUU KAMAX **B213** LEDIM ZUNZ

578.26 nm / 1070.93 km

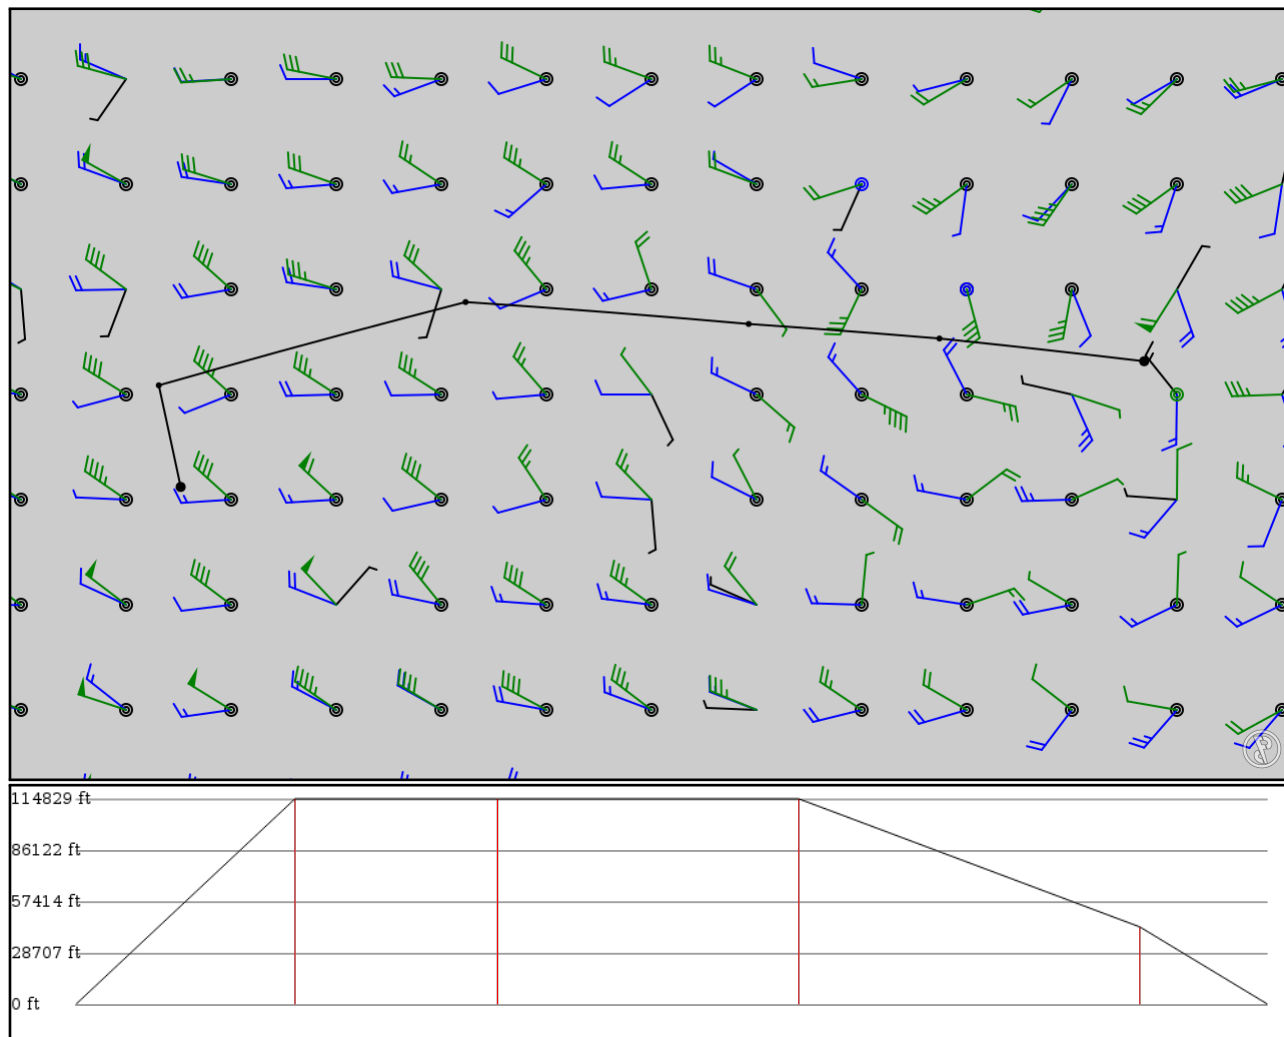

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ZUUU APT	-	30.55650 103.94500	0 ft 0 m	-	Chengdu Shuangliu Intl
KAMAX FIX	-	30.78330 101.90300	35,000 ft 10,668 m	106	-
PEXUN FIX	B213 AWY-HI	30.92830 100.00000	35,000 ft 10,668 m	98	-
RG NDB	B213 AWY-HI	31.14670 97.17670	35,000 ft 10,668 m	145	CHANGDU
LEDIM FIX	B213 AWY-HI	30.31670 94.11670	13,200 ft 4,023 m	165	-
ZUNZ APT	-	29.30370 94.33500	0 ft 0 m	61	Linzhi Nyingchi

## ZUUU

Region: CHINA  
Timezone: ASIA/CHONGQING  
Runways: 2

Elevation: 1,680 ft / 512 m  
Location: 30.556500 103.945000  
Magnetic Var: 2.091 W

## METAR

ZUUU 300200Z 24003MPS 210V300 CAVOK 24/17 Q1015 NOSIG

## TAF

TAF ZUUU 292106Z 3000/3024 22003MPS 6000 SCT040 TX30/3007Z TN21/3022Z

## Frequencies

REC - 126.45 MHz - ATIS	REC - 128.60 MHz - ATIS
CLD - 121.60 MHz - CHENGDU DELIVERY	GND - 121.85 MHz - CHENGDU GROUND
GND - 121.75 MHz - CHENGDU GROUND	GND - 121.70 MHz - CHENGDU GROUND
GND - 121.90 MHz - SHUANGLIU APRON	GND - 121.80 MHz - SHUANGLIU APRON
GND - 121.65 MHz - SHUANGLIU APRON	TWR - 123.00 MHz - CHENGDU TOWER
TWR - 130.35 MHz - CHENGDU TOWER	TWR - 118.85 MHz - CHENGDU TOWER
APP - 124.85 MHz - CHENGDU APPROACH	APP - 119.70 MHz - CHENGDU APPROACH
APP - 119.25 MHz - CHENGDU APPROACH	APP - 124.75 MHz - CHENGDU APPROACH
APP - 119.42 MHz - CHENGDU APPROACH	APP - 127.70 MHz - CHENGDU APPROACH
APP - 125.25 MHz - CHENGDU APPROACH	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02R	197 ft	11,848 ft	21.83	CONCRETE	0 ft	394 ft
	60 m	3,611 m	23.92		0 m	120 m
20L	197 ft	11,848 ft	201.83	CONCRETE	0 ft	394 ft
	60 m	3,611 m	203.92		0 m	120 m
02L	148 ft	11,839 ft	21.84	ASPHALT	0 ft	197 ft
	45 m	3,609 m	23.93		0 m	60 m
20R	148 ft	11,839 ft	201.84	ASPHALT	0 ft	200 ft
	45 m	3,609 m	203.93		0 m	61 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02L	LOC-ILS	IZW	111.10 MHz	18 nm	21.85	-	1,681 ft
				33 km	23.94		1,681 m
02R	LOC-ILS	ICR	108.70 MHz	18 nm	21.86	-	1,681 ft
				33 km	23.95		1,681 m
20L	LOC-ILS	IDE	109.70 MHz	18 nm	201.86	-	1,681 ft
				33 km	203.95		1,681 m
20R	LOC-ILS	IAA	109.10 MHz	18 nm	201.85	-	1,681 ft
				33 km	203.94		1,681 m
02L	GS	IZW	111.10 MHz	10 nm	21.85	3.00	1,681 ft
				19 km	23.94		1,681 m
02R	GS	ICR	108.70 MHz	10 nm	21.86	3.00	1,681 ft
				19 km	23.95		1,681 m
20L	GS	IDE	109.70 MHz	10 nm	201.86	3.00	1,681 ft
				19 km	203.95		1,681 m
20R	GS	IAA	109.10 MHz	10 nm	201.85	3.00	1,681 ft
				19 km	203.94		1,681 m