


2024/05/23 0404Z

VHHH MAGOG A1 ANPOG RCWA

326.45 nm / 604.58 km

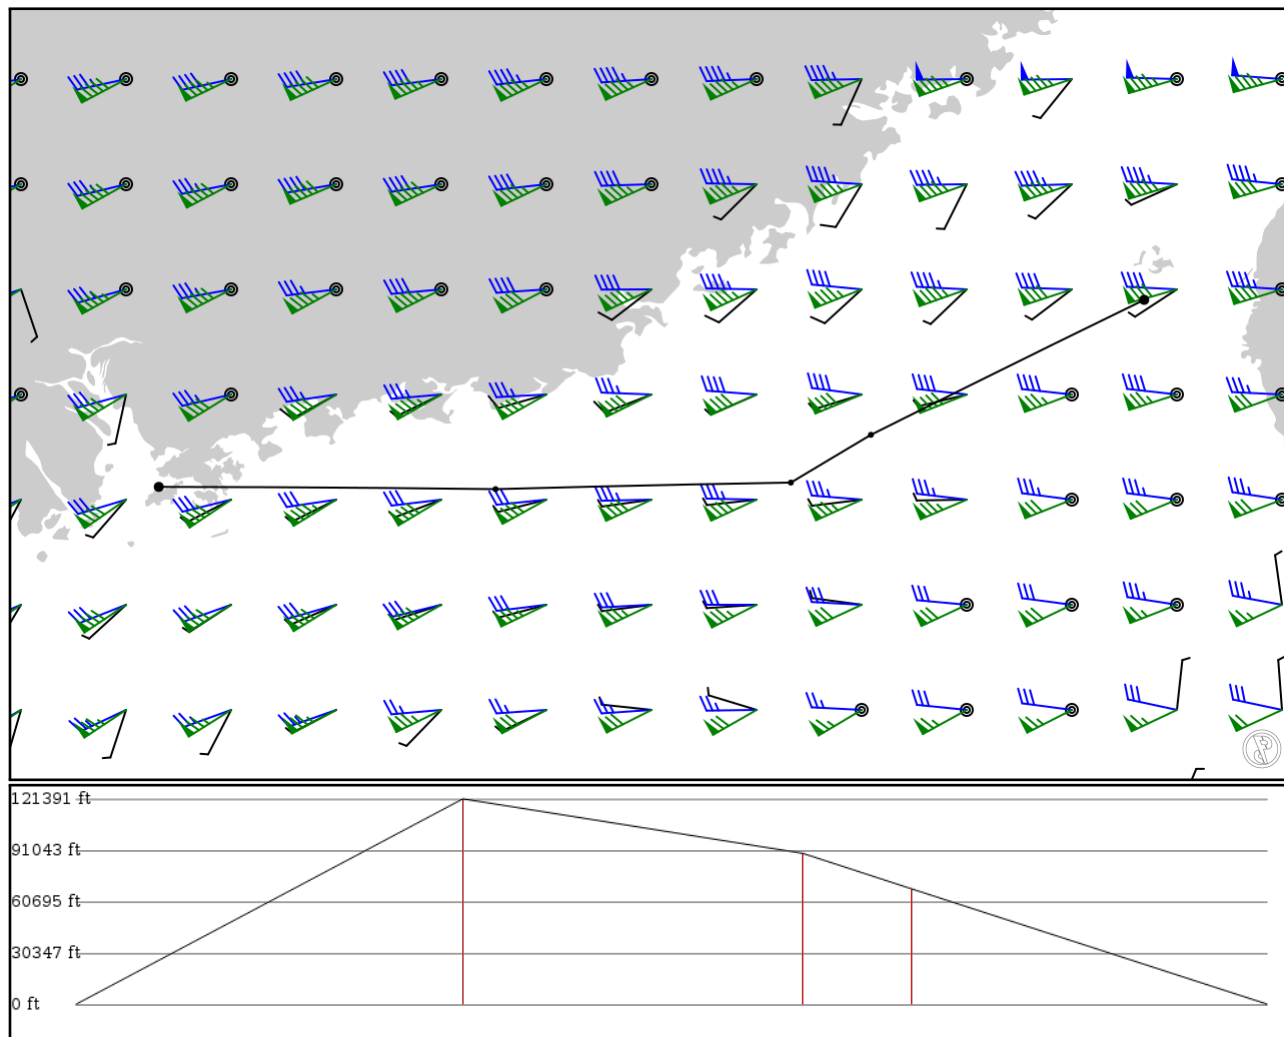

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 37000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VHHH	-	22.30890	0 ft	-	Hong Kong Intl
APT	-	113.91500	0 m	-	
MAGOG	-	22.29610	37,000 ft	106	-
FIX	-	115.82500	11,278 m	-	
ELATO	A1	22.33330	27,200 ft	93	-
FIX	AWY-HI	117.50000	8,291 m	-	
ANPOG	A1	22.60420	20,800 ft	29	-
FIX	AWY-HI	117.95400	6,340 m	-	
RCWA	-	23.36920	0 ft	97	WANG AN
APT	-	119.50400	0 m	-	

## VHHH

Region: HONG KONG  
Timezone: UNKNOWN  
Runways: 2

Elevation: 27 ft / 8 m  
Location: 22.308900 113.915000  
Magnetic Var: 3.240 W

## METAR

VHHH 230330Z 09007KT 060V140 9999 -SHRA FEW007 SCT030 28/24 Q1010 NOSIG

## TAF

TAF VHHH 230200Z 2303/2409 12010KT 9999 FEW010 SCT025 TX29/2306Z TX28/2406Z TN25/2322Z TEMPO 2303/2306 24010KT 40

## Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m