


2024/05/12 0059Z

AYNZ MBE **3E69** GUA **3E61** GNY **B598** HN **B452** NN **G224** BIGEK NSTU

2733.40 nm / 5062.26 km

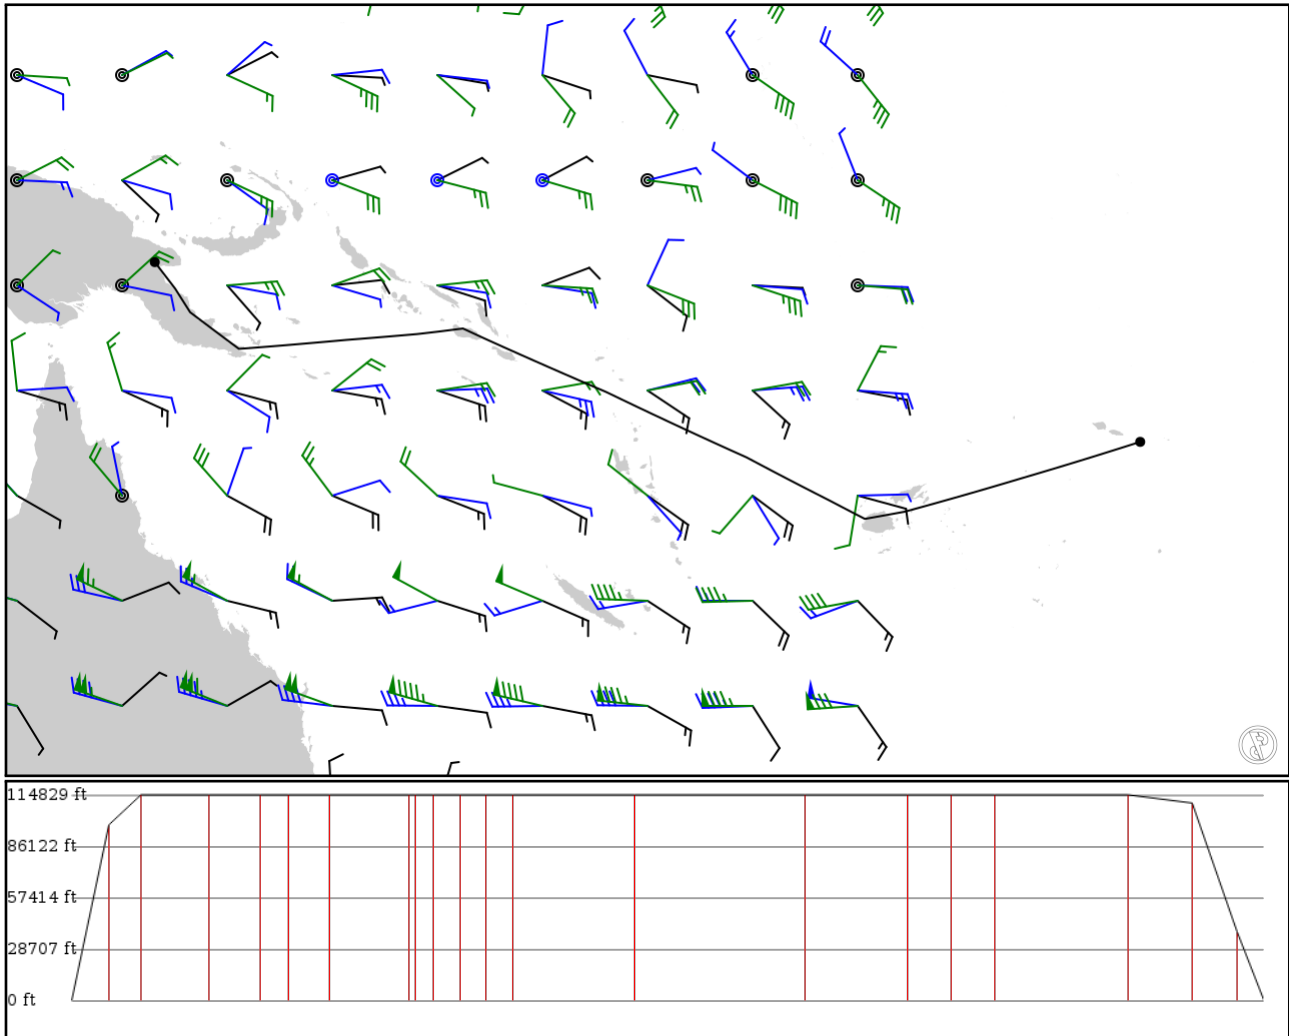

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
AYNZ	-	-6.56983	0 ft	-	Nadzab
APT	-	146.72616	0 m		
MBE	-	-7.71833	29,900 ft	86	-
VOR	-	147.60833	9,114 m		
GUA	3E69	-8.73611	35,000 ft	72	GIRUA NDB-DME
NDB	AWY-HI	148.25417	10,668 m		
GNV	3E61	-10.31583	35,000 ft	156	GURNEY VOR-DME
VOR	AWY-HI	150.36172	10,668 m		
GUVOG	B598	-10.15833	35,000 ft	118	-
FIX	AWY-HI	152.36167	10,668 m		
REDOX	B598	-10.06667	35,000 ft	63	-
FIX	AWY-HI	153.43167	10,668 m		
NIPOK	B598	-9.92833	35,000 ft	93	-
FIX	AWY-HI	155.00000	10,668 m		
IDSEK	B598	-9.67500	35,000 ft	182	-
FIX	AWY-HI	158.07000	10,668 m		
THARS	B598	-9.64333	35,000 ft	16	-
FIX	AWY-HI	158.34333	10,668 m		
ARDGU	B598	-9.56500	35,000 ft	39	-
FIX	AWY-HI	159.01333	10,668 m		
HN	B598	-9.43511	35,000 ft	61	HONIARA VOR-DME
VOR	AWY-HI	160.03731	10,668 m		
SONDA	B452	-9.85500	35,000 ft	59	-
FIX	AWY-HI	160.94167	10,668 m		
ATVIG	B452	-10.29167	35,000 ft	62	-
FIX	AWY-HI	161.91000	10,668 m		
LEGOT	B452	-12.17667	35,000 ft	278	-
FIX	AWY-HI	166.22167	10,668 m		
TAVER	B452	-15.00000	35,000 ft	392	-
FIX	AWY-HI	172.28667	10,668 m		
INTID	B452	-16.85833	35,000 ft	234	-
FIX	AWY-HI	175.86333	10,668 m		
NN	B452	-17.65472	35,000 ft	100	NADI VOR-DME
VOR	AWY-HI	177.39583	10,668 m		
LUPLO	G224	-17.34500	35,000 ft	100	-
FIX	AWY-HI	179.11500	10,668 m		
BODER	G224	-15.90000	35,000 ft	303	-
FIX	AWY-HI	-175.82806	10,668 m		
LANAT	G224	-15.15983	33,600 ft	149	-
FIX	AWY-HI	-173.35964	10,241 m		
BIGEK	G224	-14.63761	11,700 ft	102	-
FIX	AWY-HI	-171.68044	3,566 m		
NSTU	-	-14.33006	0 ft	59	Pago Pago
APT	-	-170.71024	0 m		

NSTU

Region: AMERICAN SAMOA
Timezone: UNKNOWN
Runways: 2

Elevation: 0 ft / 0 m
Location: -14.330100 -170.710000
Magnetic Var: 12.022 E

METAR

NSTU 112350Z 14009G15KT 12SM SCT019 BKN040 BKN100 29/24 A2986 RMK SLP113 8/420 T02890241 10293 20282 57012

TAF

TAF NSTU 112328Z 1200/1224 15012G20KT P6SM VCSH SCT020 BKN040 BKN120

Frequencies

COM - 122.90 MHz - CTAF
APP - 126.90 MHz - FALEOLO APP/DEP

COM - 118.30 MHz - UNICOM

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	151 ft	10,016 ft	60.00	ASPHALT	1,001 ft	390 ft
	46 m	3,053 m	47.98		305 m	119 m
23	151 ft	10,016 ft	240.00	ASPHALT	784 ft	226 ft
	46 m	3,053 m	227.98		239 m	69 m
08	98 ft	3,907 ft	89.93	ASPHALT	0 ft	371 ft
	30 m	1,191 m	77.91		0 m	113 m
26	98 ft	3,907 ft	269.93	ASPHALT	112 ft	0 ft
	30 m	1,191 m	257.90		34 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	DME	ITUT	110.30 MHz	18 nm	-	-	9 ft
				33 km	-		9 m
05	LOC-ILS	ITUT	110.30 MHz	18 nm	58.08	-	9 ft
				33 km	46.05		9 m
05	GS	ITUT	110.30 MHz	10 nm	60.00	3.25	28 ft
				19 km	47.98		28 m