


2024/06/07 2216Z

KMIA AMNDA **A699** RAMJT **AR18** DIW **J174** ORF **J121** SAWED **J209** SBY KPHL

901.12 nm / 1668.87 km

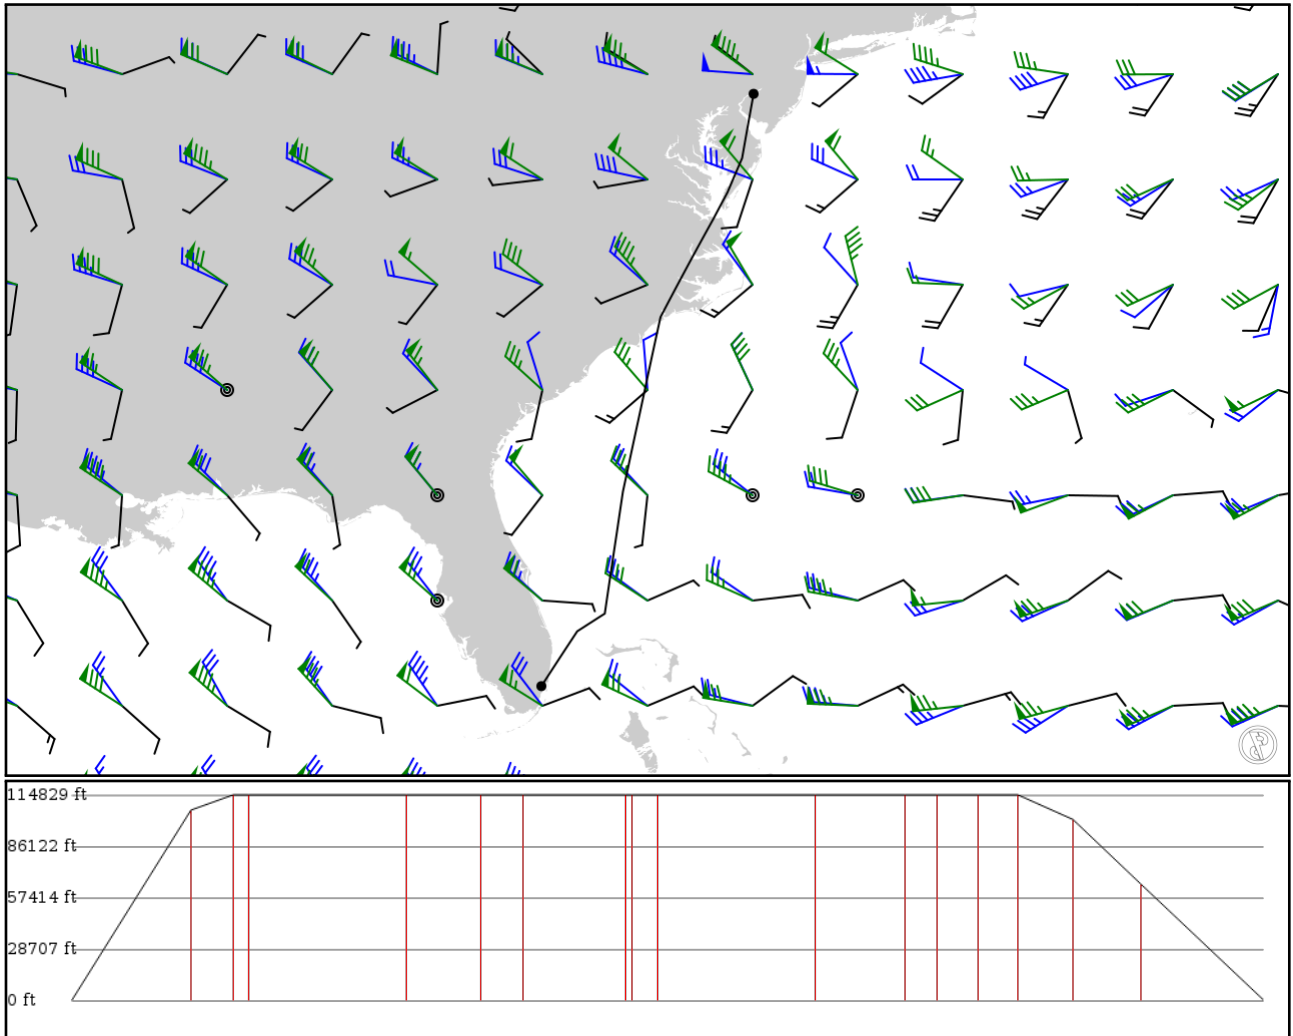

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMIA	-	25.79620	0 ft	-	Miami Intl
APT	-	-80.28970	0 m	-	
AMNDA	-	27.10000	32,400 ft	90	-
FIX	-	-79.43640	9,876 m	-	-
PERMT	A699	27.41420	35,000 ft	32	-
FIX	AWY-HI	-78.94730	10,668 m	-	-
RAMJT	A699	27.52040	35,000 ft	10	-
FIX	AWY-HI	-78.78000	10,668 m	-	-
ETECK	AR18	29.48570	35,000 ft	119	-
FIX	AWY-HI	-78.48730	10,668 m	-	-
OZENA	AR18	30.41940	35,000 ft	56	-
FIX	AWY-HI	-78.34830	10,668 m	-	-
LANIE	AR18	30.94160	35,000 ft	31	-
FIX	AWY-HI	-78.23560	10,668 m	-	-
LURKS	AR18	32.21610	35,000 ft	77	-
FIX	AWY-HI	-77.96070	10,668 m	-	-
MILOE	AR18	32.29110	35,000 ft	4	-
FIX	AWY-HI	-77.94440	10,668 m	-	-
PANAL	AR18	32.60910	35,000 ft	19	-
FIX	AWY-HI	-77.87580	10,668 m	-	-
DIW	AR18	34.56850	35,000 ft	119	DIXON
NDB	AWY-HI	-77.45290	10,668 m	-	
CLAPY	J174	35.59470	35,000 ft	67	-
FIX	AWY-HI	-76.90950	10,668 m	-	-
GILMA	J174	35.97670	35,000 ft	25	-
FIX	AWY-HI	-76.70340	10,668 m	-	-
EDDYS	J174	36.44040	35,000 ft	30	-
FIX	AWY-HI	-76.45010	10,668 m	-	-
ORF	J174	36.89190	35,000 ft	29	NORFOLK
VOR	AWY-HI	-76.20030	10,668 m	-	
SAWED	J121	37.53350	30,800 ft	41	-
FIX	AWY-HI	-75.85810	9,388 m	-	-
SBY	J209	38.34500	19,800 ft	51	SALISBURY
VOR	AWY-HI	-75.51060	6,035 m	-	
KPHL	-	39.87410	0 ft	92	Philadelphia Intl
APT	-	-75.23680	0 m	-	

## KMIA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 11 ft / 3 m  
Location: 25.796200 -80.289700  
Magnetic Var: 7.281 W

## METAR

KMIA 072153Z 10SM FEW030 FEW050 SCT110 BKN200 27/22 A2987 RMK A02 SLP114 CB DSNT SW AND NW T02720222

## TAF

KMIA 072058Z 0721/0824 18010KT P6SM VCTS SCT025CB BKN050 FM080000 VRB04KT P6SM SCT040 SCT250 FM081600 17007KT P6SM

## Frequencies

REC - 119.15 MHz - D-ATIS  
COM - 123.00 MHz - UNICOM  
GND - 121.80 MHz - MIAMI GROUND  
TWR - 118.30 MHz - MIAMI TOWER  
APP - 120.50 MHz - MIAMI APPROACH  
APP - 125.75 MHz - MIAMI APPROACH  
DEP - 125.50 MHz - MIAMI DEPARTURE

REC - 133.67 MHz - D-ATIS  
CLD - 135.35 MHz - CLEARANCE DELIVERY  
GND - 127.50 MHz - MIAMI GROUND  
TWR - 123.90 MHz - MIAMI TOWER  
APP - 124.85 MHz - MIAMI APPROACH  
DEP - 119.45 MHz - MIAMI DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.65		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.67		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.66		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.67		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.66		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.67		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.89		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.90		289 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.88		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.88		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.64		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.64		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.88		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.88		4 m

## KPHL

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 36 ft / 11 m  
Location: 39.874100 -75.236800  
Magnetic Var: 11.989 W

## METAR

KPHL 072154Z 28012KT 10SM SCT085 SCT110 29/10 A2962 RMK A02 PK WND 27028/2059 SLP030 T02890100 \$

## TAF

TAF AMD KPHL 072058Z 0721/0824 28014G22KT P6SM SCT080 SCT110 FM080000 28008KT P6SM FEW080 FM081400 28011G19KT P6S

## Frequencies

REC - 133.40 MHz - D-ATIS	REC - 135.92 MHz - D-ATIS
COM - 122.95 MHz - PHILADELPHIA UNICOM	GND - 121.65 MHz - PHILADELPHIA GROUND
GND - 121.90 MHz - PHILADELPHIA GROUND	TWR - 118.50 MHz - PHILADELPHIA TOWER
TWR - 135.10 MHz - PHILADELPHIA TOWER	CLD - 118.85 MHz - CLEARANCE DELIVERY
DEP - 119.75 MHz - PHILADELPHIA DEPARTURE	DEP - 124.35 MHz - PHILADELPHIA DEPARTURE
APP - 123.80 MHz - PHILADELPHIA APPROACH	APP - 124.35 MHz - PHILADELPHIA APPROACH
APP - 126.85 MHz - PHILADELPHIA APPROACH	APP - 127.35 MHz - PHILADELPHIA APPROACH
APP - 128.40 MHz - PHILADELPHIA APPROACH	APP - 133.87 MHz - PHILADELPHIA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09R	200 ft	11,981 ft	75.41	ASPHALT	0 ft	292 ft
	61 m	3,652 m	87.40		0 m	89 m
27L	200 ft	11,981 ft	255.44	ASPHALT	1,909 ft	397 ft
	61 m	3,652 m	267.43		582 m	121 m
09L	150 ft	9,482 ft	75.42	ASPHALT	0 ft	413 ft
	46 m	2,890 m	87.40		0 m	126 m
27R	150 ft	9,482 ft	255.44	ASPHALT	0 ft	397 ft
	46 m	2,890 m	267.43		0 m	121 m
17	150 ft	6,508 ft	159.13	ASPHALT	0 ft	200 ft
	46 m	1,984 m	171.12		0 m	61 m
35	150 ft	6,508 ft	339.14	ASPHALT	0 ft	200 ft
	46 m	1,984 m	351.13		0 m	61 m
08	150 ft	4,992 ft	75.44	ASPHALT	0 ft	197 ft
	46 m	1,521 m	87.43		0 m	60 m
26	150 ft	4,992 ft	255.45	ASPHALT	0 ft	0 ft
	46 m	1,521 m	267.44		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IVII	108.95 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
09R	DME	IPHL	109.30 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
26	DME	ILLH	111.55 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
27L	DME	IGLC	109.30 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
27R	DME	IPDP	108.95 MHz	18 nm	-	-	38 ft
				33 km	-		38 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	LOC-ILS	IVII	108.95 MHz	18 nm	75.43	-	36 ft
				33 km	87.42		36 m
09R	LOC-ILS	IPHL	109.30 MHz	18 nm	75.43	-	36 ft
				33 km	87.42		36 m
17	LOC-ILS	IMMY	108.75 MHz	18 nm	159.14	-	36 ft
				33 km	171.13		36 m
27L	LOC-ILS	IGLC	109.30 MHz	18 nm	255.43	-	36 ft
				33 km	267.42		36 m
27R	LOC-ILS	IPDP	108.95 MHz	18 nm	255.43	-	36 ft
				33 km	267.42		36 m
09L	GS	IVII	108.95 MHz	10 nm	75.43	3.00	36 ft
				19 km	87.42		36 m
09R	GS	IPHL	109.30 MHz	10 nm	75.43	3.00	36 ft
				19 km	87.42		36 m
17	GS	IMMY	108.75 MHz	10 nm	159.14	3.00	36 ft
				19 km	171.13		36 m
27L	GS	IGLC	109.30 MHz	10 nm	255.43	3.00	36 ft
				19 km	267.42		36 m
27R	GS	IPDP	108.95 MHz	10 nm	255.43	3.00	36 ft
				19 km	267.42		36 m